

Project		Catalog #		Type	
Prepared by		Notes		Date	



## Fail-Safe

### Vandal Resistant Vaportite LED

2' and 4' Tamper Resistant LED Vaportite

#### Typical Applications

Parking Garage • Cold Storage • Canopy • Warehouse • Food Processing • Manufacturing • Complex Environments

#### Interactive Menu

- Order Information [page 2](#)
- Photometric Data [page 3](#)
- Product Warranty

#### Product Certification




#### Product Features



#### Top Product Features


- Compact and durable fiberglass reinforced polyester housing
- Precision optics in general, wide, or parking garage distribution
- High Impact Polycarbonate optical lens
- Available in 2ft and 4ft, with lumen packages up to 8,000 lumens
- Wet Location and IP67 Listed
- Options to meet Buy American and other domestic preference requirements

#### Dimensional, Mounting Details

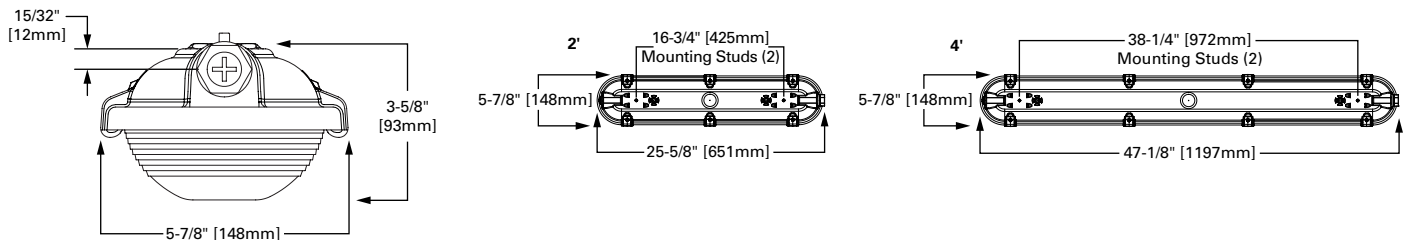


#### Installation Data


##### STANDARD

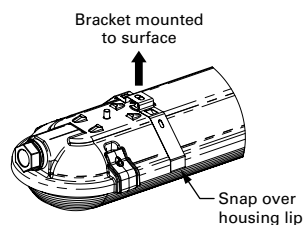

##### V-HANGER (optional)



##### SURFACE BRACKET (optional)



## Order Information

SAMPLE ORDER NUMBER: **4VRVT3-LD5-6-G-UNV-L840-CD1-U**

Domestic Preferences	Series	Lamp Type	LED Lumens Output	Distribution	Voltage	Remote Emergency Enclosure
Domestic Preferences <sup>(11)</sup>	Series	Lamp Type	LED Lumens Output	Distribution <sup>(7), (8)</sup>	Voltage	Remote Emergency Enclosure
<b>[Blank]</b> =Standard <b>BAA</b> =Buy American Act <b>TAA</b> =Trade Agreements Act	<b>2VRVT3</b> =2' Vaportite <b>4VRVT3</b> =4' Vaportite	<b>LD5</b> =LED 5.0	<b>2 ft.</b> 2=2000 Lumens 3=3000 Lumens 4=4000 Lumens <b>4 ft.</b> 4=4000 Lumens 5=5000 Lumens 6=6000 Lumens 8=8000 Lumens	<b>G</b> =General Distribution <b>W</b> =Wide Distribution <b>P</b> =Parking Garage Distribution <b>WPC</b> =Wide Distribution, Polycarbonate <b>PPC</b> =Parking Distribution, Polycarbonate	<b>120V</b> =120 Volt <b>277V</b> =277 Volt <b>347V</b> =347 Volt <b>480V</b> =480 Volt <b>UNV</b> =Universal Voltage 120-277 Volt <b>UNC</b> =Universal Voltage 347-480 Volt	<b>EL10W</b> =10-watt, 120-277V emergency battery pack installed <sup>(1), (2), (5)</sup> <b>VT-REM-EL10W</b> =Remote mounted 10-watt, 120-277V emergency battery pack <sup>(1), (6)</sup>
<b>Notes</b> <small>(11) Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to <a href="#">DOMESTIC PREFERENCES</a> website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.</small>				<b>Notes</b> <small>(7) General distribution provided with smooth frosted lens, Wide distribution provided with frosted prismatic lens, and Parking Garage distribution provided with clear prismatic lens. (8) IP69 only available in Wide or Parking Garage distributions.</small>		<b>Notes</b> <small>(1) EL and REM-EL options not available with UNC, 347V and 480V configurations. (2) EL10W available in 4ft 4000 and 6000 lumen packages only. (3) IP ratings require fixtures be mounted horizontally. (4) Specify voltage when ordering sensor option. (5) EL10W option rated for max. 35°C ambient. (6) VT-REM-EL10W option rated for max. 45°C ambient.</small>

Lamps	Driver Type	Label	Options	Packaging	Accessories
Lamps	Driver Type	Label	Options	Packaging	Accessories (order separately) <sup>(12)</sup>
<b>L835</b> =3500K, LED <b>L840</b> =4000K, LED <b>L850</b> =5000K, LED <b>LG52</b> =Green 520nm LED <b>LA59</b> =Amber 590nm LED <b>LR63</b> =Red 630nm LED	<b>CD1</b> =1 Dimming Driver <b>5LTD1</b> =Fifth Light DALI	<b>WL</b> =Wet Location Label	<b>SSL</b> =Stainless Steel Latches <b>MSWL20</b> =Wet Listed Motion Sensor 360° <b>HBE11</b> =Wet location PIR Indoor/Outdoor Occupancy Sensor <sup>(10)</sup>	<b>U</b> =Unit Pack	<b>VT3-SS-VBK</b> =Stainless Steel V-Bracket (2 per kit) <b>VT3-SS-SBK</b> =Stainless Steel Surface Bracket (2 per kit)
			<b>Notes</b> <small>(10) Available for 120V, 277V, and 347V voltage only.</small>		<b>Notes</b> <small>(12) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.</small>

## Product Specifications

### Construction

- Rugged and durable construction
- Fiberglass housing is reinforced polyester and self-extinguishing (ASTM-D635-74) plastic
- Full metal fixture liner
- Watertight housing
- 1/2" conduit entry at each end of housing (standard) for continuous feed
- Polyurethane gasketing provides a continuous seamless seal for the diffuser lens
- Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser
- Stainless steel latches option
- Surface or chain mounting
- Torx (R) Tamperproof Screws to prevent unauthorized access

### Electrical

- Long-Life LED system coupled with electrical driver for optimal performance
- LED's available in 3500K, 4000K and 5000K with a CRI ≥ 80
- Projected life is 60,000 hours at 91% lumen output
- Electronic drivers are available for 120-277V applications
- 0-10V dimming control (standard)
- Operating temperature of -40°C to 55°C; Ideal for cold storage environments

### Lens

- Thermofomed low profile, high impact 50% DR High acrylic lens
- Smooth frosted lens for general distribution
- Frosted prismatic lens for wide distribution
- Clear prismatic lens for parking garage distribution

### Warranty


- Five-year limited warranty

### Compliance


- UL/cUL listed for Wet location
- RoHS compliant
- LED modules comply with IESNA LM-79 and LM-80 standards
- NEMA 4X, IP65, IP66 and IP67 rated (see installation instructions for requirements)
- IP69 rated with wide or parking garage distributions
- NSF International certified for NSF/ANSI Standard 2 – Food Equipment

## Photometric Data


[View IES files](#)

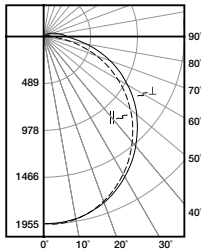

**4VRVT3-LD5-6-G-UNV-L840-CD1-U**  
 Electronic Driver  
 Linear LED 4000K  
 Spacing criterion: (H) 1.24 x mounting height,  
 (L) 1.26 x mounting height  
 Lumens: 6033  
 Input Watts: 51.1W  
 Efficacy: 118.1 lm/W  
 Test Report:  
 4VRVT3-LD5-6-G-UNV-L840-CD1-U.IES

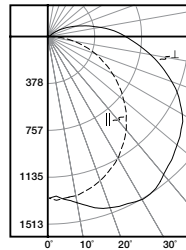

**4VRVT3-LD5-6-W-UNV-L840-CD1-U**  
 Electronic Driver  
 Linear LED 4000K  
 Spacing criterion: (H) 1.27 x mounting height,  
 (L) 1.67 x mounting height  
 Lumens: 6655  
 Input Watts: 49.3W  
 Efficacy: 135 lm/W  
 Test Report:  
 4VRVT3-LD5-6-W-UNV-L840-CD1-U.IES



**4VRVT3-LD5-6-P-UNV-L840-CD1-U**  
 Electronic Driver  
 Linear LED 4000K  
 Spacing criterion: (H) 1.45 x mounting height,  
 (L) 2.17 x mounting height  
 Lumens: 6050  
 Input Watts: 49.3W  
 Efficacy: 122.7 lm/W  
 Test Report:  
 4VRVT3-LD5-6-P-UNV-L840-CD1-U.IES

## Energy and Performance Data by Catalog Number

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours) <sup>(1)</sup>	Theoretical L70 (Hours) <sup>(2)</sup>
25°C	> 91%	> 247,000

**Notes:** (1) Supported by IES TM-21 standards. (2) Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

### Ambient Ratings

2ft. Lumen Package	Ambient Rating
2VRVT3-LD5-2	55°C
2VRVT3-LD5-3	50°C
2VRVT3-LD5-4	50°C

4ft. Lumen Package	Ambient Rating
4VRVT3-LD5-4	55°C
4VRVT3-LD5-5	50°C
4VRVT3-LD5-6	50°C
4VRVT3-LD5-8	45°C

### Input Watts:

4VRVT3-LD5-4 (4,000 lumens)=31W
4VRVT3-LD5-5 (5,000 lumens)=44W
4VRVT3-LD5-6 (6,000 lumens)=49W
4VRVT3-LD5-8 (8,000 lumens)=69W

### Shipping Data

Catalog No.	Wt.
4VRVT3-LD5	12 lbs.

## Energy and Performance Data by Catalog Number

### White LED

Catalog Number	Description	Delivered Lumens	Watts	Efficacy (lm/W)
<b>General</b>				
2VRVT3-LD5-2-G-UNV-L850-CD1-U	2ft Vaportight, 2K Lumen, General Dist, 120-277V, 5000K, Dim	2203	16	138
2VRVT3-LD5-3-G-UNV-L850-CD1-U	2ft Vaportight, 3K Lumen, General Dist, 120-277V, 5000K, Dim	3334	24	139
2VRVT3-LD5-4-G-UNV-L850-CD1-U	2ft Vaportight, 4K Lumen, General Dist, 120-277V, 5000K, Dim	4366	32	136
4VRVT3-LD5-4-G-UNV-L850-CD1-U	4ft Vaportight, 4K Lumen, General Dist, 120-277V, 5000K, Dim	4428	32	138
4VRVT3-LD5-5-G-UNV-L850-CD1-U	4ft Vaportight, 5K Lumen, General Dist, 120-277V, 5000K, Dim	5405	44	124
4VRVT3-LD5-6-G-UNV-L850-CD1-U	4ft Vaportight, 6K Lumen, General Dist, 120-277V, 5000K, Dim	6490	51	127
4VRVT3-LD5-8-G-UNV-L850-CD1-U	4ft Vaportight, 8K Lumen, General Dist, 120-277V, 5000K, Dim	8694	67	130
<b>Wide</b>				
2VRVT3-LD5-2-W-UNV-L850-CD1-U	2ft Vaportight, 2K Lumen, Wide Dist, 120-277V, 5000K, Dim	2445	17	144
2VRVT3-LD5-3-W-UNV-L850-CD1-U	2ft Vaportight, 3K Lumen, Wide Dist, 120-277V, 5000K, Dim	3547	25	142
2VRVT3-LD5-4-W-UNV-L850-CD1-U	2ft Vaportight, 4K Lumen, Wide Dist, 120-277V, 5000K, Dim	4700	34	138
4VRVT3-LD5-4-W-UNV-L850-CD1-U	4ft Vaportight, 4K Lumen, Wide Dist, 120-277V, 5000K, Dim	4767	31	154
4VRVT3-LD5-5-W-UNV-L850-CD1-U	4ft Vaportight, 5K Lumen, Wide Dist, 120-277V, 5000K, Dim	5818	44	133
4VRVT3-LD5-6-W-UNV-L850-CD1-U	4ft Vaportight, 6K Lumen, Wide Dist, 120-277V, 5000K, Dim	7159	49	146
4VRVT3-LD5-8-W-UNV-L850-CD1-U	4ft Vaportight, 8K Lumen, Wide Dist, 120-277V, 5000K, Dim	9552	70	136
<b>Parking</b>				
2VRVT3-LD5-2-P-UNV-L850-CD1-U	2ft Vaportight, 2K Lumen, Parking Garage, 120-277V, 5000K, Dim	2228	17	131
2VRVT3-LD5-3-P-UNV-L850-CD1-U	2ft Vaportight, 3K Lumen, Parking Garage, 120-277V, 5000K, Dim	3231	25	129
2VRVT3-LD5-4-P-UNV-L850-CD1-U	2ft Vaportight, 4K Lumen, Parking Garage, 120-277V, 5000K, Dim	4271	34	126
4VRVT3-LD5-4-P-UNV-L850-CD1-U	4ft Vaportight, 4K Lumen, Parking Garage, 120-277V, 5000K, Dim	4338	31	140
4VRVT3-LD5-5-P-UNV-L850-CD1-U	4ft Vaportight, 5K Lumen, Parking Garage, 120-277V, 5000K, Dim	5294	44	121
4VRVT3-LD5-6-P-UNV-L850-CD1-U	4ft Vaportight, 6K Lumen, Parking Garage, 120-277V, 5000K, Dim	6509	49	133
4VRVT3-LD5-8-P-UNV-L850-CD1-U	4ft Vaportight, 8K Lumen, Parking Garage, 120-277V, 5000K, Dim	8671	69	126

### Color LED

Catalog Number	Description	Delivered Lumens	Watts	Efficacy (lm/W)
2VRVT3-LD5-2-G-UNV-LG52-CD1-U	2ft Vaportight, 2K Lumen, General Dist, 120-277V, Red 630nm, Dim	328	41	8
2VRVT3-LD5-2-G-UNV-LA59-CD1-U	2ft Vaportight, 2K Lumen, General Dist, 120-277V, Amber 590nm, Dim	573	24	24
2VRVT3-LD5-2-G-UNV-LR63-CD1-U	2ft Vaportight, 2K Lumen, General Dist, 120-277V, Green 520nm, Dim	1638	37	44
2VRVT3-LD5-3-G-UNV-LG52-CD1-U	2ft Vaportight, 3K Lumen, General Dist, 120-277V, Red 630nm, Dim	496	62	8
2VRVT3-LD5-3-G-UNV-LA59-CD1-U	2ft Vaportight, 3K Lumen, General Dist, 120-277V, Amber 590nm, Dim	868	37	24
2VRVT3-LD5-3-G-UNV-LR63-CD1-U	2ft Vaportight, 3K Lumen, General Dist, 120-277V, Green 520nm, Dim	2479	57	44
2VRVT3-LD5-4-G-UNV-LG52-CD1-U	2ft Vaportight, 4K Lumen, General Dist, 120-277V, Red 630nm, Dim	649	83	8
2VRVT3-LD5-4-G-UNV-LA59-CD1-U	2ft Vaportight, 4K Lumen, General Dist, 120-277V, Amber 590nm, Dim	1136	49	23
2VRVT3-LD5-4-G-UNV-LR63-CD1-U	2ft Vaportight, 4K Lumen, General Dist, 120-277V, Green 520nm, Dim	3246	76	43
4VRVT3-LD5-4-G-UNV-LG52-CD1-U	4ft Vaportight, 4K Lumen, General Dist, 120-277V, Red 630nm, Dim	659	84	8
4VRVT3-LD5-4-G-UNV-LA59-CD1-U	4ft Vaportight, 4K Lumen, General Dist, 120-277V, Amber 590nm, Dim	1152	49	24
4VRVT3-LD5-4-G-UNV-LR63-CD1-U	4ft Vaportight, 4K Lumen, General Dist, 120-277V, Green 520nm, Dim	3293	77	43
4VRVT3-LD5-6-G-UNV-LG52-CD1-U	4ft Vaportight, 6K Lumen, General Dist, 120-277V, Red 630nm, Dim	965	132	7
4VRVT3-LD5-6-G-UNV-LA59-CD1-U	4ft Vaportight, 6K Lumen, General Dist, 120-277V, Amber 590nm, Dim	1689	78	22
4VRVT3-LD5-6-G-UNV-LR63-CD1-U	4ft Vaportight, 6K Lumen, General Dist, 120-277V, Green 520nm, Dim	4826	122	40
4VRVT3-LD5-8-G-UNV-LG52-CD1-U	4ft Vaportight, 8K Lumen, General Dist, 120-277V, Red 630nm, Dim	1293	174	7
4VRVT3-LD5-8-G-UNV-LA59-CD1-U	4ft Vaportight, 8K Lumen, General Dist, 120-277V, Amber 590nm, Dim	2263	103	22
4VRVT3-LD5-8-G-UNV-LR63-CD1-U	4ft Vaportight, 8K Lumen, General Dist, 120-277V, Green 520nm, Dim	6465	160	40