

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

WP-AOK SERIES Adjustable LED Wall Pack

Rev: 12-2022

The WP-AOK Series is great for commercial and industrial applications. Adjustable output and color temperature options makes the WP-AOK the ideal choice for illuminating building perimeters.



Applications

Ideal for use in exterior commercial and industrial building perimeters.

Construction

Housing made from die-cast aluminum. Tempered glass lens.

Mounting

Wall Mount.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency. 5KV Surge Protection.

Operating Temperature

Suitable for -40°C – 40°C Ambient

CRI

70+

Finish

Standard in dark bronze. Black and white available on special request.

Lumen Maintenance

L70 rating of 54,000

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) 5.1 Premium listed!



Catalog Ordering

Sample Part #WP-L-15L-AOK

Series	Size & Lumens	Type	Finish	Controls	Options
WP					
WP	S-5L (Small / 20W-30W-40W) M-10L (Medium / 50W-70W-90W) L-15L (Large / 80W-100W-120W)	AOK (Adjustable Output and Kelvin Temp 30K, 40K & 50K)	Blank (Standard Dark Bronze) B (Black) ² W (White) ²	OSW (Wet Location Occupancy Sensor)	EM15W (WP-M Battery Backup, 15 Watts, ~1,845 lumens) ³ EM20W (WP-L Battery Backup, 20 Watts, ~2,460 lumens) ⁴

Electrical Data

Drivers: 120-277V

WP (Small)

20W: 120V: 0.1669A, 277V: 0.1017A

30W: 120V: 0.2303A, 277V: 0.1235A

40W: 120V: 0.3352A, 277V: 0.1575A

WP (Medium)

50W: 120V: 0.4198A, 277V: 0.2485A

70W: 120V: 0.5229A, 277V: 0.2782A

90W: 120V: 0.7384A, 277V: 0.3323A

WP (Large)

80W: 120V: 0.6653A, 277V: 0.3918A

100W: 120V: 0.8335A, 277V: 0.4417A

120W: 120V: 1.0154A, 277V: 0.4575A

Performance Data


FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	CRI	Replace	
WP-S-5L-AOK	Small	20	3000	2680	136	>70	2 x 13W Compact Fluorescent	
		20	4000	2751	143	>70		
		20	5000	2719	139	>70		
		50W High Pressure Sodium	30	3000	4049	130	>70	
			30	4000	4236	141	>70	
			30	5000	4116	133	>70	
			40	3000	5112	125	>70	
		70W High Pressure Sodium	40	4000	5395	137	>70	
40	5000		5169	127	>70			
WP-M-10L-AOK	Medium	50	3000	6849	133	>70	70W High Pressure Sodium	
		50	4000	7121	143	>70		
		50	5000	6901	135	>70		
		100W Metal Halide	70	3000	8379	130	>70	
			70	4000	8748	140	>70	
		175W Metal Halide	70	5000	8404	131	>70	
			90	3000	11199	123	>70	
			90	4000	11798	134	>70	
WP-L-15L-AOK	Large	90	5000	11334	124	>70		
		80	3000	10690	131	>70	175W Metal Halide	
		80	4000	10848	145	>70		
		80	5000	10555	131	>70		
		175W Metal Halide	100	3000	12897	125	>70	
			100	4000	13412	137	>70	
		250W Metal Halide	100	5000	12991	128	>70	
			120	3000	15438	123	>70	
120	4000		16546	137	>70			
	120	5000	15491	125	>70			

Physical Characteristics


Dimensions

Version	Depth	Length	Width	Weight
Small	4.75"	9.00"	9.00"	5.3lbs
Medium	4.75"	9.00"	13.00"	7.6lbs
Large	4.75"	9.00"	17.00"	11.8lbs


Front View

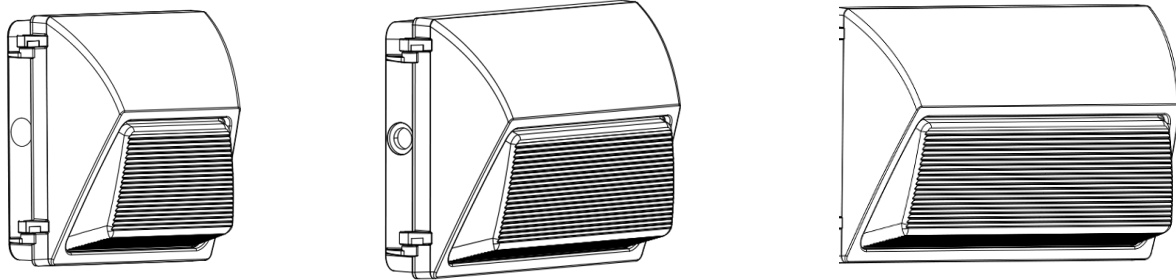

Back View

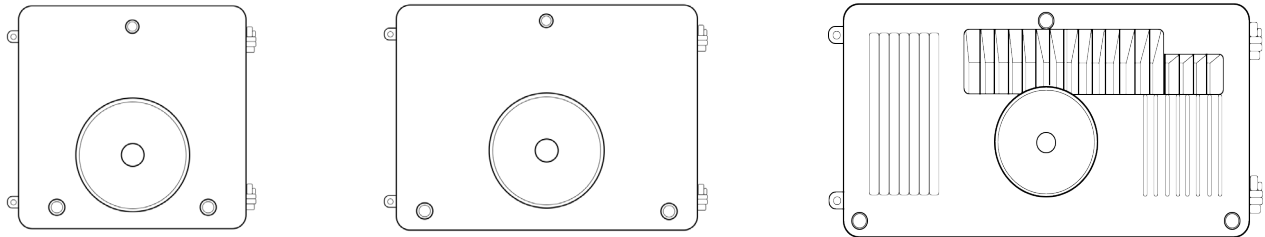

Side View

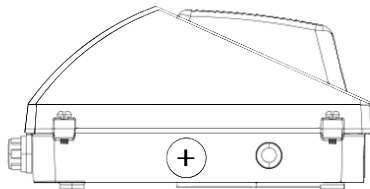

Notes

- 1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/ to confirm which versions are qualified.
- 2 Special order. MOQ 100 pieces. Contact factory for lead time.
- 3 Option only available for WP-M fixture.
- 4 Option only available for WP-L fixture.