

# LED Bullyte (BT5016) Specification Sheet


Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

## Ordering Guide

Example: BT5016 A LED7 NF W

<b>Product Code</b>	BT5016	LED Bullyte
<b>Finish</b>	A H	Black Bronze
<b>Source/Lumens</b>	LED7	7W LED
<b>Optics</b>	NF FL	Narrow Flood Flood
<b>CCT</b>	W	Warm

\*1 Fixture will be shipped with lamp. Lamp not sold separately.

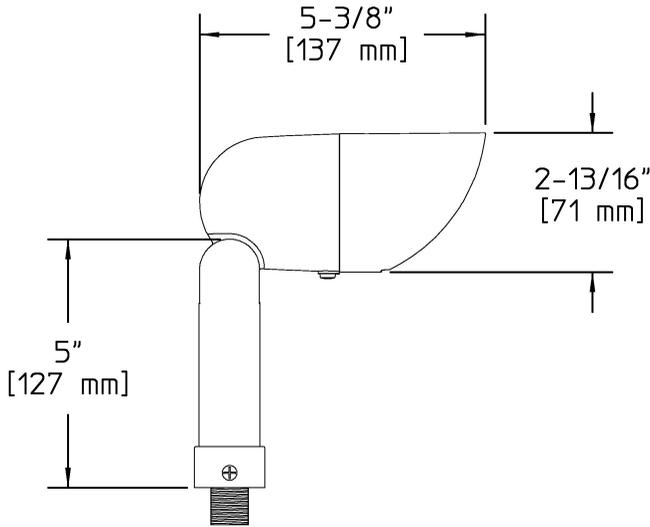

## Specifications

### HOUSING:

360 Die-cast marine grade aluminum. Fully-adjustable swivel arm with vibration-proof locking teeth. Fully rotatable shroud, double gasketed, die-cast marine grade alloy aluminum. Fasteners are 300 series stainless steel.

### FINISH:

Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting.

### OPTICAL ASSEMBLY:

Clear tempered glass affixed at 10° angle for natural cleaning.

### LAMPING:

7W lamp with 25° or 35° beam spread, 25,000 hours life. Color temperature (CCT): Warm White (3,000K nominal). No Mercury. Dimmable. Approximately 460 lumens.

### ELECTRICAL ASSEMBLY:

Bi-pin socket type (GU5.3) with 250° C high temperature teflon coated wire leads. Fixture is pre-wired with 18 AWG black, white, and ground wires. Step-down transformer reduces line voltage to 12 volts. Transformer is potted/encapsulated and features thermal overload protection. Can be used with energy-efficient halogen lamp.

### WARRANTY:

Five-year limited warranty.

### CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

### Width:

2 13/16" (71mm)

### Length:

5 3/8" (137mm)

### Max. Weight:

1.2 lb.