# Copper Pathlyte (CUL7) Specification Sheet

| Project Name: | Location: | MFG: Philips Hadco |
|---|---|---|
| Fixture Type: | Catalog No.: | Qty: |
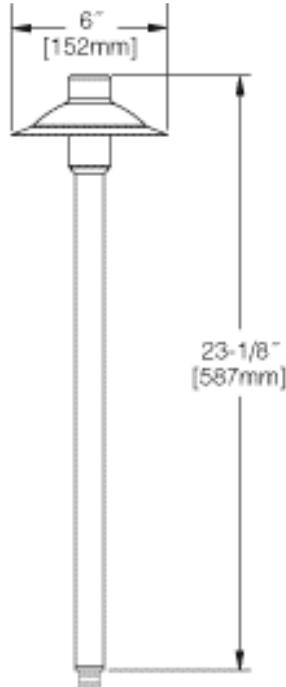
## Ordering Guide

Example: CUL7  S7  _

| Product Code | CUL7 | Copper Pathlyte | |
|---|---|---|---|
| **Mounting** | S7 | Mounting Stake | *1 |
| **Finish** | _ | Natural Copper | *2 |

*1 Mounting stake option available only with Natural Copper Pathlyte.
*2 When ordering Natural Copper, product code will read as CUL7.

## Specifications

**HOUSING:**
Spun solid copper roof with copper stem.  Machined copper threaded adapter for tool-less relamping.  ½" NPS male threads to screw onto accessory mounting stake or junction box, sold separately.

**FINISH:**
Natural Copper is bright polished, untreated copper. Color will age naturally to a fine dark copper patina.

**OPTICAL ASSEMBLY:**
Frosted tempered glass lens.  Reflective white powdercoat on underside of roof.

**LAMPING:**
20W maximum T3 bi-pin lamp.  Lamp is included with fixture.  Lower wattage lamps are acceptable.

**ELECTRICAL ASSEMBLY:**
Bi-pin socket type (G4) with 250° C high temperature teflon coated wire leads.  12 Volt fixture is pre-wired with 3-ft pigtail of 18-2 AWG, 105° C, SPT-1W wire.   Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included.  12 Volt system requires remote transformer, not included.

**WARRANTY:**
Ten-year limited warranty.

**CERTIFICATIONS:**
ETL listed to U.S. safety standards for wet locations.  cETL listed to Canadian safety standards for wet locations.  Manufactured to ISO 9001:2008 Standards.

**Height :**
19 1/8" (485 mm)

**Width:**
6" (152mm)

**Max. Weight:**
3.3 lb