




Tranquil Lighting—the Halcyon pendant seamlessly merges contemporary grace with a serene ambiance. Its acoustically designed exterior shape not only absorbs sound but also reduces reverberation. With an integrated 2” or 4” luminaire at its core, it emanates the perfect ambient light. Incorporating the Halcyon into spaces like lobbies, private offices, collaborative areas, or breakrooms adds a quintessential and functional touch. Choose from a diverse selection of sizes, shapes, and colors to match your preferences. This pendant family offers a lumen output range of 500 to 4000 lumens, ensuring abundant illumination for various needs.

50mm Beam Optics:



STYLE COLORS

STANDARD FINISHES




SPECIALTY FINISHES



BAFFLE FINISHES



ACCESSORIES

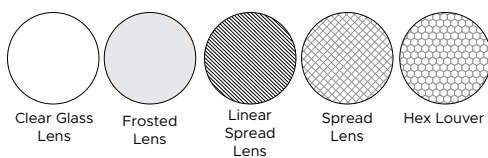

SPECIFICATIONS	
Lumen Output	500 - 2000lm
Optic Size	50mm
Beam Optics	13°, 20°, 26°, 35°, 55°
Baffle Type	Deep Smooth Finish (Depth 1")
	Deep Milli-Groove (Depth 1")
Baffle & Trim Finishes	White, Black, Satin Silver & Champagne
CRI - 80 (2-Step)	35K & 40K
CRI - 90 (2-Step)	27K, 30K, 35K, 40K *90 CRI Option has an R9 Value Greater than 50
Accessories Options	Hex Louver, Frosted Lens, Linear Spread Lens, Spread Lens, Clear Lens
Accessories Qty	One
Drivers	0-10V, TRIAC, ELV, Lutron Ecosystem, DALI
Dimming	1%, 5%, 0.1%
Voltage	120-277 Volt
Lumen Maintenance	80,000
Power Factor	> .95
THD	< 20kHz
Approved Location	Dry/Damp
Certifications	UL Listed




Suitable for Damp locations.

Specifications may change without notice.

Model Sequence

Ordering Guide

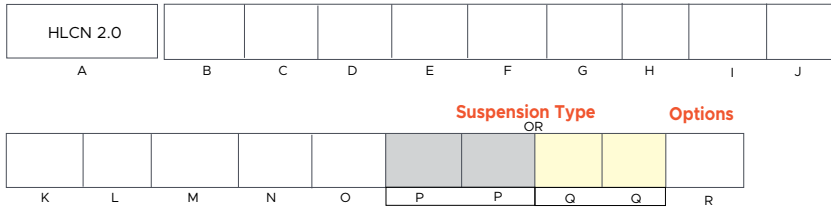

NOTES:



SAFETY US-CA
Suitable for Damp locations.



ACOUSTIC PENDANT

A. MODEL	B. STYLES	C. DISTRIBUTION
HLCN 2.0	<p>ROUND Pendant RD2-12 - 2" Cylinder - 11" x 11" RD2-18 - 2" Cylinder - 18" x 18"</p> <p>TAPERED Pendant TP2-12 - 2" Cylinder - 12" x 11" TP2-18 - 2" Cylinder - 19" x 18"</p> <p>ELLIPSOID Pendant EL2-12 - 2" Cylinder - 20" x 11" EL2-18 - 2" Cylinder - 31" x 17"</p> <p>APPLE Pendant AP2-12 - 2" Cylinder - 11" x 11" AP2-18 - 2" Cylinder - 19" x 18"</p>	<p>D Direct</p> <p>DRUM Pendant DR2-12 - 2" Cylinder - 15" x 11" DR2-18 - 2" Cylinder - 23" x 18"</p> <p>MONOLITH Pendant MN2-12 - 2" Cylinder - 8" x 11" MN2-18 - 2" Cylinder - 14" x 19"</p> <p>OVAL Pendant OV2-12 - 2" Cylinder - 24" x 11" OV2-18 - 2" Cylinder - 35" x 18"</p> <p>DOME Pendant DM2-12 - 2" Cylinder - 24" x 11" DM2-18 - 2" Cylinder - 36" x 18"</p> <p>FLARE Pendant FL2-12 - 2" Cylinder - 15" x 11" FL2-18 - 2" Cylinder - 26" x 18"</p> <p>CONVEX Pendant CX2-22 - 2" Cylinder - 10" x 22"</p> <p>PEAR Pendant PR2-22 - 2" Cylinder - 12" x 22"</p> <p>CURVILINEAR Pendant CL2-12 - 2" Cylinder - 11" x 11" CL2-18 - 2" Cylinder - 18" x 18"</p> <p>TEAR DROP Pendant TD2-22 - 2" Cylinder - 12" x 22"</p>

NOTES:

D. STYLE COLORS	E. CYLINDER FINISH	F. LUMEN OUTPUT	G. BAFFLE TYPE	H. BEAM OPTICS
<p>Standard</p> <p>BK Black (AC44) MB Marble (AC03) LG Lt Gray (AC10) CH Charcoal (AC12)</p> <p>See Color Guide Below</p>	<p>Specialty</p> <p>YL Yellow (AC51) OR Orange (AC 32) GR Green (AC46) BL Blue (AC07) NV Navy (AC42) RD Red (AC17) LT Light Tan (AC05) CM Caramel (AC02) SG Smoke Gray (AC47) WH White (AC04)</p>	<p>BK Black</p> <p>500 500 lm, 5W 750 750 lm, 8W 1000 1000 lm, 10W 1250 1250 lm, 12W 1500 1500 lm, 15W 1750 1750 lm, 18W 2000 2000 lm, 22W</p> <p>Lumen output is based on 3500K 80CRI refer to Light Loss Factor Table.</p>	<p>DSF Deep, Smooth DMF Deep, Milli-Groove</p>	<p>13 Narrow Spot 13° 20 Spot 20° 26 Narrow Flood 26° 35 Flood 35° 55 Wide Flood 55°</p>


I. BAFFLE FINISH	J. OPTIC ACCESSORIES	K. CRI & COLOR TEMP.	L. VOLTAGE	M. DRIVER
<p>WH White BK Black SS Satin Silver CG Champagne CC Custom Color</p> <p>White Black Satin Champagne Silver</p>	<p>NN None HL Hex Louver CL Clear Glass FG Frosted Glass SG Striped Glass XG Check Glass</p>	<p>835 80 CRI; 3500K 840 80 CRI; 4000K</p> <p>927 90 CRI; 2700K 930 90 CRI; 3000K 935 90 CRI; 3500K 940 90 CRI; 4000K</p>	<p>UNV 120-277v</p> <p>For 347V Consult Factory</p>	<p>S1 1% Dimming (0-10v) DD Dual Dimming (Phase Cut/0-10v 5% Dimming) SAX 1% Dim with Aux PEQ Lutron, Hi-Lume Premier EcoSystem 0.1% Fade to Black ELO EldoLED 0.1% Dim to Dark driver DALI DALI 2.0 Compatible</p> <p>1750 lm max for dual dim.</p>

SUSPENSION TYPE				OPTIONS		
N. CANOPY TYPE	O. CANOPY COLOR	P. POWER CORD	P. CORD LENGTH	Q. STEM	Q. STEM LENGTH	R. OPTIONS
FRC Flat Round Canopy PRC Power Round Canopy SRJ Surface Round J-Box Canopy PRS Power Round Surface J-Box Canopy	WH White BK Black SV Silver	WF White Feed BF Black Feed SF Silver Feed	24 24 in 42 42 in 102 102 in 150 150 in	OR WST White Stem BST Black Stem SST Silver Stem CST Custom Color RAL # required	12 12 in 18 18 in 24 24 in 48 48 in xx Custom length Specified in inches	NN NONE EB Emergency Battery (6-Watt) Remote Driver Only RD Remote Driver SLP Slope Ceiling AWN-R Lutron Athena Wireless Node (RF-only) in White AWN-B Lutron Athena Wireless Node (RF-only) in Black(RF-only)
FRC required if Remote Driver Selected.		Maximum Pendant height is 50" when cord hung, greater than 50" requires stem mount.				

BAFFLE/BEAM ANGLE/MAX LUMENS CROSS REFERENCE					
BAFFLE TYPE	13°	20°	26°	35°	55°
DSF	1250	2000	2000	2000	2000
DMF	1250	2000	2000	2000	2000

Note: Maximum Lumens based on 3500K 80CRI test values with no accessories. Beam angles change with certain accessories

STANDARD FINISHES



SPECIALTY FINISHES

