


Halcyon 4.0 Acoustic 4000 Lumens


PENDANT
Medium / Large

LUX ILLUMINAIRE

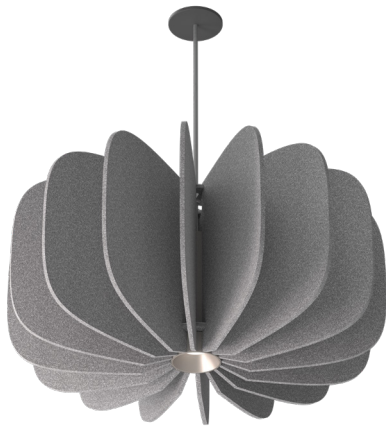

Tranquil Lighting—the Halcyon pendant seamlessly merges contemporary grace with a serene ambiance. Its acoustically designed exterior shape not only absorbs sound but also reduces reverberation. With an integrated 2” or 4” luminaire at its core, it emanates the perfect ambient light. Incorporating the Halcyon into spaces like lobbies, private offices, collaborative areas, or breakrooms adds a quintessential and functional touch. Choose from a diverse selection of sizes, shapes, and colors to match your preferences. This pendant family offers a lumen output range of 500 to 4000 lumens, ensuring abundant illumination for various needs.

70mm Beam Optics:



STYLE COLORS

STANDARD FINISHES




SPECIALTY FINISHES



BAFFLE FINISHES



ACCESSORIES

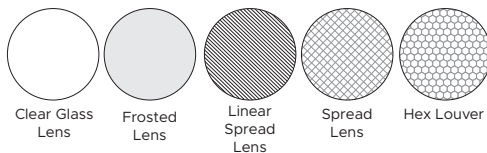

SPECIFICATIONS

Im/W	135
Lumen Output	500 - 4000lm
Optic Size	70mm
Beam Optics	15°, 18°, 24°, 27°, 35°, 38°, 55°
Baffle Type	Deep Smooth Finish (Depth 1 3/8")
	Deep Milli-Groove (Depth 1 3/8")
Baffle & Trim Finishes	White, Black, Satin Silver & Champagne
CRI -80 (2-Step)	35K & 40K
CRI - 90 (2-Step)	27K, 30K, 35K, 40K *90 CRI Option has an R9 Value Greater than 50
Accessories Options	Hex Louver, Frosted Lens, Linear Spread Lens, Spread Lens, Clear Lens
Accessories Qty	One
Drivers	0-10V, TRIAC, ELV, Lutron Ecosystem, DALI, (Optional Emergency Battery)
Dimming	1%, 5%, 0.1%
Voltage	120-277 Volt
Lumen Maintenance	80,000
Power Factor	> .95
THD	< 20kHz
Approved Location	Dry/Damp
Certifications	UL Listed



Suitable for Damp
Locations.




Halcyon 4.0 Acoustic 4000 Lumens

PENDANT
Medium / Large



Model Sequence

Ordering Guide

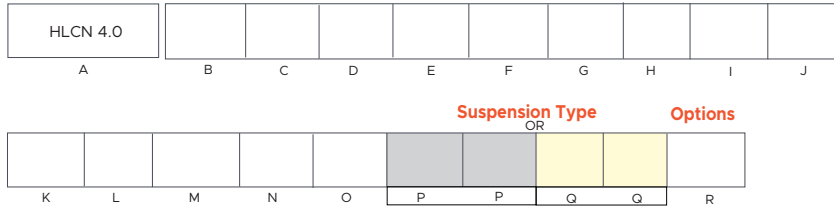

NOTES:



Suitable for damp locations.

PENDANT

A. MODEL	A. MODEL	A. MODEL	A. MODEL	B. DISTRIBUTION
HLCN 4.0	ROUND Pendant RD4-18 - 4" Cylinder - 19" x 18" RD4-24 - 4" Cylinder - 24" x 24"	DRUM Pendant DR4-18 - 4" Cylinder - 24" x 18" DR4-24 - 4" Cylinder - 42" x 24"	FLARE Pendant FL4-18 - 4" Cylinder - 27" x 18" FL4-24 - 4" Cylinder - 33" x 24"	D Direct
	TAPERED Pendant TP4-18 - 4" Cylinder - 20" x 18" TP4-24 - 4" Cylinder - 25" x 24"	MONOLITH Pendant MN4-18 - 4" Cylinder - 15" x 18" MN4-24 - 4" Cylinder - 18" x 24"	CONVEX Pendant CX4-33 - 4" Cylinder - 15" x 33"	
	ELLIPSOID Pendant EL4-18 - 4" Cylinder - 32" x 17" EL4-24 - 4" Cylinder - 48" x 24"	OVAL Pendant OV4-18 - 4" Cylinder - 36" x 18" OV4-24 - 4" Cylinder - 48" x 24"	PEAR Pendant PR4-33 - 4" Cylinder - 17" x 33"	
	APPLE Pendant AP4-18 - 4" Cylinder - 20" x 18" AP4-24 - 4" Cylinder - 24" x 24"	DOME Pendant DM4-18 - 4" Cylinder - 37" x 18" DM4-24 - 4" Cylinder - 47" x 24"	CURVILINEAR Pendant CL4-18 - 4" Cylinder - 19" x 18" CL4-24 - 4" Cylinder - 24" x 24"	
			TEAR DROP Pendant TD4-33 - 4" Cylinder - 17" x 33"	

D. STYLE COLORS	E. CYLINDER FINISH	F. LUMEN OUTPUT	G. BAFFLE TYPE	H. BEAM OPTICS
Standard BK Black (AC44) MB Marble (AC03) LG Lt Gray (AC10) CH Charcoal (AC12)	Specialty YL Yellow (AC51) OR Orange (AC32) GR Green (AC46) BL Blue (AC07) NV Navy (AC42) RD Red (AC17) LT Light Tan (AC05) CM Caramel (AC02) SG Smoke Gray (AC47) WH White (AC04)	BK Black 500 500 lm, 5W 750 750 lm, 8W 1000 1000 lm, 10W 1250 1250 lm, 12W 1500 1500 lm, 15W 1750 1750 lm, 18W 2000 2000 lm, 22W 2500 2500 lm, 26W 3000 3000 lm, 28W 3500 3500 lm, 34W 4000 4000 lm, 42W	DSF Deep, Smooth DMF Deep, Milli-Groove	15 Narrow Spot 15° 18 Spot 18° 24 Narrow Flood 24° 27 Narrow Flood 27° 35 Flood 35° 38 Flood 38° 55 Wide Flood 55°
See Color Guide Below		Lumen output is based on 3500K 80CRI refer to Light Loss Factor Table.		

I. BAFFLE FINISH	J. OPTIC ACCESSORIES	K. CRI & COLOR TEMP.	L. VOLTAGE	M. DRIVER
WH White BK Black SS Satin Silver CG Champagne CC Custom Color RAL # required	NN None HL Hex Louver CL Clear Glass FG Frosted Glass SG Striped Glass XG Check Glass	835 80 CRI; 3500K 840 80 CRI; 4000K 927 90 CRI; 2700K 930 90 CRI; 3000K 935 90 CRI; 3500K 940 90 CRI; 4000K	UNV 120-277v	S1 1% Dimming (0-10v) DD Dual Dimming (Phase Cut/0-10v5% Dimming) SAX 1% Dim with Aux PEQ Lutron, Hi-Lume Premier EcoSystem 0.1% Fade to Black EldoLED 0.1% Dim to Dark driver DALI DALI 2.0 Compatible
		*90 CRI Option has an R9 Value Greater than 50	For 347V Consult Factory	1750 lm max for dual dim.

N. CANOPY TYPE	O. CANOPY COLOR	P. POWER CORD	P. CORD LENGTH	OR	Q. STEM	Q. STEM LENGTH	R. OPTIONS
FRC Flat Round Canopy PRC Power Round Canopy SRJ Surface Round J-Box Canopy PRS Power Round Surface J-Box Canopy	WH White BK Black SV Silver	WF White Feed BF Black Feed SF Silver Feed	24 24 in 42 42 in 102 102 in 150 150 in		WST White Stem BST Black Stem SST Silver Stem CST Custom Color RAL # required	12 12 in 18 18 in 24 24 in 48 48 in xx Custom length Specified in inches	NN NONE EB Emergency Battery (6-Watt) Remote Driver Only Remote Driver RD Slope Ceiling SLP AWNR-W Lutron Athena Wireless Node (RF-only) in White AWNR-B Lutron Athena Wireless Node (RF-only) in Black(RF-only)
FRC required if Remote Driver Selected.			Maximum Pendant height is 50" when cord hung, greater than 50" requires stem mount.				

BAFFLE/BEAM ANGLE/ MAX LUMENS CROSS REFERENCE							
BAFFLE TYPE	Performance 70mm Optic						
	15°	18°	24°	27°	35°	38°	55°
DSF	1500	2500	4000	4000	2500	4000	4000
DMF	1500	2500	4000	4000	2500	4000	4000

STANDARD FINISHES

- BLACK BK AC44
- MARBLE MB AC03
- LT. GRAY LG AC10
- CHARCOAL CH AC12

SPECIALTY FINISHES

- YELLOW YL AC51
- ORANGE OR AC32
- GREEN GR AC46
- BLUE BL AC07
- NAVY NV AC42
- RED RD AC17
- LT.TAN LT AC05
- CARAMEL CM AC02
- SMOKE GRAY SG AC47
- WHITE WH AC04