




Family: Park Ridge | Item No. 1340 MB



**Drawing 1 - Strap Detail**

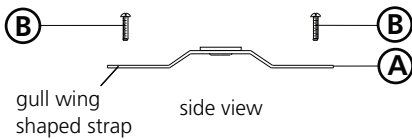

**Drawing 2 - Fixture Mounting**

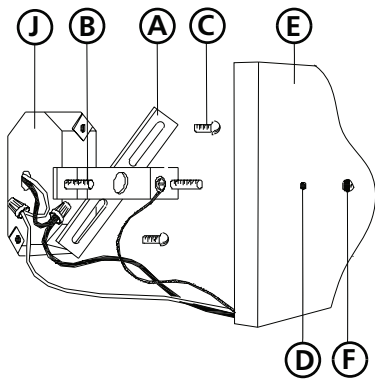

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, and then mounting the fixture to the wall.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Prepare gem strap **(A)** for mounting, by threading the two screws **(B)** provided into the back of the gull wing bracket on gem strap **(A)** - see **Drawing 1**.
  - Holes into which the screws are threaded, should match the spacing of the mounting holes **(D)**, in the back plate **(E)** - see **Drawings 1 and 2**.
2. Mount gem strap **(A)** to junction box **(J)** using two 1" long screws provided.

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Mount the fixture by slipping the holes **(D)** in the back plate **(E)** over the screws **(B)** in the mounting strap **(A)** - see **Drawing 2**.
2. Hold fixture against wall and thread ball knobs **(F)** onto end of screw **(B)** showing through the backplate **(E)**.
3. Fixture can now be lamped accordingly.

Note: Maximum wattage for 1340 fixture is 60 watts per bulb.

2.7.08