

Wall Square ARCH


PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS IK10 IP66



LED Chip	Cree CXA 1830 field replaceable LED board
Luminaire Output	3000 Lumens @ 700mA (26 watts), delivered from the Luminaire with unobstructed beam
Lumens Per Watt	100 Lumens minimum @ 26 watts, delivered from Luminaire with unobstructed beam
CRI (3000K)	80+ Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	Type 2, Type 4 asymmetric, 95°
Ingress Protection	IP66


Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 1598 CE

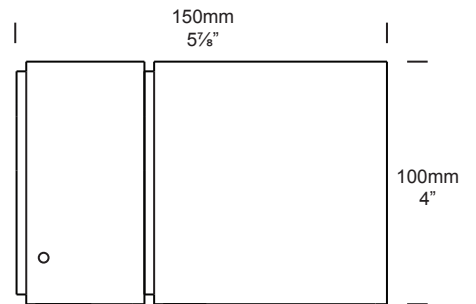

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. W/ARCSQ

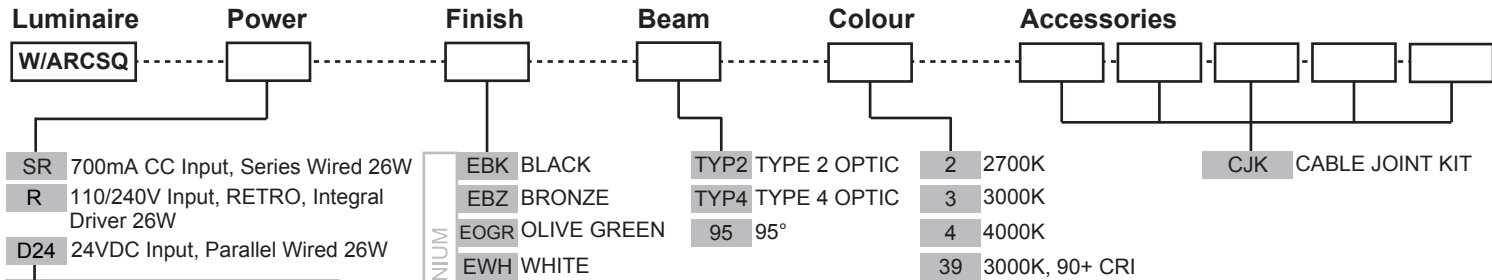

SERIES REMOTE:
Constant current driver (included) individual fixtures require 37vdc @ 700mA maximum (non dimming). Dimming option available (0-10 volt).

RETRO 110-277vac DRIVER:
Constant current driver (included). Input: 120, 240, 277 volts Output: 26 watts total 37vdc @ 700mA (non dimming). Dimming option available (0-10 volt).

24VDC DRIVER:
Input: 24vdc. Output: 36vdc @ 700mA constant current (non dimming).
Note: not for USA.

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Head: 115mm (4½") high corrosion resistant solid aluminium rod with chromate substrate, epoxy layer and high UV resistant polyester powder coat.

Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Cable:

Water resistant rubber.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lens:

Extra clear optical silicone TIR.

Mounting:

??

Luminaire Weight:


6kg (13lb 4oz) - head only

ACCESSORIES


BEAM ANGLES

High efficiency Reflectors. Field replaceable


IES files available for download: <http://www.hunzalighting.com/download.php>

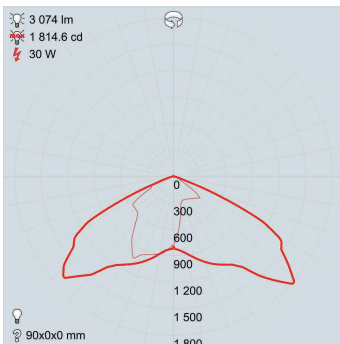

TYPE 2
OPTIC

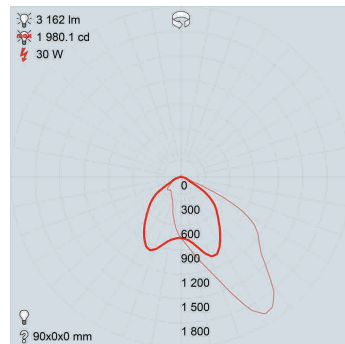


TYPE 4
OPTIC



95°
OPTIC

WIRING GUIDE

Available for download: www.hunzalighting.com/download.php

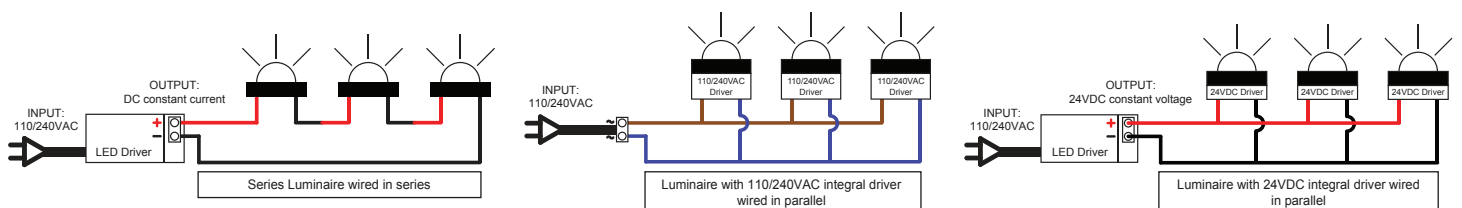

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY 130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.