

## **Euro Spot**

# PURELED SPECIFICATIONS ( C UL) US


LED Chip	Cree XHP-50-2 Plug and Play field replaceable LED board
Luminaire Output	420 Lumens @ 700mA (4 watts), 240 Lumens @ 350mA (2 watts), delivered from luminaire with unobstructed beam.
Lumens Per Watt	105 Lumens minimum @ 4 watts, delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	15, 25, 38, 60
Ingress Protection	IP66

Warranty	Electronics = 5 years Body Cop/ SS = 10 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No. 250.7, No. 250.0-08 CE



### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

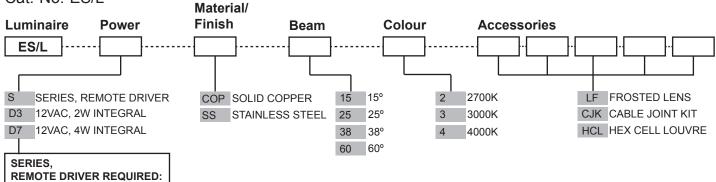

Click here for halogen specification sheet

Constant current driver Individual fixtures require 6vdc @ 700mA maximum

Cat. No. ES/L

#### **12VAC INTEGRAL DRIVER:**

Hunza integrated Plug and Play Driver (included) Input: 9-15VAC

Output: 6vdc @ D3=350mA, D7=700mA

#### OTHER LAMP OPTIONS:

ES/H - MR11 Halogen 12V Lamp

ES/M11L - MR11 LED Retrofit 12V Lamp (lamps vary by market - please refer to supplier for details)

Click here for Remote Power Supply Guidance Charts

Specifications may change without notice. This document contains proprietary inform of Hunza. Its receipt or possession does not convey an rights to reproduce or disclose

#### **LUMINAIRE CONSTRUCTION**

CNC machined from one of the following

Copper:

Body: 45.5mm (1<sup>3/4</sup>") copper rod. "U" Bracket: 12mm x 3mm (1/2" x 1/8") copper

har

316 Stainless Steel

Body: 45.5mm (1<sup>3/4</sup>") stainless steel rod. "U" Bracket: 12mm x 3mm (1/2" x 1/8") 316 stainless steel bar.

Lens:

6mm (1/4") extra clear low iron flush fit shatter resistant glass. Lifetime Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

#### Mounting:

Via a "U" bracket that is screwed into the mounting surface.

**Luminaire Weight:** 

Cop: 0.550kg (1lb 3oz) SS: 0.500kg (1lb 2oz)

#### **ACCESSORIES**




Hex Cell Louvre


#### **BEAM ANGLES**

High efficiency PMMA TIR lenses. Field replaceable


IES files available for download: hunzalighting.com/downloads

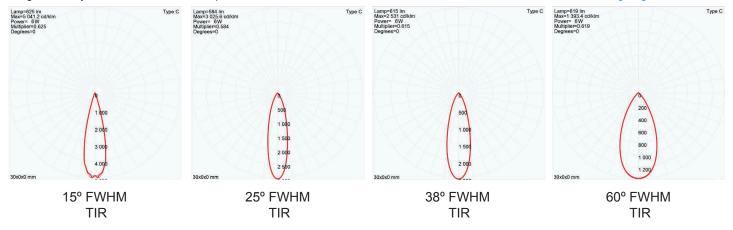

#### **WIRING GUIDE**



Diagrams are a guide only, wire colours and polarity may change depending on fixture and country



Specifications may change without notification

INTERNATIONAL CONTACTS:

Aug 2017