


Pond Lite High Power RGBW Pond Lite HP Weighted Base RGBW PURE LED

SPECIFICATIONS




LED Chip	LED Engin LZP RGBW field replaceable LED board
Luminaire Output	1400 total Lumens @ 350mA (26 watts) with all colours on, Delivered from Luminaire with unobstructed beam.
Lumens Per Watt	54 Lumens minimum @ 26 watts, Delivered from Luminaire with unobstructed beam
CRI (6500K)	RGBW (White 75)
Colour Temperatures	RGBW (White CCT 6500)
Beam Angles	15, 30, 40, 70
Ingress Protection	IP68
Warranty	Electronics = 5 years Body SS = 10 years Body Aluminium = 5 years
Standards	AS/NZS 61046

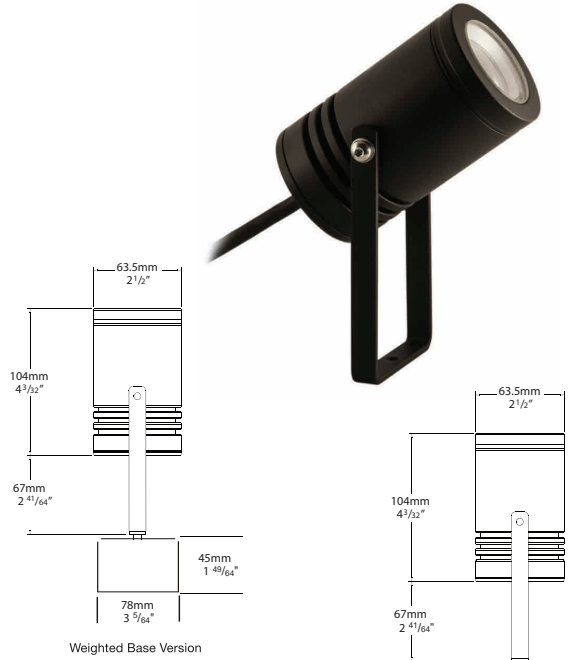

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. POND/HPRGBW or POND/W/HPRGBW

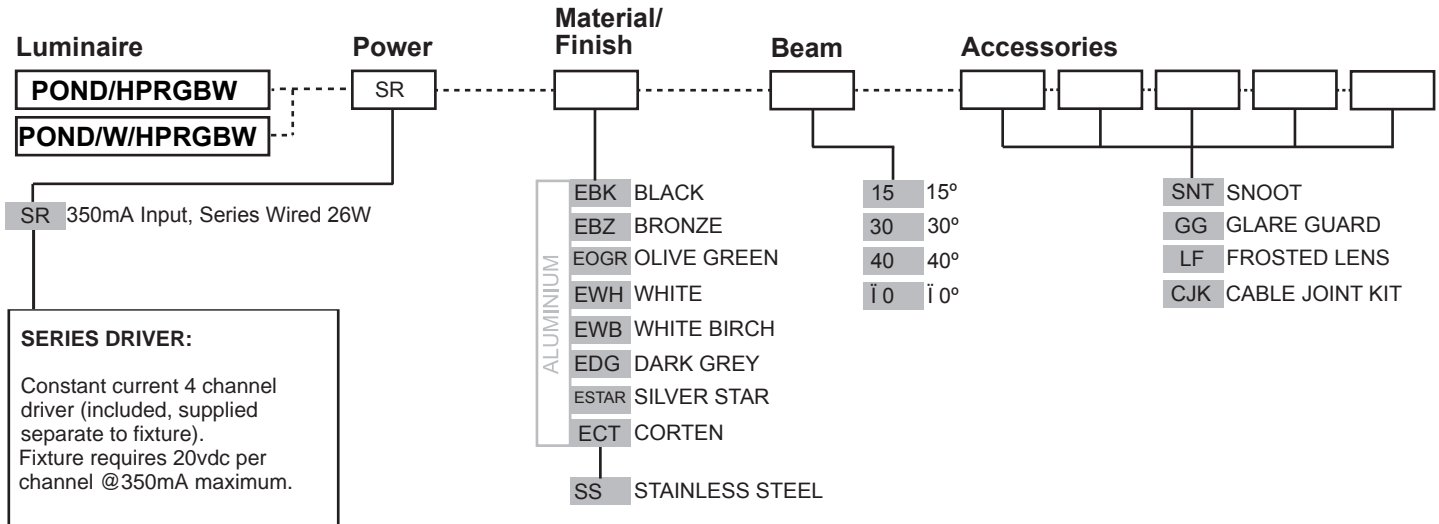

MUST BE USED IN A SUBMERGED LOCATION.
NOT SUITABLE FOR USE IN OPEN AIR ENVIRONMENTS.

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:
Aluminium:
 Body: high corrosion resistant 63.5mm (2^{1/2}") x 10mm (3/8") aluminium.
 End cap: solid aluminium 63.5mm (2^{1/2}") rod, and high UV resistant polyester powder coat.
 Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

USA/Canada
 Aluminium is not approved.

316 Stainless Steel:
 Body: 63.5mm (2^{1/2}") x 10mm (3/8").
 End cap: solid 316 stainless steel 63.5 (2^{1/2}").

Lens:
 10mm (3/8") extra clear, low iron, shatter resistant glass.
 Lifetime warranty


Gaskets:
 Silicone, iron impregnated 220°C (428°F)

Mounting:
 Via a "U" bracket that is screwed to the mounting surface. If being used in a pond with a plastic liner then the weighted version should be used. No screws are required for fixing, therefore no leaks.

Cable:
 Standard 3 meters
 Water resistant rubber

Luminaire Weight:
 Bracket Version
 Alum: 0.740kg (1lb 10oz)
 SS: 1.300kg (2lb 14oz)
 Weighted Version
 Alum: 1.165kg (3lb 10oz)
 SS: 1.880kg (4lb 2oz)


ACCESSORIES

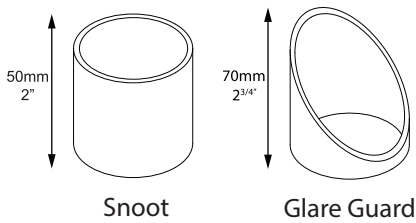

BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: hunzalighting.com/downloads

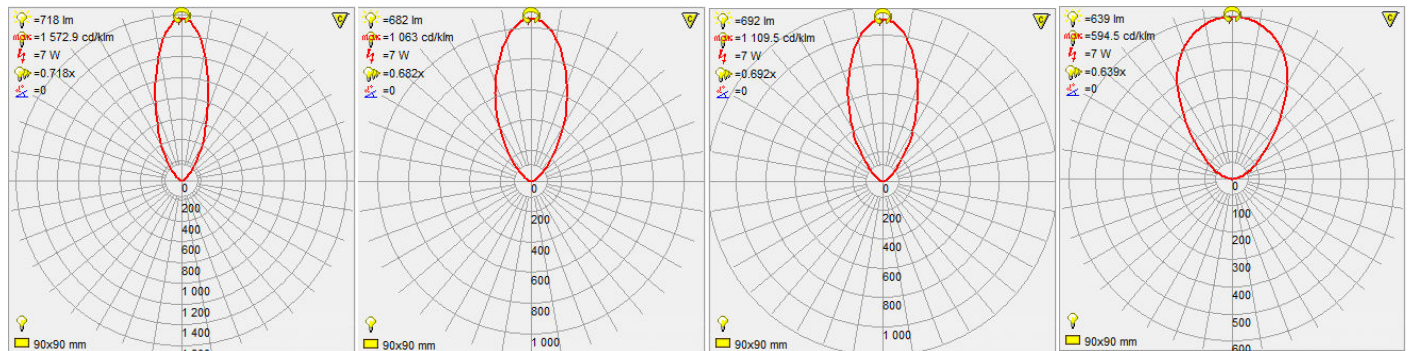

15° FWHM TIR

30° FWHM TIR



40° FWHM TIR

70° FWHM TIR

WIRING GUIDE

Available for download: hunzalighting.com/downloads

CONSTANT CURRENT - SERIES WIRED

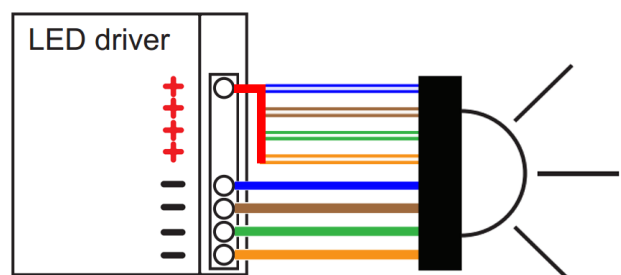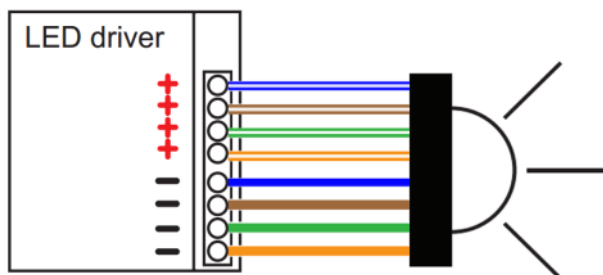

Specifications may change without notification

Sept 2020