

LaYR 2.0 SQUARE FIXED DOWNLIGHTS

DESIGNER & PERFORMANCE Series (Up to 2000 Lumens)



Image Above Shown With Designer Deep Smooth Black Baffle and Black Trim Ring

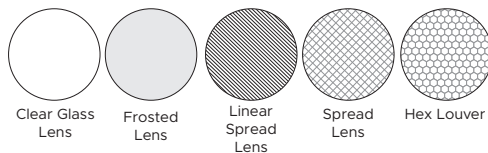


Image Above Shown With Performance Deep Smooth Black Baffle and Black Trim Ring

TRIM & BAFFLE FINISHES



ACCESSORIES




The LaYR 2.0 Square Fixed Performance and Designer downlight is a versatile lighting solution that can adapt to different lighting needs and style preferences. Its design includes a 2" aperture with square baffle, offering users 5 distinct optic options to adjust the beam spread. With a lumen output range of 500 to 2000 lumens, it can provide sufficient illumination for various purposes, such as accent lighting or general illumination.

To add to its adaptability, the downlight can be further customized by choosing from a range of baffle and trim finishes, drivers, housings, and accessories. This customization allows users to create a unique downlight that fits their specific requirements and style preferences.



50mm Beam Optics:



SPECIFICATIONS

	Designer Series	Performance Series
lm/W	127	127
Lumen Output	500 - 2000lm	500 - 2000lm
Luminaire Height	4 15/16"	4 15/16"
Optic Size	50mm	50mm
Aperture @ Optic	Square	Round
Beam Optics	13°, 20°, 26°, 35°, 55°	13°, 20°, 26°, 35°, 55°
Baffle Type	Deep Smooth Finish (Depth 1") Cut Off Angle - 26° Shielding Angle - 52°	Deep Smooth Finish (Depth 1") Cut Off Angle - 24° Shielding Angle - 60°
Trim Type	Flange Trim, Trimless	Flange Trim, Trimless
Baffle & Trim Finishes	White, Black, Satin Silver & Champagne	White, Black, Satin Silver & Champagne
CRI - 80 (2-Step)	35K & 40K	35K & 40K
CRI - 90 (2-Step)	27K, 30K, 35K, 40Kc *90 CRI Option has an R9 Value Greater than 50	27K, 30K, 35K, 40K *90 CRI Option has an R9 Value Greater than 50
Ceiling Thickness Range	(min) 3/8" - (max) 1 1/2"	(min) 3/8" - (max) 1 1/2"
Hole Cut Size	3 3/8" (REM) - 3 1/2" (OF/IC)	3 3/8" (REM) - 3 1/2" (OF/IC)
Accessories Options	Hex Louver, Frosted Lens, Linear Spread Lens, Spread Lens, Clear Lens	Hex Louver, Frosted Lens, Linear Spread Lens, Spread Lens, Clear Lens
Accessories Qty	Up to 2	Up to 2
Drivers	0-10V, TRIAC, ELV, Lutron Ecosystem, DALI	0-10V, TRIAC, ELV, Lutron Ecosystem, DALI
Dimming	1%, 5%, 0.1%	1%, 5%, 0.1%
Voltage	120-277 Volt	120-277 Volt
Housing	Non-IC, IC Rated, Remodel	Non-IC, IC Rated, Remodel
Lumen Maintenance	80,000	80,000
Power Factor	> .95	> .95
THD	< 20kHz	< 20kHz
Approved Location	Dry/Damp	Dry/Damp
Certifications	UL 1598/UL 2108 Listed US and Canada	UL 1598/UL 2108 Listed US and Canada

Specifications may change without notice.

LaYR 2.0 SQUARE FIXED DOWNLIGHTS

DESIGNER & PERFORMANCE Series (Up to 2000 Lumens)



Ordering Guide

HOUSING



LIGHT ENGINE & BAFFLE



OPTIONS

NOTES:



Suitable for Damp locations.



HOUSING & DRIVER

A. MODEL	B. TRIM	C. HOUSING STYLE	D. MOUNTING	E. LUMEN OUTPUT
LFXQ2 Square Fixed 2in	FT Flange Trim SF Spackle Flange Trimless	OF Open Frame (Non-IC) (Rough-In Mounting Plate) w/ 5/8" Collar IC IC Rated Housing w/ 5/8" Collar RM Remodel (Non-IC)	SMB Standard Mounting Bars Min: 14.25" / Max: 26" ACB Adjustable Commercial Bar Hanger (Includes C-Channel Bracket and Heavy Duty Bar Hangers) Min: 11" / Max: 26.75" REM Remodel	500 500 lm, 5W 750 750 lm, 8W 1000 1000 lm, 10W 1250 1250 lm, 12W 1500 1500 lm, 15W 1750 1750 lm, 18W 2000 2000 lm, 22W
		Additional ceiling collar depths available in (H) Options below OF and RM Non-IC rated cannot come in contact with insulation.	ACB must be selected at initial order	Narrow spot max is 1500 lm based on Baffle choice see cross reference below 1750 lm max for dual dim. Please see driver matrix for additional details

F. VOLTAGE	G. DRIVER	H. HOUSING OPTIONS (May choose multiple options below)
UNV 120-277v	S1 1% Dimming (0-10v) DD Dual Dimming (Phase Cut/0-10v5%Dimming) SAX 1% Dim with Aux PEQ Lutron, Hi-Lume Premier EcoSystem 0.1% Fade to Black ELO EldoLED 0.1% Dim to Dark driver DALI DALI 2.0 Compatible	NN NONE RD Remote Driver (Consult Factory) C1 1" Ceiling Depth Collar C5 1.5" Ceiling Depth Collar AWNRLutron Athena Wireless Node (RF- only)
	SAX Driver Code is required for the Athena Wireless Node 1750 lm max for dual dim.	AWNRL Requires SAX Driver Code

LIGHT ENGINE & BAFFLE

I. LIGHT ENGINE	J. BAFFLE TYPE	K. BEAM OPTICS	BAFFLE/BEAM ANGLE/ MAX LUMENS CROSS REFERENCE
FDQ2 Fixed Designer Square 2in Square/Square	Flange Trim QQF Deep, Smooth Flanged Spackle Flange Trimless QQS Deep, Smooth Spackle	50mm Optic Square 13 Narrow Spot 13° 20 Spot 20° 26 Narrow Flood 26° 35 Flood 35° 55 Wide Flood 55°	Designer Square/Square 50mm Optic BAFFLE TYPE 13° 20° 26° 35° 55° QQF 1250 2000 2000 2000 2000 QQS 1250 2000 2000 2000 2000
	FPQ2 Fixed Performance Square 2in Square/Round	Flange Trim QRF Deep, Smooth Flanged Spackle Flange Trimless QRS Deep, Smooth Spackle	50mm Optic Round 13 Narrow Spot 13° 20 Spot 20° 26 Narrow Flood 26° 35 Flood 35° 55 Wide Flood 55°
			Refer to Beam/Max Lumens cross reference Note: Maximum Lumens based on 3500K 80CRI test values with no accessories. Beam angles do change with certain accessories

L. BAFFLE FINISH	M. TRIM FINISH	N. CRI COLOR TEMP.	O. ACCESSORIES	P. FACTORY OPTIONS
WH White BK Black SS Satin Silver CG Champagne CC Custom Color	WH White BK Black SS Satin Silver CG Champagne CC Custom Color NN None (Required with spackle flange Only)	835 80 CRI; 3500K 840 80 CRI; 4000K 927 90 CRI; 2700K 930 90 CRI; 3000K 935 90 CRI; 3500K 940 90 CRI; 4000K	HL Hex Louver CL Clear Glass FG Frosted Glass SG Striped Glass (Linear Spread) XG Check Glass (Spread)	SSC Seismic Safety Cable
	White Black Satin Silver Champagne	*90 CRI Option has an R9 Value Greater than 50		
	NN: Spackle Flange Trimless	All CCT are 2 Step MacAdam Ellipse	Other accessories may be available, consult factory.	