LED

Pure, polished, precision...

The ultimate family of cylinders for all your layers of light

You told us you needed beautiful lighting with a high level of fit, finish and flexibility to overcome the challenges posed by exposed ceilings in retail and hospitality environments. You asked for a complete multi-mount family with easy installation for compressed timelines in office and hotel spaces.

You wanted choice including direct/indirect, downlight, wall wash and adjustable accent combined with a myriad of mounting choices that include solid or cable pendant, wall mount, ceiling mount, dual cable mount and stem mount. Lightolier listened, and we are stoked to bring you Calculite precision cylinders... everything you asked for and more.

Designed with designers in mind

• The largest array of cylinder options in the US market.

• Available in RAL colors or white, aluminum, and black finishes.

• Complementary design and finish to OmniSpot track family.

• Line expansion provides simplest choice to specify projects.

• Full line of downlights, wall wash, and accents.

• Wide distribution allows for greater spacing.

• Expands on 2SDCM color consistency between Calculite and OmniSpot families.

C2C   Calculite

2" Cylinder (round aperture)

Cable
Stem
Cable
Stem

Features

Lumens: up to 1000
CRI: 90 (min)
CCT: 2700K–4000K & D2W options
Lifetime: 50,000 hrs (L70)
Warranty: 5 year

Adjustable Accent
Surface mount

Downlight & Wall Wash
Surface mount

**Up/Down
Downlight & Wall Wash**
Wall mount

Downlight & Wall Wash
Wall mount

Downlight & Wall Wash
Pendant mount

Adjustable Accent
Pendant mount
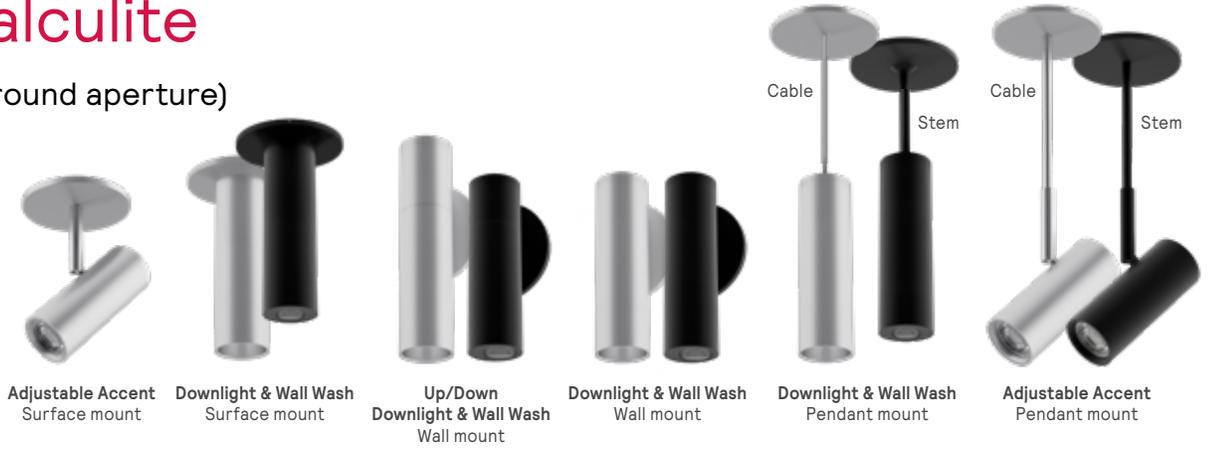
Fixture

example: C2CPSA10940Z10UA

Series	Mounting		Style		Lumens		CRI/CCT		Dimming/Voltage		Finish	
C2C	**PCS**	Pendant w/Cable 6' power/cord	**DL**	Downlight[2]	**08**	780lm	**9D2W**	90CRI/3000K-1800K	**Z10U**	0-10V 1% / Unv (120/277V)	**A**	Aluminum
C2C Calculite 2" Cylinder	**PCM**	Pendant w/Cable 12' power/cord			**06** **10**	700lm 1000lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K	**ELV1** **L01U** **L1U**	ELV (120V) / Unv (120/277V) Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)	**B** **W** **RAL**	Black (matte) White (matte) RAL Color[4]
	PCL	Pendant w/Cable 20' power/cord										
	PS **S**	Pendant w/Stem[1] Surface	**A**	Adjustable Accent[3]	**06** **10**	700lm 1000lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K	**Z10U** **ELV1** **L01U** **L1U**	0-10V 1% / Unv (120/277V) ELV (120V) / Unv (120/277V) Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)	**A** **B** **W** **RAL**	Aluminum Black (matte) White (matte) RAL Color[4]
	PS **S** **W**	Pendant w/Stem[1] Surface Wall	**DL**	Downlight[2]	**08**	780lm	**9D2W**	90CRI/3000K-1800K	**Z10U** **ELV1** **L01U** **L1U**	0-10V 1% / Unv (120/277V) ELV (120V) / Unv (120/277V) Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)	**A** **B** **W** **RAL**	Aluminum Black (matte) White (matte) RAL Color[4]
			DL **WW**	Downlight[2] Wall Wash	**06** **10**	700lm 1000lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K				
	W	Wall	**UDW**	Up/Down Wall Wash	**06**	700lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K	**Z10U** **ELV1** **L01U** **L1U**	0-10V 1% / Unv (120/277V) ELV (120V) / Unv (120/277V) Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)	**A** **B** **W** **RAL**	Aluminum Black (matte) White (matte) RAL Color[4]
					08	800lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K	**L01U** **L1U**	Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)		
					10	1000lm			**Z10U** **ELV1**	0-10V 1% / Unv (120/277V) ELV (120V) / Unv (120/277V)		
	W	Wall	**UD**	Direct/ Indirect[4]	**06**	700lm	**927** **930** **935** **940**	90CRI/2700K 90CRI/3000K 90CRI/3500K 90CRI/4000K	**L01U** **L1U**	Lutron PEQ EcoSystem 0.1% / Unv (120/277V) Lutron PEQ EcoSystem 1% / Unv (120/277V)	**A** **B** **W** **RAL**	Aluminum Black (matte) White (matte) RAL Color[4]
					08	750lm			**Z10U** **ELV1**	0-10V 1% / Unv (120/277V) ELV (120V) / Unv (120/277V)		

1. Pendant Stem (PS) mountings need to be ordered with an Accessory for pendants.
2. Downlight (DL) styles need to be ordered with one Reflector.
   Wall Mount Direct/Indirect (WUD) styles need to be ordered with two Reflectors.
3. Adjustable Accent (A) styles need to be ordered with Optics.
4. RAL standard colors can be specified upon request.
   Add RAL standard code to (RALxxxxx).

Note: Please reference C2C specification sheet for more information on Reflectors, Optics and Accessories.

UL LISTED c US

ENERGY STAR

signify