




# High Bay Position Guide

*Linear & Round High Bay  
Fixtures for EVERY Application*

- Energy efficient, easy contractor-friendly lighting solutions
- Lightweight designs allow for minimal installation effort
- Form factor and lumen packages for every opportunity

IHB2 IHB4




RHB




AUL



AHB2



AHB4




MHB1



MHB2




MHB3




ALI2



ALI4



IHB  
30L



RHB  
30L



AUL  
30L







AHB  
60L




MHB  
90L



ALI  
100L

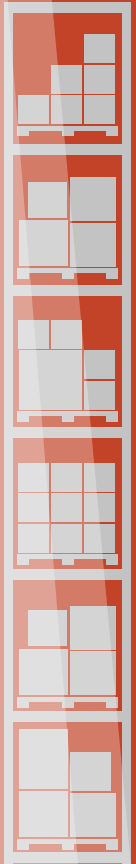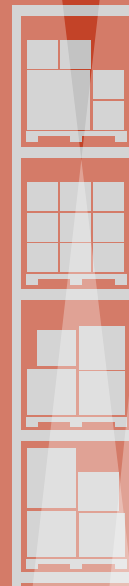

# High Bay Position Guide

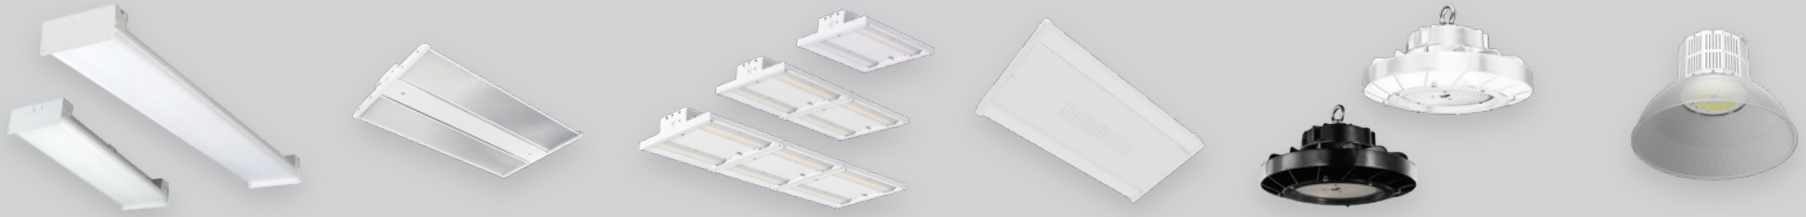

	Industrial Linear High Bay (IHB)	Advantage High Bay LED (AHB)	Modular High Bay Light (MHB)	Alliance High Bay (ALI)	Round High Bay LED (RHB)	Aureus LED Round High Bay (AUL)
	★★★	★★★	★★★★	★★★★★	★★★	★★★★★
Applications	Warehouse, Manufacturing, Service Bays, Retail	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums,
Colors Available	White	White	White	White	White, Black	White, Black, Silver, Custom
Sizes Available	2', 4'	2', 4'	1', 2', 3' length	2', 4'	13.5" Diameter	15" Diameter
Mounting Height	Up to 40'	Up to 60'	Up to 60'	Up to 90'	Up to 40'	Up to 40'
Delivered Lumens	9,000 to 30,000	18,000 to 60,000	12,000L - 90,000L	12,000 to 100,000	18,000 to 30,000	6,000 to 30,000
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	3000K, 3500K, 4000K, 5000K
LPW	Up to 154 LPW	Up to 138 LPW	Up to 162 LPW	Up to 172 LPW	Up to 133 LPW	Up to 162 LPW
Temperature Rating	Up to 55C	Up to 50C	Up to 50C	Up to 60C	50C	50C
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Wet Location, IP65	Damp Location
DLC <sup>1</sup>	Premium	Premium	Standard	Premium	Premium	Premium
Optics Options	No Lens, Acrylic (Diffuse)	Acrylic (Frosted)	Polycarbonate (Clear, Diffuse)	No Lens, Acrylic (Clear, Diffuse)	Open w/Reflector (16" or 22")	Open w/Reflector (16" or 22")
Distributions	Wide (120)	Wide (120)	Wide (120), Narrow (30)	Wide (120), Narrow (30)	General	General
Voltage Range	120V - 480V	120V - 277V	120V - 480V	120V - 480V	120V - 480V	120V - 480V
Battery Backup	Yes	Yes	Yes	Yes	Yes	Yes
Controls/Sensors	External PIR Motion Sensor External PIR Motion Sensor Bluetooth	External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	AirLink Synapse Indoor External PIR Motion Sensor Integral/External PIR Motion Sensor Bluetooth	External PIR Motion Sensor	AirLink Synapse Indoor Integral PIR Motion Sensor Bluetooth
Pricing	\$	\$	\$\$	\$\$\$	\$\$	\$\$\$

<sup>1</sup> Not all versions of this product may be qualified. Please check the DLC Qualified Products List at [www.designlights.org/OPL](http://www.designlights.org/OPL) to confirm which versions are qualified.