



Catalog #: \_\_\_\_\_ Project: \_\_\_\_\_

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_

# EX

## Thermoplastic Exit Sign



### FEATURES & SPECIFICATIONS

#### Construction

- Injection-molded UL 94 5VA flame retardant, high temperature, thermoplastic housing
- All configurations include field-selectable directional chevrons
- Universal design includes two faceplates, one backplate, and mounting canopy
- Standard finish: White and Black
- Buy American Act (BAA) compliant with US option

#### Optical System

- Illuminated by long-life, high intensity red or green LEDs
- Fully-illuminated 6" characters with 3/4" stroke

#### Electrical

- Standard Universal Voltage - 120/277VAC dual primary at 60Hz
- Solid-state transfer detects loss of line voltage and automatically switches to emergency mode
- Low voltage disconnect eliminates deep discharge
- Test button to provide manual verification of the transfer circuit and emergency lamps
- R6 option compatible with up to four SRL remote lamp heads

#### Battery

- Maintenance free NiCad Battery (WB only)
- Operating Temperatures 0°C to 40°C (32°F to 104°F)

#### Installation

- Includes mounting canopy for wall, ceiling, and end mount applications
- Universal J-box mounting pattern

#### Warranty

- 5 year warranty on all electronics and housing
- Separate 5 year pro-rated warranty on the battery

#### Listings

- UL 924
- NFPA 101
- NEC
- Damp Location Rated
- UL Listed 90 minute emergency run time, 24 hour recharge time

### ORDERING GUIDE

TYPICAL ORDER EXAMPLE: **EX R U WB WH SD2**


Prefix	Letter Color	# of Faces	Battery	Housing Color	Options
EX- Thermoplastic Exit Sign	R- Red G - Green	U - Universal (includes two face plates, back plate, and mounting canopy)	LB - Less Battery (AC Only) WB - With Battery	WH - White BK - Black	SD2 <sup>1</sup> - Self Test / Self Diagnostic R6 <sup>2</sup> - 6Watts Remote Capacity 2C <sup>3</sup> - 2 Circuit Input SF <sup>4</sup> - Special Sign Face PK1 - 1' Pendant Kit PK2 - 2' Pendant Kit PE12 - 12" Pendant Extension US - Meets Buy American Requirements (BAA) WGB1 - Wire Guard Back Mount WGE2 - Wire Guard End Mount WGC3 - Wire Guard Ceiling Mount PGB1 - Polycarbonate Guard Back Mount

#### FOOTNOTES:

- 1 - SD2 not available with LB option.  
2 - R6 option with power up to (4) SRL remote heads.

- 3 - 2C1 not available with remote capable units.  
4 - Not compatible with remote capable option.

### PRODUCT DIMENSIONS

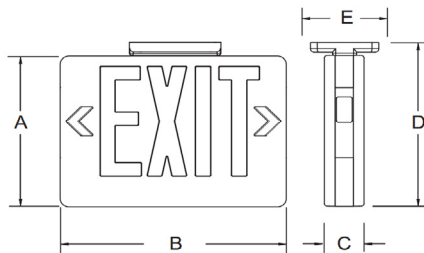

	A	B	C	D	E
EX	7.5"	12.75"	1.75"	8.5"	4.8"
EX - R6	8"	12"	2"	9"	4.8"

