



Strip Lighting Position Guide

LED Industrial Linear Fixtures

- Energy efficient, easy contractor-friendly lighting solutions



END VIEW



AST 4' and 8'
UP TO 8,000L

S 2', 4' and 8'
UP TO 18,000L

SDL 2', 4' and 8'
UP TO 18,000L

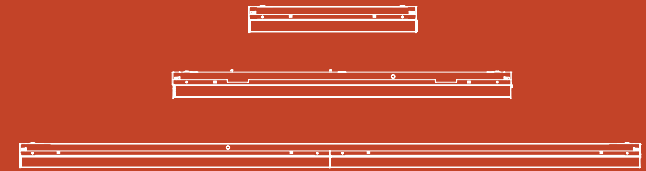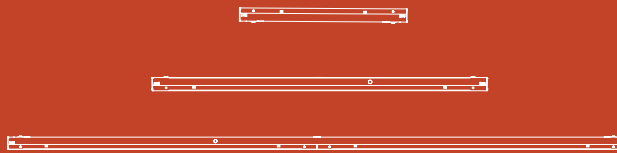

INDIVIDUAL

INDIVIDUAL OR CONTINUOUS

INDIVIDUAL OR CONTINUOUS



STORAGE

INDUSTRIAL AREA

SHOP FLOOR

STORAGE





INDUSTRIAL AREA

SHOP FLOOR / AUTO SERVICE AREA

STORAGE / HOSPITALITY

RETAIL / AUTO SERVICE AREA

SHOP FLOOR



Strip Lighting Position Guide



| | Advantage Series LED Strip Fixture (AST) ★★★★ | Indoor Industrial LED Strip Light (S) ★★★★ | Diffused Lens Strip (SDL) ★★★★★ |
|----------------------------|---------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Applications | Warehouse, Manufacturing, Service Bays, Retail, Utility and Storage Areas | Warehouse, Manufacturing, Service Bays, Retail, Utility and Storage Areas | Warehouse, Manufacturing, Service Bays, Retail, Utility and Storage Areas |
| Sizes Available | 4' and 8' | 2', 4', and 8' | 2', 4', and 8' |
| Luminaire Width | 4 3/8" | 4 3/8" | 3 3/8" |
| Mounting Height | Up to 12' | Up to 20' | Up to 20' |
| Mounting | Surface, Chain/Cable (sold separately) | Surface, Chain/Cable/Pendant (sold separately) | Surface, Chain/Cable/Pendant (sold separately) |
| Delivered Lumens | 4,000L - 8,000L | 1,500L - 18,000L | 1,500L - 18,000L |
| CCT | 3500K, 4000K, 5000K | 3000K, 3500K, 4000K, 5000K | 3000K, 3500K, 4000K, 5000K |
| Wattage | 20 - 65 | 12 - 142 | 12 - 142 |
| LPW | Up to 133 LPW | Up to 159 LPW | Up to 147 LPW |
| Temperature Rating | Up to 50C | Up to 50C | Up to 50C |
| Listings | Damp Location | Damp Location | Damp Location |
| DLC ¹ | Premium | Premium | Premium |
| Lens | Diffuse Rounded | No Lens | Diffuse Rounded |
| Voltage Range | 120V - 277V | 120V - 480V | 120V - 480V |
| Battery Backup | Yes | Yes | Yes |
| Retrofit Kits ² | No | Yes | Yes |
| Controls/Sensors | No | External PIR Motion Sensor (OMSx) AirLink Blue Controller (ALBC) AirLink Blue Controller & Sensor (ALBCS) | External PIR Motion Sensor (OMSx) AirLink Blue Controller (ALBC) AirLink Blue Controller & Sensor (ALBCS) |
| Pricing | \$ | \$\$ | \$\$ |

¹ Not all versions of this product may be qualified. Please check the DLC Qualified Products List at www.designlights.org/OPL to confirm which versions are qualified
² Not all versions of this product may be available with this lens type