



# LINIARC® DIRECT/INDIRECT CURV LENSED LED

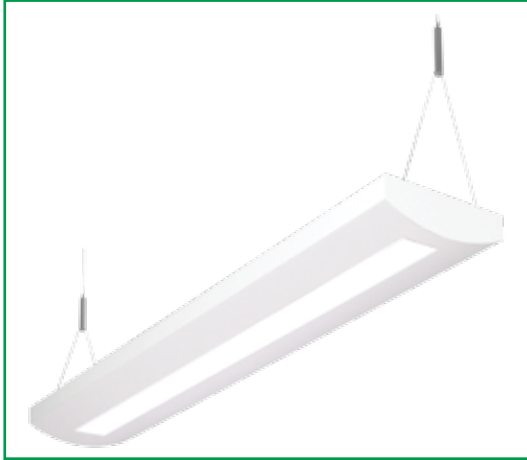

## PRODUCT HIGHLIGHTS

- **LEDs** - Use of closely-spaced medium power, high-brightness chips minimizes pixilation and provides uniform luminance. Available in 4000K, 3500K and 3000K color temperatures. CRI >=80. LM-80 reports available.
- **Shielding** - Frosted Acrylic lens.
- **Wide Variety of Distribution Patterns** - LiniArc D/I is available with a wide selection of pattern control covers that allow you to select a distribution pattern that suits your application. From 80% uplight to 100% downlight.
- **End Caps** - Flat end caps provide a clean finish.
- **4-Foot Incremental On-Grid Mounting** - Fixtures are available in 4 and 8 foot lengths to match handling capabilities on job site. 4-foot increments allow the fixtures to be mounted on standard ceiling grids, no matter how long the row. (Yoke mount only).
- **Easy Cable Attachment** - No locking plugs are needed with LiniArc fixtures. Hanging connections are secured by the end cap or the adjoining fixture.
- **Less Installation Labor** - Fixtures come with the connecting hardware pre-installed. Keyhole slots capture the joining screws and hold the fixture while the screws are tightened.
- **Easy Two-Way Adjustment** - Finger-action cable grippers on yoke mount allows simple height and side-to-side adjustment, and lock in place with a set screw. This allows the hangers to be pre-set to length on the ground prior to hanging the fixture.

## DIMENSIONS

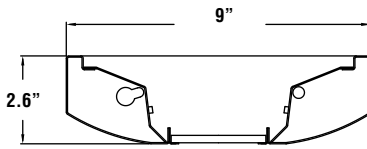

**HOUSING** - Die Formed 20-gauge steel. Low gloss textured white polyester powder coat finish.

**REFLECTOR** - Die formed steel, high-reflectance white polyester powder coat finish.

**DRIVER** - 0-10V dimming driver standard. SS and HO outputs dim to 1%. VHO output dims to 10%. Universal voltage (120-277 VAC), 347 VAC.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.

**LISTING** - U.L. listed to U.S. and Canadian safety standards.

LIGHT OUTPUT - LED CURV (Lens)									
LUMENS (nominal)									
	SS - Super Saver			HO - High Output			Watts		
	3000K	3500K	4000K	3000K	3500K	4000K	SS	HO	
CURV 4FT	3098	3194	3303	4009	4133	4274	34	44	
	VHO - Very High Output			Watts					
	3000K	3500K	4000K	VHO					
CURV 4FT	5294	5458	5644	63					

LED Chips are frequently updated therefore values may increase.

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



**ACCESSORIES** - See Accessories page for Hanging and Feed Options



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_  
 Catalog # \_\_\_\_\_

03/29/16  
 © 2016  
 LSI INDUSTRIES INC.

# LINIARC® DIRECT/INDIRECT CURV LENSED LED


## ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **CURV 8 LED 20/80 FL HO NW S WHT UE**


Prefix	Length	Light Source	Distribution	Shielding	Drive Current	Color Temp	Circuiting	Finish	Emergency Circuiting	Options	Line Voltage
CURV - Direct / Indirect <sup>1</sup>	4 - 4 foot 8 - 8 foot	LED	(Blank) 80% up; 20% down 60/40 60% up; 40% down 50/50 50% up; 50% down 30/70 30% up; 70% down 20/80 20% up; 80% down (Distribution patterns are nominal)	FL - Frosted Lens	SS - Super Saver HO - High Output VHO - Very High Output	30-3000K 35 - 3500K 40 - 4000K	S-Single	WHT - White BLK - Black SLV - Silver	Blank - None EF - Separate Individual Emergency Feed EH - Dedicated Emergency Thru-Wire Harness ES - Emergency Feed Through Main Single Circuit Harness	RAL - Custom Color (Specify - ex. RAL829) EC - Emergency Circuit Feed F - Fuse GMF - Slow-blow Fuse EM - Emergency Battery Pack LDE1 - Lutron EcoSystem Series H (1% dimming) OCS - Occupancy Sensor DHS - Daylight Harvesting Sensor	UE- Universal Voltage (120-277V)  347 - 347V

1 - Not compatible with LDI fixture


## PHOTOMETRICS




80/20 – Standard  
4274 lumens  
82% up - 18% down  
97 lm/W




60/40 – Option  
3615 lumens  
60% up - 40% down  
82 lm/W



50/50 – Option  
3428 lumens  
51% up - 49% down  
78 lm/W





30/70 – Option  
3255 lumens  
32% up - 68% down  
74 lm/W



20/80 – Option  
3115 lumens  
20% up - 80% down  
71 lm/W

## MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

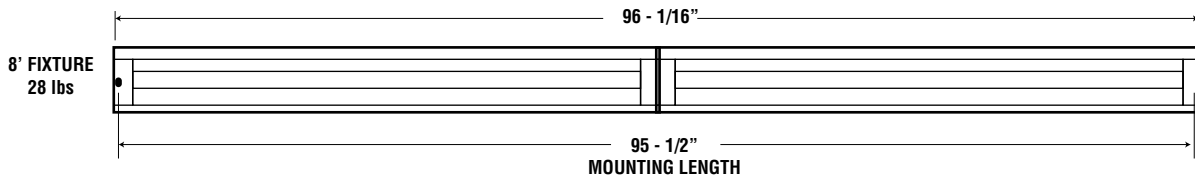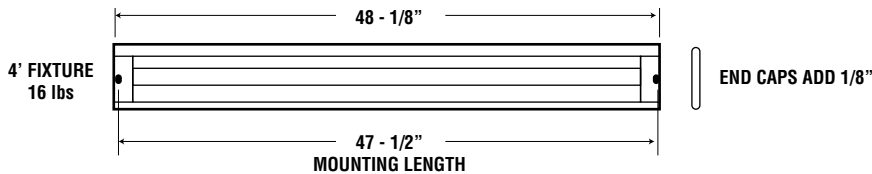

### CONTINUOUS ROW CABLE MOUNTING

4' FIXTURE - 4'-1/8"  
8' FIXTURE - 8'-1/16"



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_  
Catalog # \_\_\_\_\_

03/29/16  
© 2016  
LSI INDUSTRIES INC.