

Superior performance. Traditional square wall mount style.

The WPSOLED wall mount luminaire provides traditional square style with high performance and energy-efficient illumination resulting in significant energy savings. The WPSOLED luminaire provides uniform illumination while providing a safe and comfortable visual experience for pathway illumination, building entrances, vehicle ramps, schools, tunnels, stairways and loading docks.



Superior illumination

The WPSOLED luminaire offers package ranging from 7,108 to 11,322 lumens. Offered in brilliant white 5000K and neutral 4000K CCT.

Significant energy savings

Replaces up to 450W metal halide equivalent luminaires translating up to 84 percent in energy and maintenance savings over traditional metal halide systems.

Construction

- Rugged die-cast aluminum housing
- Removable door for ease of maintenance
- Three 1/2" threaded conduit entry points for thru-branch wiring
- IP66 Rated
- UL/cUL wet location rated

Optical

- Replaces up to 450W metal halide luminaires
- Lumen packages ranging from 7,108 to 11,322 nominal lumens
- Impact-resistant borosilicate refractive glass lens
- Greater than 91 percent lumen maintenance at 60,000 hours
- Available in 4000K CCT, 70 CRI and 5000K CCT, 70 CRI
- Fixture is DesignLights Consortium® Qualified*

Electrical

- 120-277V 50/60Hz, 347V/60Hz
- -40°C to 40°C ambient operating temperature range
- 10kV surge protection


Controls

- Button photocontrol (120-277V)

Warranty

- Five-year warranty

* DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.

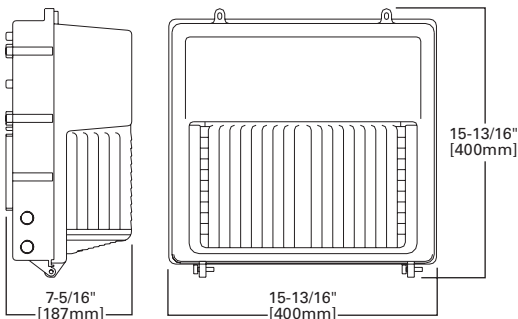

- continued

WPSQLED wall mount luminaire

Technical bulletin

Lumark

Stock Ordering Information

Stock Number	Description	UPC Code	Metal Halide Equivalent
64W Model			
WPSQLED-65-UNV*	64W WPSQLED, 120-277V, 4000K, Glass, Bronze	080083805662	175W
WPSQLED-65-UNV-7050	64W WPSQLED, 120-277V, 5000K, Glass, Bronze	080083805723	175W
WPSQLED-65-347	64W WPSQLED, 347V, 4000K, Glass, Bronze	080083805785	175W
WPSQLED-65-347-7050	64W WPSQLED, 347V, 5000K, Glass, Bronze	080083805846	175W
WPSQLED-65-UNV-PC	64W WPSQLED, 120-277V, 4000K, Glass, Bronze, Photocontrol	080083805907	175W
WPSQLED-65-UNV-7050-PC	64W WPSQLED, 120-277V, 5000K, Glass, Bronze, Photocontrol	080083805969	175W
WPSQLED-65-347-PC	64W WPSQLED, 347V, 4000K, Glass, Bronze, Photocontrol	080083806027	175W
WPSQLED-65-347-7050-PC	64W WPSQLED, 347V, 5000K, Glass, Bronze, Photocontrol	080083806089	175W
75W Model			
WPSQLED-75-UNV*	75W WPSQLED, 120-277V, 4000K, Glass, Bronze	080083805686	250W
WPSQLED-75-UNV-7050	75W WPSQLED, 120-277V, 5000K, Glass, Bronze	080083805747	250W
WPSQLED-75-347	75W WPSQLED, 347V, 4000K, Glass, Bronze	080083805808	250W
WPSQLED-75-347-7050	75W WPSQLED, 347V, 5000K, Glass, Bronze	080083805860	250W
WPSQLED-75-UNV-PC	75W WPSQLED, 120-277V, 4000K, Glass, Bronze, Photocontrol	080083805921	250W
WPSQLED-75-UNV-7050-PC	75W WPSQLED, 120-277V, 5000K, Glass, Bronze, Photocontrol	080083805983	250W
WPSQLED-75-347-PC	75W WPSQLED, 347V, 4000K, Glass, Bronze, Photocontrol	080083806041	250W
WPSQLED-75-347-7050-PC	75W WPSQLED, 347V, 5000K, Glass, Bronze, Photocontrol	080083806102	250W
101W Model			
WPSQLED-100-UNV*	101W WPSQLED, 120-277V, 4000K, Glass, Bronze	080083805709	320-450W
WPSQLED-100-UNV-7050	101W WPSQLED, 120-277V, 5000K, Glass, Bronze	080083805761	320-450W
WPSQLED-100-347	101W WPSQLED, 347V, 4000K, Glass, Bronze	080083805822	320-450W
WPSQLED-100-347-7050	101W WPSQLED, 347V, 5000K, Glass, Bronze	080083805884	320-450W
WPSQLED-100-UNV-PC	101W WPSQLED, 120-277V, 4000K, Glass, Bronze, Photocontrol	080083805945	320-450W
WPSQLED-100-UNV-7050-PC	101W WPSQLED, 120-277V, 5000K, Glass, Bronze, Photocontrol	080083806003	320-450W
WPSQLED-100-347-PC	101W WPSQLED, 347V, 4000K, Glass, Bronze, Photocontrol	080083806065	320-450W
WPSQLED-100-347-7050-PC	101W WPSQLED, 347V, 5000K, Glass, Bronze, Photocontrol	080083806126	320-450W

* Limited quantities of only these select stock configurations will be available at launch. Remaining stock configurations available Q1 2018.



Powering Business Worldwide

Eaton
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. SA514015EN
November 8, 2017 12:13 PM

Eaton is a registered trademark.
All other trademarks are property of their respective owners.
Product availability, specifications, and compliances are subject to change without notice.