

DESCRIPTION

Cambria 920 is a small dimmable LED or MR16 low voltage sign lighting luminaire. It attaches to a wall mounted 36 in. hook arm and delivers 180° of vertical adjustment for easy aiming. Optional 24", 30" or 36" hook arms are available. Various lenses, louvers and color or dichroic filters can be combined - up to three at once - to create multiple lighting effects. The Lumiere exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires.

SPECIFICATION FEATURES

Material

Housing, hood, hook arm and wall mounting plate are precision-machined from corrosion-resistant 6061-T6 aluminum.

Finish

Fixtures are double protected by a chromate conversion undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment. A variety of standard colors are available. Options to meet Buy American and other domestic preference requirements.

Hood

Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects. Weep holes prevent water and mineral stains from collecting on the lens, even in the straight-up position.

Gasket

Housing and hood are sealed with a high temperature silicone o-ring gasket to prevent water intrusion.

Lens

Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock.

Adjustable Mounting Arm

Standard 36" hook arm with adjustable center rear swivel provides 180° of vertical adjustment for easy aiming. Optional 24", 30", or 36" hook arms are available (specify option -HA24, -HA30 or -HA36). Stainless steel aim-locking mechanisms are standard. 4-1/4" diameter wall mounting plate attaches directly to standard J-box with screws provided. Lumiere's exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires.

Hardware

Stainless steel hardware is standard to provide maximum corrosion-resistance.

Socket

Ceramic socket with 250° CTeflon® coated lead wires and GU5.3 bi-pin base.

Catalog #		Type
Project		
Comments		Date
Prepared by		

Electrical

Remote 12V transformer required (not included). Initial power draw on LED equipped fixtures is 12 watts. When sizing transformer use 12 watts per LED fixture. Nominal power draw after start up is 8 watts. Also, LEDs are more voltage sensitive than standard halogen MR16 lamps. The LED module is designed to operate within the range 12V +/- 1.2V. Any less or more voltage can cause premature failures.

Lamp

Halogen lamp not included. SORAA LED modules are included and are available in three color temperatures (2700, 3000 and 4000) or Amber (585-595nm) and three distributions (spot, narrow, and flood). Both color temperature and distribution must be specified when ordering. Sora lamp compatible (8W Max).

Warranty

Lumiere warrants its fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers and lamps carry the original manufacturer's warranty.



920 CAMBRIA LED HALOGEN

APPLICATIONS:
SIGN LIGHT




CERTIFICATION DATA

UL and cUL Wet Location Listed
LM79 / LM80 Compliant
ROHS Compliant
IP65 Ingress Protection Rated

TECHNICAL DATA

Low Voltage:
50W Max Halogen MR16
8W LED, L70/60,000 hours at 25°

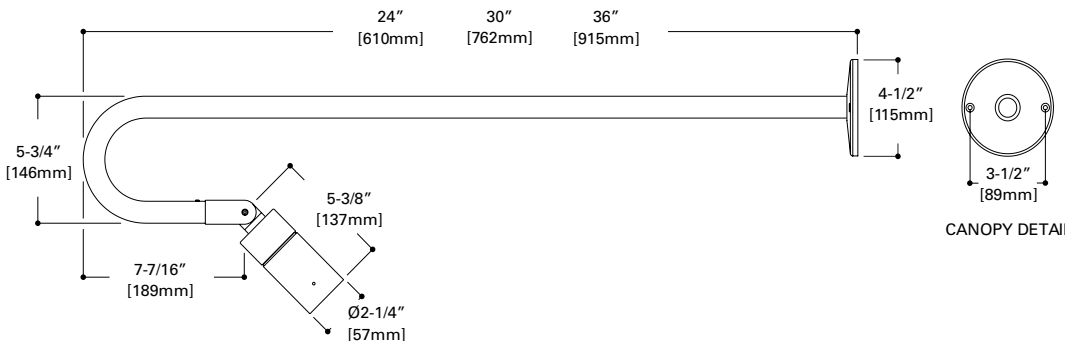

ORDERING INFORMATION

Sample Number: 920-8LED2710-12-BK-HA24


Domestic Preferences 4	Series	Source (for LED, select from each column and combine)	Voltage	Finish	Stem Length		
[Blank]=Standard BAA=Buy American Act TAA=Trade Agreements Act	920=LED or MR16 Cambria Sign Light, Hook Arm, Center Rear Swivel, Single Head	50MR16=50W max. Halogen MR16 (lamp not included)		12=12V	Painted BK=Black BZ=Bronze CS=City Silver VE=Verde WT=White	HA24=24" Length HA30=30" Length HA36=36" Length	
		8LED=8W LED	27=2700K 30=3000K 40=4000K				10=10° Spot 25=25° Narrow 36=36° Wide
		5LED=5W LED	AM=Amber (585-595nm)				

NOTES: 1 Unless noted otherwise, lamps not included. 2 See Accessories & Technical Data section of Lumiere catalog for Mounting Accessories. 3 Consult your customer service representative for additional options and finishes. 4 Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 5 Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

OPTICAL ACCESSORIES - ORDER SEPARATELY ⁵

Filters (2.00" Diameter)	Optical Lenses (2.00" Diameter)	Optical Louvers (2.00" Diameter)
F71 =Peach Dichroic F72 =Amber Dichroic F73 =Green Dichroic F74 =Medium Blue F75 =Yellow Dichroic F76 =Red Dichroic F77 =Dark Blue Dichroic F78 =Light Blue Dichroic F79 =Neutral Density Dichroic F80 =Magenta Dichroic F22 =Red Color F33 =Blue Color F44 =Green Color F55 =Yellow Color F66 =Mercury Vapor	LSL = Linear Spread Lens (elongates standard beam spread) DIF = Diffused Lens (provides even illumination) OSL = Overall Spread Lens (increases standard beam spread)	LVR = 45° Hex Cell Louver (reduces glare)

CAMBRIA 920 MR16 HALOGEN PHOTOMETRY DATA



Horizontal Illuminance on Surface - Cambria 920 Standard Recessed Hood - 50W MR16

Filename	920-50MR16-12-BK-NSP.ies	
Lamp	50W MR16 NSP	
CBCP	11,000	
Distance	FC	Beam Diameter
2'	2550	1'6"
4'	638	1'0"
6'	283	1'6"
8'	159	2'0"
10'	102	3'0"
15'	45	4'0"

Filename	920-50MR16-12-BK-NFL.ies	
Lamp	50W MR16 NFL	
CBCP	3,200	
Distance	FC	Beam Diameter
2'	725	1'0"
4'	181	2'6"
6'	81	4'0"
8'	45	5'0"
10'	29	6'6"
15'	12	10'0"

CCT MULTIPLIER

Lamp Wattage	Multiplier
20W	0.32
35W	0.57

Filename	920-50MR16-12-BK-FL.ies	
Lamp	50W MR16 FL	
CBCP	2,000	
Distance	FC	Beam Diameter
2'	431	1'6"
4'	106	3'0"
6'	48	5'0"
8'	27	6'6"
10'	17	8'0"
15'	7	12'0"

Filename	920-50MR16-12-BK-WFL.ies	
Lamp	50W MR16 WFL	
CBCP	1,200	
Distance	FC	Beam Diameter
2'	269	2'0"
4'	67	4'6"
6'	30	7'6"
8'	17	9'0"
10'	11	11'6"
15'	5	17'0"

NOTES AND FORMULAS


- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.

CAMBRIA 920 LED PHOTOMETRY DATA

**LED Lumen and CBCP Table - 4000K
8W LED**

		Flush Hood			Regressed Hood (black)			Regressed Hood (silver)		
		CBCP	LUMENS	LPW	CBCP	LUMENS	LPW	CBCP	LUMENS	LPW
10	BASE	5980	351.3	43.6	5541	298.5	371	5052	296.9	39.7
	+DIFF	985	286.9	35.8	968	220.4	274	930	233.2	31.2
	+LSL	1310	309.9	38.6	1299	253.1	31.4	1200	252.7	33.8
	+LVR	5270	243.0	30.6	4838	235.3	29.2	4633	225.1	30.1
	+OSL	1686	328.6	41.4	1700	285.7	35.5	1609	291.1	39
25	BASE	2690	4172	53.5	2559	374.2	474	2357	361.8	49.4
	+DIFF	761	338.6	43.4	729	267.7	33.9	720	281.4	36.2
	+LSL	795	375.1	48.1	778	316.3	40.2	719	312.0	42.2
	+LVR	2396	285.9	36.7	2294	272.4	34.1	2092	253.3	35.3
	+OSL	1452	383.4	49.1	1414	345.0	43.8	1328	341.2	45.2
36	BASE	1144	409.2	53.1	1125	369.1	47.6	1080	371.7	49
	+DIFF	542	336.3	43.6	532	264.3	34.1	502	268.6	35.1
	+LSL	486	371.1	48.2	480	305.6	39.4	484	317.4	41.7
	+LVR	1030	267.9	34.8	996	252.1	32.4	967	251.8	33.1
	+OSL	930	384.3	49.9	932	337.8	43.6	910	348.6	45.7

Horizontal Illuminance on Surface - Cambria 920 Standard Recessed Hood -4000K

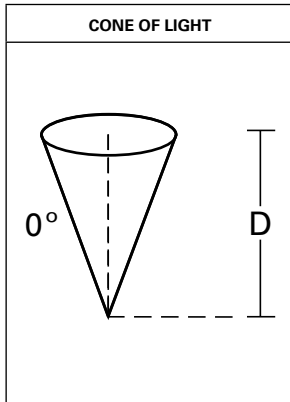

Filename: 920-SS-8LED4010-12-BK.IES			
Test No.: G2-1802-569-4			
Distance	FC	Beam Diameter	
2'	1385.2	0.4	
4'	346.3	0.8	
6'	153.9	1.2	
8'	86.6	1.6	
10'	55.4	2	
15'	24.6	3.2	
20'	13.9	4.2	
30'	6.2	6.4	
40'	3.5	8.4	

Filename: 920-SS-8LED4025-12-BK.ies			
Test No.: G2-1802-569-5			
Distance	FC	Beam Diameter	
2'	639.8	0.6	
4'	159.9	1.2	
6'	71.1	1.8	
8'	40	2.4	
10'	25.6	3	
15'	11.4	4.6	
20'	6.4	6	
30'	2.8	9.2	
40'	1.6	12.2	

Filename: 920-SS-8LED4036-12-BK.ies			
Test No.: G2-1802-569-6			
Distance	FC	Beam Diameter	
2'	281.2	1	
4'	70.3	2.2	
6'	31.2	3.4	
8'	17.6	4.6	
10'	11.2	5.8	
15'	5	8.6	
20'	2.8	11.6	
30'	1.2	17.4	
40'	0.7	23.2	

CCT MULTIPLIER TABLE

CCT(K) / COLOR	MULTIPLIER
2700K	0.91
3000K	0.89
4000K	1.00

Note: Multiplier can be used to calculate center beam candle power (CBCP), Lumens and footcandle (FC) values.

TECHNICAL INFORMATION

1. Dimming is dependant on remote transformer compatibility with LED module. Please see [compatibility matrix](#) for dimmer switch and transformer selection.
2. IMPORTANT: When sizing transformer use 12 watts per LED fixture. Nominal power draw after start up is 8 watts. Any less or more voltage can cause premature failures.