## **AWARNING**

# IMPORTANT SAFETY INFORMATION - READ, FOLLOW, AND SAVE ALL SAFETY AND INSTALLATION INSTRUCTIONS.

- Product must be installed in accordance with all National Electrical Code, Canadian Electrical Code, and all Local and Provincial Codes.
- Follow product label information and instructions before installing fixture. Retain installation instructions for future reference.
- Wiring and installation to be performed by a qualified electrician only. Turn OFF power before initial installation, servicing and maintenance.

#### IMPORTANT LISTINGS AND CERTIFICATIONS SPECIFIC TO FIXTURE


- · SUITABLE FOR DAMP LOCATIONS.
- REMOUNT MOUNTABLE IN A JUNCTION BOX A MAX DISTANCE OF 25 FEET. (VOLTAGE DROP NEEDS TO BE CONSIDERED)
- IF THERE IS ROOM THE DRIVER CAN BE PLACED IN JUNCTION BOX BEHIND WALL PLATE. SEE SPEC SHEET FOR DRIVER DIMENSIONS.

#### HARDWARE REQUIRED FOR INSTALLATION (PROVIDED BY OTHERS)

Wire connectors (recommend silicone filled outdoor rated wire connectors).

## DRIVER WIRING DIAGRAMS BASED ON DIMMING TYPE: (DIMELV OR DIM10)

### **DIMELV: ELV (Reverse Phase Dimming)/Non-Dimming Option**

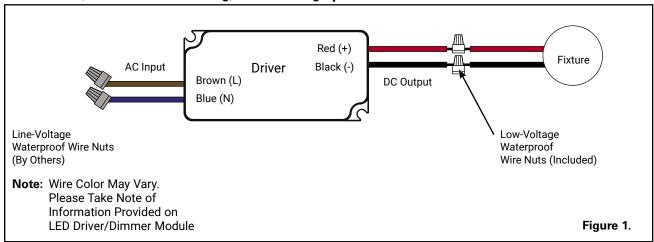

## **DIM10: 0-10V Dimming Option**

