

# COOPER LIGHTING SOLUTIONS - METALUX®

## DESCRIPTION

The GR8-IC is a T8-dedicated lensed troffer designed to offer premium performance in a low profile housing. T8 dedication and optimized lamp to lens spacing provides the best in energy efficiency and optical control. The GR8-IC's shallow, low profile housing is compatible with even highly restrictive plenums. Luminaires are compatible with today's popular ceiling systems.

The GR8-IC offers great performance and great quality. The series is an excellent choice for commercial offices, schools, hospitals, retail merchandising and many other applications.

|                    |  |             |
|--------------------|--|-------------|
| <b>Catalog #</b>   |  | <b>Type</b> |
| <b>Project</b>     |  |             |
| <b>Comments</b>    |  | <b>Date</b> |
| <b>Prepared by</b> |  |             |

## SPECIFICATION FEATURES

### Construction

Unitized low profile recessed housing is die formed of code gauge prime cold rolled steel with full length stiffeners and unibody endplate for added strength. Ballast cover is easily removed without tools. Die formed captive lampholder bracket fully encloses lampholder wiring for easy lampholder replacement. Ample KO's are provided for continuous row wiring. Built-in grid-lock feature for safety and convenience.

### Electrical\*\*

Ballasts are CBM/ETL Class "P" and are positively secured by mounting bolts. Rotor-lock lampholders. UL/CUL listed. IC recessed luminaire for direct contact with insulation. Suitable for damp locations.

### Finish

Multistage, iron phosphate pretreatment ensures maximum bonding and rust inhibition. Lighting grade baked white enamel finish with premium reflectance for high efficiency.

### Hinging/Latching

Positive spring loaded steel latches and safety lock T-hinges provide secure, high quality door fit and allow hinging and latching from either side.

### Frame/Shielding

Heavy gauge flat steel door is die formed with reinforced mitered corners. Housing and door frame assemblies incorporate full width mechanical light traps. Light stabilized, acrylic prismatic lens.

### Controls

Fifth Light ballast options are offered for both 0-10V continuous dimming and DALI applications. Combine with energy-saving products like occupancy sensors, daylighting controls, and lighting relay panels from Cooper Lighting Solutions ([www.cooperlighting.com](http://www.cooperlighting.com)) to maximize energy savings.



**2GR8-IC**  
228T8, 232  
428T8, 432

2' X 4' TROFFER  
2 OR 4 LAMP

General Purpose  
T8 Commercial Troffer  
For Use in Insulated Ceilings



## ENERGY DATA

Input Watts:  
EB Ballast & STD Lamps  
228T8 (49), 232 (61)  
428T8 (98), 432 (122)

Luminaire Efficacy Rating  
LER = FL-82  
Catalog Number: 2GR8-232A  
Yearly Cost of 1000 lumens,  
3000 hrs at .08 KWH = \$2.93

Catalog Number: 2GR8-432A  
LER = FL-76  
Yearly Cost of 1000 lumens,  
3000 hrs at .08 KWH = \$3.16

\*Standard G (Grid) Type Fixtures can be field converted by adding trim kits. See Compatibility Section or Consult Factory.

\*\*Reference the lamp/ballast data in the Technical Section for specific lamp/ballast requirements.

\*\*\*When ordering Flange Kit for installation in drywall ceilings, see options and accessories compatibility section and ordering logic.


LAMPS CONTAIN MERCURY. DISPOSE ACCORDING TO LOCAL, STATE OR FEDERAL LAWS

**LINEAR DISCONNECT**


Safe and convenient means of disconnecting power.




ADF122070

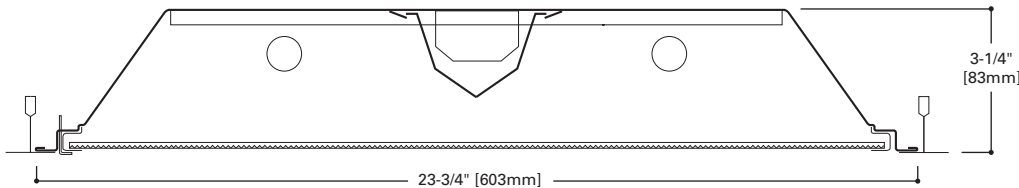

## MOUNTING DATA

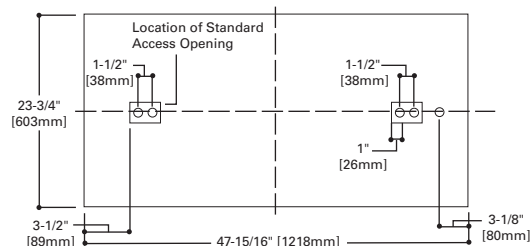


## LAMP CONFIGURATIONS

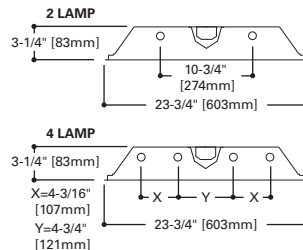


## DOOR FRAMES

2GR8  
Flat, White  
Steel (White  
Latches)




## CEILING COMPATIBILITY

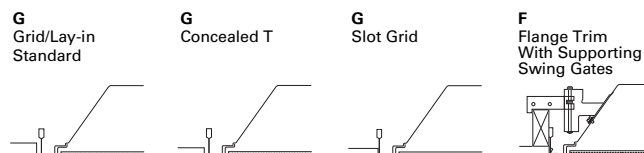

| Ceiling Type | Trim Type |
|--------------|-----------|
| Exposed Grid | G         |
| Concealed T  | G         |
| Slot Grid    | G         |
| Flange       | G***      |

COOPER LIGHTING SOLUTIONS

PHOTOMETRICS

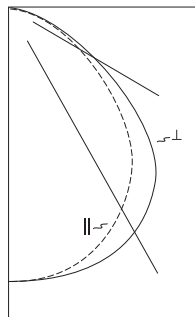

**2GR8IC-232A**  
 Electronic Ballast  
 F32T8/35K lamps  
 2800 lumens  
 Spacing criterion:  
 (II) 1.2 x mounting  
 height, (L) 1.4 x  
 mounting height  
 Efficiency 79.8%  
 Test Report:  
 2GR8IC232A.IES  
 LER = FL-67  
 Yearly Cost of 1000  
 lumens, 3000 hrs at  
 .08 KWH = \$3.58

| Candela |          |      |          |
|---------|----------|------|----------|
| Angle   | Along II | 45°  | Across L |
| 0       | 1697     | 1697 | 1697     |
| 5       | 1689     | 1696 | 1705     |
| 10      | 1669     | 1685 | 1703     |
| 15      | 1636     | 1665 | 1694     |
| 20      | 1586     | 1632 | 1673     |
| 25      | 1518     | 1582 | 1634     |
| 30      | 1430     | 1512 | 1582     |
| 35      | 1320     | 1427 | 1517     |
| 40      | 1188     | 1318 | 1422     |
| 45      | 1031     | 1162 | 1271     |
| 50      | 843      | 964  | 1046     |
| 55      | 657      | 740  | 796      |
| 60      | 501      | 528  | 581      |
| 65      | 378      | 353  | 405      |
| 70      | 277      | 232  | 294      |
| 75      | 196      | 172  | 231      |
| 80      | 143      | 144  | 176      |
| 85      | 77       | 85   | 97       |
| 90      | 0        | 0    | 0        |

**Coefficients of Utilization**

| rc  | Effective floor cavity reflectance |    |    |    |     |    |    |    |     |    |    |    |     |    |    |    |     |    |    |    |    |    |    |    |    |
|-----|------------------------------------|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|----|----|----|----|----|
|     | 80%                                |    |    |    | 70% |    |    |    | 50% |    |    |    | 30% |    |    |    | 10% |    |    |    | 0% |    |    |    |    |
|     | 70                                 | 50 | 30 | 10 | 70  | 50 | 30 | 10 | 50  | 30 | 10 | 50 | 30  | 10 | 50 | 30 | 10  | 50 | 30 | 10 | 50 | 30 | 10 |    |    |
| RcR | 95                                 | 95 | 95 | 95 | 93  | 93 | 93 | 93 | 89  | 89 | 89 | 85 | 85  | 85 | 81 | 81 | 81  | 80 | 73 | 72 | 71 | 69 | 61 | 60 | 60 |
| 1   | 88                                 | 85 | 82 | 79 | 86  | 83 | 80 | 78 | 79  | 77 | 75 | 76 | 74  | 73 | 73 | 72 | 71  | 69 | 66 | 64 | 61 | 60 | 54 | 52 | 52 |
| 2   | 81                                 | 75 | 70 | 66 | 79  | 74 | 69 | 66 | 71  | 67 | 64 | 68 | 65  | 63 | 66 | 64 | 61  | 60 | 54 | 52 | 52 | 45 | 45 | 45 |    |
| 3   | 75                                 | 67 | 62 | 57 | 73  | 66 | 61 | 56 | 64  | 59 | 55 | 62 | 58  | 55 | 60 | 56 | 54  | 52 | 44 | 41 | 39 | 39 | 34 | 34 | 34 |
| 4   | 69                                 | 60 | 54 | 49 | 67  | 59 | 53 | 49 | 57  | 52 | 48 | 56 | 51  | 47 | 54 | 50 | 47  | 45 | 41 | 39 | 36 | 34 | 30 | 30 | 30 |
| 5   | 63                                 | 54 | 47 | 42 | 62  | 53 | 47 | 42 | 51  | 46 | 42 | 50 | 45  | 41 | 48 | 44 | 41  | 39 | 36 | 34 | 34 | 26 | 26 | 26 |    |
| 6   | 58                                 | 48 | 42 | 37 | 57  | 48 | 41 | 37 | 46  | 41 | 36 | 45 | 40  | 36 | 44 | 39 | 36  | 34 | 31 | 30 | 30 | 22 | 22 | 22 |    |
| 7   | 54                                 | 44 | 37 | 32 | 53  | 43 | 37 | 32 | 42  | 36 | 32 | 41 | 35  | 32 | 40 | 35 | 31  | 30 | 27 | 26 | 26 | 20 | 20 | 20 |    |
| 8   | 50                                 | 39 | 32 | 28 | 48  | 39 | 32 | 28 | 38  | 32 | 28 | 37 | 31  | 28 | 36 | 31 | 27  | 26 | 24 | 22 | 22 | 17 | 17 | 17 |    |
| 9   | 46                                 | 35 | 29 | 24 | 45  | 35 | 28 | 24 | 34  | 28 | 24 | 33 | 28  | 24 | 32 | 27 | 24  | 22 | 16 | 16 | 16 | 12 | 12 | 12 |    |
| 10  | 42                                 | 32 | 26 | 21 | 41  | 31 | 25 | 21 | 31  | 25 | 21 | 30 | 25  | 21 | 29 | 24 | 21  | 20 | 11 | 11 | 11 | 8  | 8  | 8  |    |

**Zonal Lumen Summary**

| Zone  | Lumens | %Lamp | %Fixture |
|-------|--------|-------|----------|
| 0-30  | 1360   | 24.3  | 30.4     |
| 0-40  | 2249   | 40.2  | 50.3     |
| 0-60  | 3788   | 67.6  | 84.7     |
| 0-90  | 4471   | 79.8  | 100.0    |
| 0-180 | 4471   | 79.8  | 100.0    |

**Typical VCP Percentages**

| Room Size (Ft.) | Height Along |       | Height Across |       |
|-----------------|--------------|-------|---------------|-------|
|                 | 8.5'         | 10.0' | 8.5'          | 10.0' |
| 20 x 20         | 73           | 77    | 71            | 75    |
| 30 x 30         | 68           | 72    | 65            | 69    |
| 30 x 60         | 60           | 63    | 56            | 59    |
| 60 x 30         | 69           | 73    | 68            | 71    |
| 60 x 60         | 60           | 63    | 57            | 60    |

**ORDERING INFORMATION**

SAMPLE NUMBER: 2GR8-IC-232A-UNV-EB81-U

|  |  |   |
|--|--|---|
| <b>Rating</b><br><b>Blank</b> =<br>Standard<br><b>ATW-SW4</b> =<br>Chicago<br>Rated    | <b>Number of Lamps</b><br><b>2</b> =2 Lamps<br><b>4</b> =4 Lamps<br>(Not included)   | <b>Voltage</b> <sup>(2)</sup><br><b>347V</b> =347 Volt<br><b>UNV</b> =Universal<br>Voltage 120-277 <sup>(3)</sup>   |
| <b>Width</b><br><b>2</b> =2' Width   | <b>Wattage</b><br><b>28T8</b> =28W T8 (48")<br><b>32</b> =32W T8 (48") <sup>(4)</sup>  | <b>Options</b><br><b>GL</b> =Single Element Fuse<br><b>GM</b> =Double Element Fuse<br><b>Flex</b> =Flex Installed<br>(Reference Flex ordering<br>information)<br><b>EL</b> =Emergency Installed <sup>(11)</sup> |
| <b>Trim Type</b><br><b>G</b> =Grid/Lay-in<br>(Standard)                                | <b>Shielding</b><br><b>A</b> =#12 Acrylic Pattern<br><b>A125</b> =#12 Pattern<br>Acrylic (.125" Thick)<br><b>A19/156</b> =#19 Pattern<br>Acrylic (.156" Thick) |   |
| <b>Series</b><br><b>R8</b> =General Purpose<br>T8 Commercial<br>Troffer <sup>(1)</sup> |  |   |
| <b>Type</b><br><b>IC</b> =IC Rated   |  |   |

**NOTES:** <sup>(1)</sup>An EQ Grid Clip is recommended for all 9/16" ceiling systems. Four required per fixture. <sup>(2)</sup>Products also available in non-US voltages and frequencies for international markets. <sup>(3)</sup>Not available when specifying emergencies, voltage must be specific. <sup>(4)</sup>Ballast Factor is 0.88 for 4 lamp 32W T8 fixtures. <sup>(5)</sup> For a complete listing of Fifthlight Technology products and other solutions from Cooper Lighting Solutions, visit [www.cooperlighting.com](http://www.cooperlighting.com). <sup>(6)</sup> 0-10V ballast do not include DALI feature. Please select DALI ballast for use with Fifth Light system. <sup>(7)</sup> Specification grade 0-10V dimming ballast are NEMA premium and CEE listed. They are compatible with low mercury and energy saving lamps. <sup>(8)</sup> Specification Grade 0-10V ballast not offered in 3 or 4-lamp versions. <sup>(9)</sup> Standard 0-10V ballast not available for 28W T8 lamps. <sup>(10)</sup> Voltage must be specified for Standard 0-10V 32W 3 and 4-lamp ballast. 4-lamp ballast versions must be 277V. <sup>(11)</sup> Please specify required voltage, 120V or 277V.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Solutions Representative for availability and ordering information.

**Ballast Type**

**EB8\_**=T8 Electronic Start.  
 Total Harmonic Distortion < 10%

**EB8\_/PLUS**= T8 Electronic Start.  
 Total Harmonic Distortion < 10%.  
 High Ballast Factor > 1.15.

**ER8\_** = T8 Electronic Program Rapid Start.  
 Total Harmonic Distortion < 10%

**High Performance T8 Ballasts**

**HB8\_**=T8 Electronic Instant Start.  
 Total Harmonic Distortion < 10%.  
 Standard Ballast Factor .86 – .88

**HB8\_L**=T8 Electronic Instant Start.  
 Total Harmonic Distortion < 10%.  
 Low Ballast Factor .77 – .82

**HB8\_N**=T8 Electronic Instant Start.  
 Total Harmonic Distortion < 10%.  
 Normal Ballast Factor 1.0

**HB8\_H**=T8 Electronic Instant Start.  
 Total Harmonic Distortion < 10%.  
 High Ballast Factor 1.15 – 1.20

**HR8\_**T8 Electronic Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 Standard Ballast Factor .86 – .88

**HR8\_DIM**=T8 Electronic Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 Step Dimming. Ballast Factor .88

**HR8\_L**=T8 Electronic Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 Low Ballast Factor .71 – .79

**HR8\_H**=T8 Electronic Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 High Ballast Factor 1.15 – 1.20

**0-10V Dimming Ballasts** <sup>(6)</sup>

**5LTV8\_**=T8 0-10V Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 Ballast Factor 0.87 <sup>(8), (10)</sup>

**5LTVS8\_**=T8 0-10V Spec Grade Program  
 Rapid Start. Total Harmonic  
 Distortion < 10%. Ballast Factor  
 0.87 <sup>(7), (8)</sup>

**Fifth Light DALI Ballasts** <sup>(5)</sup>

**5LT8\_**=T8 DALI Program Rapid Start.  
 Total Harmonic Distortion < 10%.  
 Ballast Factor 1.0

**Number of Ballasts**  
**1**=1 Ballast  
**2**=2 Ballasts  
**3**=3 Ballasts

**Packaging**  
**U**=Unit Pack  
**PAL**=Job  
 Pack, out of  
 carton  
**PALC**=Job  
 Pack, in  
 carton

**ACCESSORIES**

**EQ-CLIP-U**=T-BAR Safety Earthquake Clips <sup>(11)</sup>  
**FCTKA-24W-U**=Field Installed Flange Kit

**FCTK** | **A** - **24** | **R** | **W** - **U**

|                                  |   |                                      |
|----------------------------------|---|--------------------------------------|
| Trim Kit<br>Field<br>Convertible | <b>22</b> =2' x 2'<br><b>24</b> =2' x 4'                      | <b>N</b> =Natural<br><b>W</b> =White |
| Aluminum                         | <b>Blank</b> =Single<br><b>R</b> =In Row<br><b>E</b> =End Row | <b>U</b> =Unit Pack                  |

**SHIPPING INFORMATION**

| Catalog No.    | Wt.     |
|----------------|---------|
| 2GR8-IC-228T8A | 20 lbs. |
| 2GR8-IC-232A   | 20 lbs. |
| 2GR8-IC-428T8A | 20 lbs. |
| 2GR8-IC-432A   | 20 lbs. |

