



# Portfolio

LAM4B 4-inch multi-head

1, 2, 3 or 4 multi-head recessed





# Accent Lighting that Inspires

The Portfolio 4-inch multi-head family is offered in 1, 2, 3, and 4 head. Delivering 800 or 1200 lumens per head providing glare free illumination from a discrete source with limitless creative design options. This Multi-head luminaire will fit seamlessly in any new or existing architectural space where accent lighting is required. The 4-inch multi-head family is available with a flangeless trim for mud in applications creating an uninterrupted installation.

***Imagine the possibilities.***

# 4-inch multi-head LED luminaire

## Features

- Offered in 1, 2, 3 and 4 heads
- New construction and install from below
- 800 or 1200 lumens per luminaire
- Matte black, matte white, matte metallic silver painted finishes
- Adjustable: +/- 70° tilt with 355° rotation
- Standard 0-10V, 120-277V, 1% with dual leading edge driver
- Optional 0-10V <1% driver; DALI / DMX / DLVP
- 2400, 2700, 3000, 3500, 4000 and 5000K; 90 CRI
- WaveLinx and emergency options available



## Multi-head collection



LAM4B1




LAM4B2



LAM4B3



LAM4B4

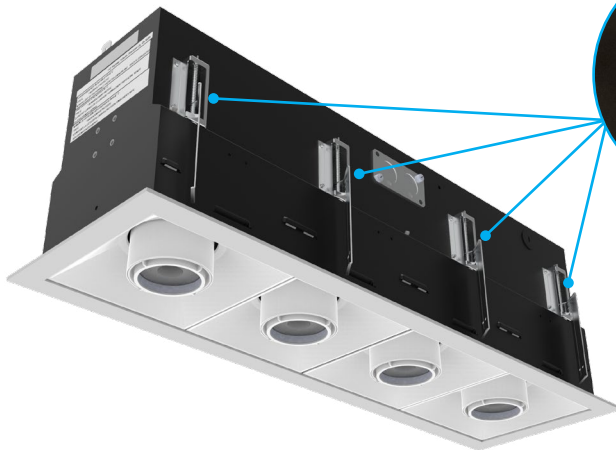

### Remodel Housings

- Below-ceiling installation
- Speed clamps secure housing to the ceiling.

## Flange or Mud-in



Flange trims are included, offering a slim 0.75" minimal ceiling presence; yet helps hide imperfections from ceiling material cutouts.



The flange-less mud-in kit\* is a field installed accessory that replaces the flange, and offers a clean line where gypsum meets the housing. A tapered 0.8mm offers minimal depth variance.



ALL luminaires are Insulated Ceiling (IC) rated.



A Chicago Plenum option is also available for our friends in the Windy City.

\* Mud-in kit is for use with new construction housings, and not compatible with remodel housings.



Dedicated CCT options for every space.



2400K  
nominal

2700K  
nominal

3000K  
nominal

3500K  
nominal

4000K  
nominal

5000K  
nominal



Create  
layered light



**355°**  
ROTATION


## Adjustable Beam Angle

Each fixture head allows for 70° tilt out of the luminaire and 355° of rotation for full aiming flexibility. *Put the light where you want it.*

## Primary Optical Elements

Interchangeable silicone optics in 5° increments from 10°-70° providing smooth beam without color separation

- Primary optics are field interchangeable and lock into place with a twist.
- Excellent optical efficiency with no stray lumens
- Integral lens holder accepts up to (2) 2" diameter 3.0mm thick color filters or lens

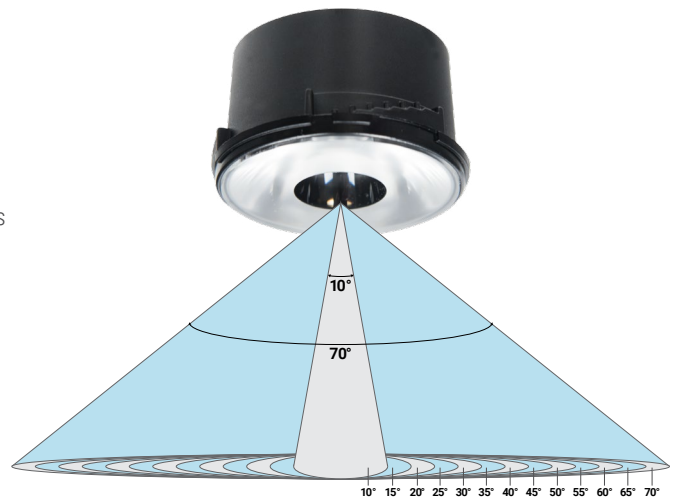

## Head, Baffle and Flange Finish



**MW**  
matte white



**MB**  
matte black



**MMS**  
matte metallic silver

### Lighting Product Lines

Ametrix  
AtLite  
Corelite  
Ephesus  
Fail-Safe  
HALO  
HALO Commercial  
Invue  
io  
IRiS  
Lumark  
Lumière  
McGraw-Edison  
Metalux  
MWS  
Neo-Ray  
Portfolio  
RSA  
Shaper  
Streetworks  
Sure-Lites

### Controls Product Lines

Fifth Light Technology  
Greengate  
iLight (International Only)  
iLumin  
Zero 88

### Connected Lighting Systems

Distributed Low-Voltage Power  
HALO Home  
WaveLinx  
Trellix



**Cooper Lighting Solutions**  
1121 Highway 74 South  
Peachtree City, GA 30269  
P: 770-486-4800  
[www.cooperlighting.com](http://www.cooperlighting.com)

**Canada Sales**  
5925 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
P: 905-501-3000  
F: 905-501-3172

© 2020 Cooper Lighting Solutions  
All Rights Reserved  
Printed in USA  
Publication No. BR520054EN  
January 15, 2021 8:41 AM

[portfolio-lighting.com](http://portfolio-lighting.com)

---

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.