

Project		Catalog #		Type	
Prepared by		Notes		Date	



# Portfolio

## LDA4A 4L

4-Inch Adjustable Slope, Wall Wash  
New Construction  
900, 1300, 1800, 2800 Lumens

### Typical Applications

Healthcare • Hospitality • Retail • Institutional • Indoor Display & Signage

### Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 3](#)
- Energy & Performance Data [page 4](#)
- Photometric Data [page 4](#)
- Connected Systems [page 6](#)
- Product Warranty

### Product Certification



### Control Compatibility



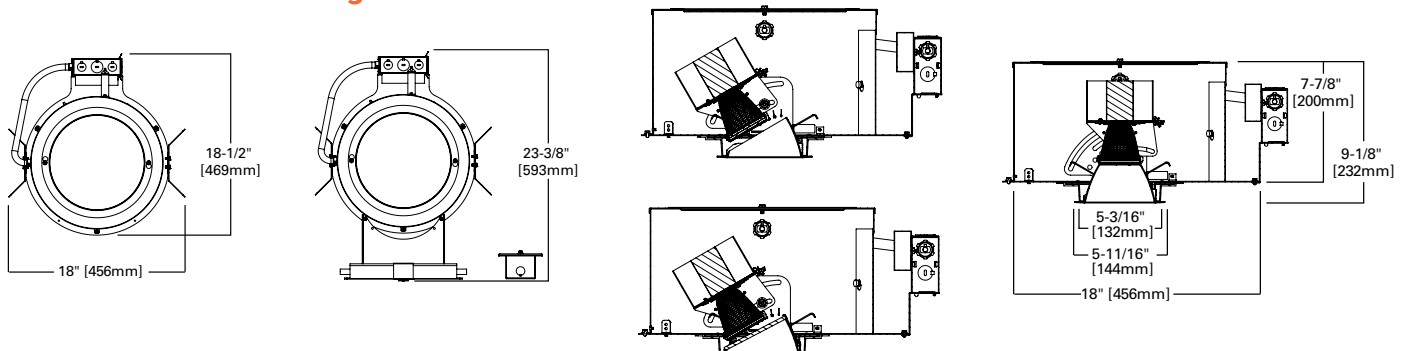
### Product Features



### Top Product Features

- Adjustable accent/slope or lensed wall wash (flat or sloped ceilings)
- Excellent light control and low aperture brightness
- Lockable 365° rotation and 45° tilt holds any aiming position
- Round spun aluminum reflectors, Holds 2 lens media
- 4 color temperatures: 2700K, 3000K, 3500K and 4000K CCT
- CRI: 80 or 90
- Angle cut, lensed wall wash, lensed and flat cut downlight reflectors
- Lumens: 900-2,800, Field-interchangeable optics: 15°, 25° or 55°
- Options to meet Trade Agreements Act requirements

### Dimensional and Mounting Details



Order Information

SAMPLE ORDER NUMBER: **LDA4A09835D010TE**

Domestic Preferences <sup>(15)</sup>	Housing	Lumens <sup>(1)</sup>	CRI	CCT	Driver <sup>(11)</sup>	Options <sup>(3) (7)</sup>
[Blank]=Standard TAA=Trade Agreements Act	LDA4A=4" Aperture adjustable/slope LDA4ACP=4" Aperture adjustable/slope,Chicago Plenum	09=900 (IC Rated) 13=1300 (IC Rated) 18=1800 (IC Rated) 28=2800 (Non-IC) <sup>(6)</sup>	8=80 CRI 9=90 CRI	27=2700K 30=3000K 35=3500K 40=4000K 30D2W= Dim to warm - 3000K to 1850K (1800 lumen and below, 90 CRI) <sup>(8)</sup>	<b>900, 1300, 1800 and 2800 Lumen</b> D010TE=120-277V 0-10V 1% dimming or trailing edge 120V DSLTL=Fiith Light® DALI DT6 Logarithmic Dimming, 0% to 100%, 120V-277V DE010=0-10V Linear Dimming, 0% to 100%, 120V-277V DLT=Hi-Lume Forward Phase 2-wire dimming 120V DMX=DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V DMXC5=DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, with RJ45 connection  <b>900, 1300 and 1800 Lumen</b> D010TR=120-277V 0-10V 1% dimming or leading edge 120V	EMBOD=7W Bodine® Emergency Module with Remote Test Switch EMBOD7ST=Bodine® Emergency Module with Self Test Remote Test Switch EM7=7W Emergency Module with Remote Test Switch EM14=14W Emergency Module with Remote Test Switch WPN = WaveLinX PRO Wireless Node without sensor <sup>(17)</sup>

SAMPLE ORDER NUMBER: **LAR25NF**

Beam Forming Reflector
LAR15SP=15° optic LAR25NF=25° optic LAR35FL=35° optic

SAMPLE ORDER NUMBER: **4LLWW1LI**

Reflector	Finish	Options
4LA0=4" Adjustable Accent, Polymer Trim Ring 4LA1=4" Adjustable Accent, Self Flanged 4LLW0=4" Lensed Wall Wash, Polymer Trim Ring <sup>(9)</sup> 4LLW1=4" Lensed Wall Wash, Self Flanged <sup>(9)</sup> 4LAL0=4" Lensed Adjustable Accent, Polymer Trim Ring 4LAL1=4" Lensed Adjustable Accent, Self Flanged 4LFC0=Flat Cut Cone, Polymer Trim Ring 4LFC1=Flat Cut Cone, Self Flanged 4LAPIN=4" Pinhole <sup>(6)</sup>	LI=Specular Clear H=Semi-Specular Clear WMH=Warm Haze G=Specular Gold WH=Wheat WHH=Wheat Haze GP=Graphite GPH=Graphite Haze B=Specular Black MW=Matte White	<b>Self-Flanged Only</b> WF=White Painted Flange

Accessories <sup>(16)</sup>				
<b>LGSKT4IP66</b> =IP66 Gasket Kit <sup>(5)</sup>	<b>Transformers</b> H347=347 to 120V Step Down Transformer, 75VA H347200=347 to 120V Step Down Transformer, 200VA	<b>Color Filters</b> F22-20=Red F33-20=Blue F44-20=Green F55-20=Yellow F66-20=Mercury	<b>Dichronic Filters</b> F71-20=Peach F72-20=Amber F73-20=Green F74-20=Medium Blue F75-20=Yellow F76-20=Red F77-20=Dark Blue F78-20=Light Blue F79-20=Neutral Density F80-20=Magenta	<b>Beam-Modifying Lenses</b> LSL-20=Linear Spread Lens OSL-20=Overall Spread Lens DIF-20=Diffused Lens  <b>Louvers</b> LVR-20=Hex Cell Louver  <b>Snoot</b> PLNC-SN-B=Snoot
<b>Bar Hangers</b> HB26=C-channel Bar Hanger, 26" Long, Pair TAA-HB26=Pair C-channel bar hanger, 26" long <sup>(15)</sup> HB50=C-channel Bar Hanger, 50" Long, Pair RMB22=Wood Joist Bar Hanger, 22" Long, Pair	<b>Connected Lighting Systems</b> <sup>(3) (12)</sup> WPST = Field installed WaveLinX Sensor Kit <sup>(13)</sup> WLST = Field installed WaveLinX LITE Sensor Kit <sup>(14)</sup>			

Notes:

- Nominal Lumens will vary depending on selected color, driver and reflector finish.
- Order trim with polymer trim ring (Consult specification sheet for color ordering information and options).
- Not available with Chicago Plenum and requires above ceiling access. Not for use with insulation.
- Pinhole finish standard white with black occlus (omit finish code).
- Required for T-24 compliance with lensed trims.
- Product is marked spacing and must be installed with the following minimum spacing:  
Center to center of adjacent luminaires: 36"  
Center of luminaire to side of building member: 18"  
Minimum overhead clearance: 1/2"

- Not CSA apPROved.
- Includes 30° distribution diffuse lens. Order with LAR15SP upper reflector. Reference ies files for output.
- Use with narrow flood beam forming reflector and 30° tilt.
- DMX fixtures default to full on upon loss of DMX signal.
- Consult dimming guide for performance.
- Refer to system specifications for additional information, features, and benefits. Order either factory installed option or accessory. Use with 0-10V driver.
- WPST = WaveLinX wireless sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with 0-10V only.
- WLST = WaveLinX LITE tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX LITE system specifications)

- Only Product configurations with this designated prefix are built to be compliant with the Trade Agreements Act of 1979 (TAA). Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
- Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
- WPN = WaveLinX PRO wireless node PROvides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only.

## Product Specifications

### Lower Reflector

- Spun 0.050" aluminum.
- Available in a variety of Alzak® and painted finishes.
- Two torsion springs pull trim tight to ceiling.
- Truncated adjustable cut cone allows for full tilt range and flexibility.
- Lensed wall wash PROvides even illumination on vertical surfaces.
- Pinhole includes black oculus to control glare.

### Upper Reflector

- Field interchangeable optics in 15°, 25° or 35° PROvides smooth beam without color separation.
- Media holder fits onto upper reflector and holds up to two lens media.

### Trim Ring

- Self flanged or white polymer trim ring.

### Adjustment Mechanism

- Stable aiming and locking mechanism allows smooth 362° rotation and 40° elevation adjustment.
- Aiming scale enables consistent setting across multiple fixtures.

### Housing

- One piece die cast 1-1/4" deep collar.
- 18 gauge CRS housing is painted matte black to eliminate stray light.
- Housing is toolless top accessible.

### Universal Mounting Bracket

- Accepts 1/2" EMT, C Channel, T bar fasteners and hanger bars.
- PROvides 5" total adjustment.

### Thermal

- Aluminum heat sink conducts heat away from the LED module for optimal performance and longer life.

### LED

- LED system contains a plurality of high brightness white LED's combined with a high reflectance upper reflector PROducing even distribution with no pixilation.
- Lumen output shall not decrease by more than 10% over the minimum life of 55,000 hours (L90 > 55,000 hours).

- Auto resetting, thermally Protected, LED's are turned off when safe operating temperatures are exceeded. Color variation within 3-step MacAdam ellipses.
- D2W™ – dim-to-warm shifts CCT from 3000K to 1850K as fixture dims mimicking halogen sources.

### Driver

- Combination 120-277V 0-10V or 120V trailing edge phase cut driver PROvides flicker free dimming from 100% to 10%.
- Optional 1% 0-10V, Fifth Light, or DMX.
- Driver can be serviced from above or through the aperture.

### Connected Lighting System

Two WaveLinX connected solutions to choose from. Refer to WaveLinX system specifications and application guides for details.

#### WaveLinX PRO Tilemount Sensor Kit

- WaveLinX WPST tilemount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

#### WaveLinX PRO Wireless Node

- WaveLinX PRO wireless node PROvides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only

#### WaveLinX LITE Tilemount Sensor Kit

- WaveLinX LITE WLST tilemount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

#### WaveLinX Tilemount Kits Application

- The WPST and WLST tilemount kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WPST and WLST tilemount kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.

### Code Compliance

- Thermally Protected
- cULus Certified to UL 1598 / C22.2 No. 250.0 suitable for wet locations with downlight; damp location with wall wash and hyperbolic with covered ceiling
- Optional City of Chicago environmental air (CCEA) marking for plenum applications.
- EMI/RFI emissions per FCC 47CFR Part 18 Class B consumer limits.
- 2800 lumen Non-IC rated - Insulation must be kept 3" from top and sides of housing. IC rated up to 1800 lumen.
- RoHS Compliant.
- 2800 lumen and above spacing and must follow spacing requirements.
- Photometric testing completed in accordance with IES LM 79 standards.
- Lumen maintenance PROjections in accordance with IES LM-80-08 and TM-21-11.
- Options to meet Trade Agreements Act requirements

### Warranty

- Five year warranty [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)

## Energy Data

ENERGY DATA	
Sound Rating:	Class A standards
T ambient:	-40 + 40°C
Power Factor:	>0.90
THD:	< 20%

900 Lumen		
	120V	277V
Input Power	13.8W	15.0W
Input Current	0.12A	0.06A
Inrush Current	0.49A	0.85A

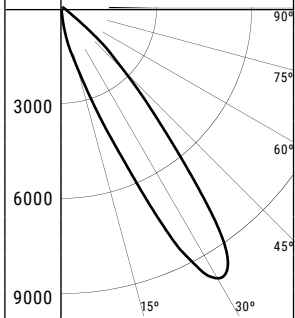


1800 Lumen		
	120V	277V
Input Power	29.1W	29.4W
Input Current	0.24A	0.12A
Inrush Current	0.79A	1.09A

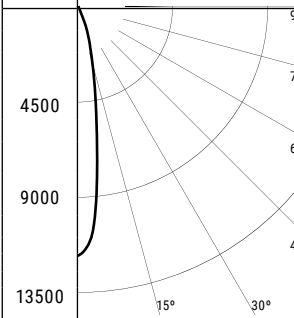

1300 Lumen		
	120V	277V
Input Power	22.9W	22.9W
Input Current	0.19A	0.09A
Inrush Current	0.72A	0.53A

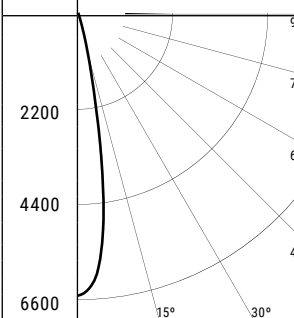

2800 Lumen		
	120V	277V
Input Power	44.5W	44.2W
Input Current	0.37A	0.17A
Inrush Current	1.09A	1.23A

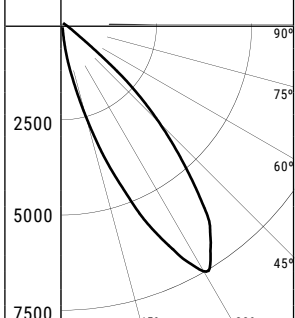


## Photometric Data

 View IES files

Test Number: P170903 Housing: LDA4A18835D010TE Trim: LAR15SP 4LA1 30° Tilt Lumens: 1611 Lm Efficacy: 55.3 Lm/W	<b>CANDLEPOWER DISTRIBUTION</b> <b>Directional</b> 	<b>CONE OF LIGHT</b> Horizontal 					<b>CONE OF LIGHT</b> Vertical 					<b>CANDELA TABLE</b>		<b>ZONAL LUMEN SUMMARY</b>																																																																																																								
		<table border="1"> <thead> <tr> <th>MH</th> <th>FC</th> <th>L</th> <th>W</th> <th>CB</th> </tr> </thead> <tbody> <tr><td>5.5'</td><td>50</td><td>5.9</td><td>3</td><td>3.2</td></tr> <tr><td>7'</td><td>31</td><td>7.6</td><td>3.8</td><td>4</td></tr> <tr><td>8'</td><td>23</td><td>8.7</td><td>4.2</td><td>4.6</td></tr> <tr><td>9'</td><td>19</td><td>9.8</td><td>4.8</td><td>5.2</td></tr> <tr><td>10'</td><td>15</td><td>10.9</td><td>5.4</td><td>5.8</td></tr> <tr><td>12'</td><td>10</td><td>13.1</td><td>6.4</td><td>6.9</td></tr> </tbody> </table>	MH	FC	L	W	CB	5.5'	50	5.9	3	3.2	7'	31	7.6	3.8	4	8'	23	8.7	4.2	4.6	9'	19	9.8	4.8	5.2	10'	15	10.9	5.4	5.8	12'	10	13.1	6.4	6.9	<table border="1"> <thead> <tr> <th>D</th> <th>FC</th> <th>L</th> <th>W</th> <th>CB</th> </tr> </thead> <tbody> <tr><td>1'</td><td>6925</td><td>0.3</td><td>0.2</td><td>1.7</td></tr> <tr><td>2'</td><td>1731</td><td>0.7</td><td>0.6</td><td>3.5</td></tr> <tr><td>3'</td><td>770</td><td>1.2</td><td>1</td><td>5.2</td></tr> <tr><td>4'</td><td>433</td><td>1.5</td><td>1.2</td><td>6.9</td></tr> <tr><td>5'</td><td>277</td><td>1.9</td><td>1.6</td><td>8.7</td></tr> <tr><td>6'</td><td>192</td><td>2.4</td><td>2</td><td>10.4</td></tr> </tbody> </table>	D	FC	L	W	CB	1'	6925	0.3	0.2	1.7	2'	1731	0.7	0.6	3.5	3'	770	1.2	1	5.2	4'	433	1.5	1.2	6.9	5'	277	1.9	1.6	8.7	6'	192	2.4	2	10.4	<table border="1"> <thead> <tr> <th>Degrees Vertical</th> <th>Candela</th> </tr> </thead> <tbody> <tr><td>0</td><td>94</td></tr> <tr><td>5</td><td>420</td></tr> <tr><td>15</td><td>2152</td></tr> <tr><td>25</td><td>7782</td></tr> <tr><td>35</td><td>8815</td></tr> <tr><td>45</td><td>2530</td></tr> <tr><td>55</td><td>115</td></tr> <tr><td>65</td><td>6</td></tr> <tr><td>75</td><td>0</td></tr> <tr><td>85</td><td>0</td></tr> <tr><td>90</td><td>0</td></tr> </tbody> </table>	Degrees Vertical	Candela	0	94	5	420	15	2152	25	7782	35	8815	45	2530	55	115	65	6	75	0	85	0	90	0	<table border="1"> <thead> <tr> <th>Zone</th> <th>Lumens</th> <th>% Fixture</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>714</td><td>44.3</td></tr> <tr><td>0-40</td><td>1329</td><td>82.5</td></tr> <tr><td>0-60</td><td>1604</td><td>99.6</td></tr> <tr><td>0-90</td><td>1611</td><td>100</td></tr> <tr><td>90-180</td><td>0</td><td>0</td></tr> <tr><td>0-180</td><td>1611</td><td>100</td></tr> </tbody> </table>	Zone	Lumens	% Fixture	0-30	714	44.3	0-40	1329	82.5	0-60	1604	99.6	0-90	1611	100	90-180	0	0	0-180
MH	FC	L	W	CB																																																																																																																		
5.5'	50	5.9	3	3.2																																																																																																																		
7'	31	7.6	3.8	4																																																																																																																		
8'	23	8.7	4.2	4.6																																																																																																																		
9'	19	9.8	4.8	5.2																																																																																																																		
10'	15	10.9	5.4	5.8																																																																																																																		
12'	10	13.1	6.4	6.9																																																																																																																		
D	FC	L	W	CB																																																																																																																		
1'	6925	0.3	0.2	1.7																																																																																																																		
2'	1731	0.7	0.6	3.5																																																																																																																		
3'	770	1.2	1	5.2																																																																																																																		
4'	433	1.5	1.2	6.9																																																																																																																		
5'	277	1.9	1.6	8.7																																																																																																																		
6'	192	2.4	2	10.4																																																																																																																		
Degrees Vertical	Candela																																																																																																																					
0	94																																																																																																																					
5	420																																																																																																																					
15	2152																																																																																																																					
25	7782																																																																																																																					
35	8815																																																																																																																					
45	2530																																																																																																																					
55	115																																																																																																																					
65	6																																																																																																																					
75	0																																																																																																																					
85	0																																																																																																																					
90	0																																																																																																																					
Zone	Lumens	% Fixture																																																																																																																				
0-30	714	44.3																																																																																																																				
0-40	1329	82.5																																																																																																																				
0-60	1604	99.6																																																																																																																				
0-90	1611	100																																																																																																																				
90-180	0	0																																																																																																																				
0-180	1611	100																																																																																																																				

Test Number: P170583 Housing: LDA4A18835D010TE Trim: LAR15SP 4LFC1 Lumens: 1910 Lm Efficacy: 65.6 Lm/W SC: 0.32	<b>CANDLEPOWER DISTRIBUTION</b> <b>Downlight</b> 	<b>CONE OF LIGHT</b> 				<b>CANDELA TABLE</b>		<b>ZONAL LUMEN SUMMARY</b>																																																																			
		<table border="1"> <thead> <tr> <th>MH</th> <th>FC</th> <th>L</th> <th>W</th> </tr> </thead> <tbody> <tr><td>5.5'</td><td>400</td><td>1.6</td><td>1.6</td></tr> <tr><td>7'</td><td>247</td><td>2.2</td><td>2.2</td></tr> <tr><td>8'</td><td>189</td><td>2.4</td><td>2.4</td></tr> <tr><td>9'</td><td>149</td><td>2.8</td><td>2.8</td></tr> <tr><td>10'</td><td>121</td><td>3.0</td><td>3.0</td></tr> <tr><td>12'</td><td>84</td><td>3.6</td><td>3.6</td></tr> </tbody> </table>	MH	FC	L	W	5.5'	400	1.6	1.6	7'	247	2.2	2.2	8'	189	2.4	2.4	9'	149	2.8	2.8	10'	121	3.0	3.0	12'	84	3.6	3.6	<table border="1"> <thead> <tr> <th>Degrees Vertical</th> <th>Candela</th> </tr> </thead> <tbody> <tr><td>0</td><td>12099</td></tr> <tr><td>5</td><td>10191</td></tr> <tr><td>15</td><td>2956</td></tr> <tr><td>25</td><td>357</td></tr> <tr><td>35</td><td>18</td></tr> <tr><td>45</td><td>2</td></tr> <tr><td>55</td><td>0</td></tr> <tr><td>65</td><td>0</td></tr> <tr><td>75</td><td>0</td></tr> <tr><td>85</td><td>0</td></tr> <tr><td>90</td><td>0</td></tr> </tbody> </table>	Degrees Vertical	Candela	0	12099	5	10191	15	2956	25	357	35	18	45	2	55	0	65	0	75	0	85	0	90	0	<table border="1"> <thead> <tr> <th>Zone</th> <th>Lumens</th> <th>% Fixture</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>1894</td><td>99.1</td></tr> <tr><td>0-40</td><td>1908</td><td>99.9</td></tr> <tr><td>0-60</td><td>1910</td><td>100</td></tr> <tr><td>0-90</td><td>1910</td><td>100</td></tr> <tr><td>90-180</td><td>0</td><td>0</td></tr> <tr><td>0-180</td><td>1910</td><td>100</td></tr> </tbody> </table>	Zone	Lumens	% Fixture	0-30	1894	99.1	0-40	1908	99.9	0-60	1910	100	0-90	1910	100	90-180	0	0	0-180
MH	FC	L	W																																																																								
5.5'	400	1.6	1.6																																																																								
7'	247	2.2	2.2																																																																								
8'	189	2.4	2.4																																																																								
9'	149	2.8	2.8																																																																								
10'	121	3.0	3.0																																																																								
12'	84	3.6	3.6																																																																								
Degrees Vertical	Candela																																																																										
0	12099																																																																										
5	10191																																																																										
15	2956																																																																										
25	357																																																																										
35	18																																																																										
45	2																																																																										
55	0																																																																										
65	0																																																																										
75	0																																																																										
85	0																																																																										
90	0																																																																										
Zone	Lumens	% Fixture																																																																									
0-30	1894	99.1																																																																									
0-40	1908	99.9																																																																									
0-60	1910	100																																																																									
0-90	1910	100																																																																									
90-180	0	0																																																																									
0-180	1910	100																																																																									


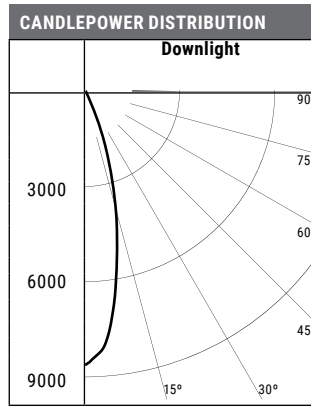
Test Number: P170167 Housing: LDA4A18835D010TE Trim: LAR15SP 4LPIN Lumens: 738 Lm Efficacy: 25.3 Lm/W SC: 0.34	<b>CANDLEPOWER DISTRIBUTION</b> <b>Downlight</b> 	<b>CONE OF LIGHT</b> 				<b>CANDELA TABLE</b>		<b>ZONAL LUMEN SUMMARY</b>																																																																			
		<table border="1"> <thead> <tr> <th>MH</th> <th>FC</th> <th>L</th> <th>W</th> </tr> </thead> <tbody> <tr><td>5.5'</td><td>216</td><td>1.8</td><td>1.8</td></tr> <tr><td>7'</td><td>133</td><td>2.2</td><td>2.2</td></tr> <tr><td>8'</td><td>102</td><td>2.6</td><td>2.6</td></tr> <tr><td>9'</td><td>81</td><td>3</td><td>3</td></tr> <tr><td>10'</td><td>65</td><td>3.2</td><td>3.2</td></tr> <tr><td>12'</td><td>45</td><td>4</td><td>4</td></tr> </tbody> </table>	MH	FC	L	W	5.5'	216	1.8	1.8	7'	133	2.2	2.2	8'	102	2.6	2.6	9'	81	3	3	10'	65	3.2	3.2	12'	45	4	4	<table border="1"> <thead> <tr> <th>Degrees Vertical</th> <th>Candela</th> </tr> </thead> <tbody> <tr><td>0</td><td>6521</td></tr> <tr><td>5</td><td>5842</td></tr> <tr><td>15</td><td>767</td></tr> <tr><td>25</td><td>19</td></tr> <tr><td>35</td><td>1</td></tr> <tr><td>45</td><td>0</td></tr> <tr><td>55</td><td>0</td></tr> <tr><td>65</td><td>0</td></tr> <tr><td>75</td><td>0</td></tr> <tr><td>85</td><td>0</td></tr> <tr><td>90</td><td>0</td></tr> </tbody> </table>	Degrees Vertical	Candela	0	6521	5	5842	15	767	25	19	35	1	45	0	55	0	65	0	75	0	85	0	90	0	<table border="1"> <thead> <tr> <th>Zone</th> <th>Lumens</th> <th>% Fixture</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>737</td><td>99.8</td></tr> <tr><td>0-40</td><td>738</td><td>100</td></tr> <tr><td>0-60</td><td>738</td><td>100</td></tr> <tr><td>0-90</td><td>738</td><td>100</td></tr> <tr><td>90-180</td><td>0</td><td>0</td></tr> <tr><td>0-180</td><td>738</td><td>100</td></tr> </tbody> </table>	Zone	Lumens	% Fixture	0-30	737	99.8	0-40	738	100	0-60	738	100	0-90	738	100	90-180	0	0	0-180
MH	FC	L	W																																																																								
5.5'	216	1.8	1.8																																																																								
7'	133	2.2	2.2																																																																								
8'	102	2.6	2.6																																																																								
9'	81	3	3																																																																								
10'	65	3.2	3.2																																																																								
12'	45	4	4																																																																								
Degrees Vertical	Candela																																																																										
0	6521																																																																										
5	5842																																																																										
15	767																																																																										
25	19																																																																										
35	1																																																																										
45	0																																																																										
55	0																																																																										
65	0																																																																										
75	0																																																																										
85	0																																																																										
90	0																																																																										
Zone	Lumens	% Fixture																																																																									
0-30	737	99.8																																																																									
0-40	738	100																																																																									
0-60	738	100																																																																									
0-90	738	100																																																																									
90-180	0	0																																																																									
0-180	738	100																																																																									

Test Number: P170679 Housing: LDA4A18835D010TE Trim: LAR25NF 4LA1 30° Tilt Lumens: 1750 Lm Efficacy: 60.1 Lm/W	<b>CANDLEPOWER DISTRIBUTION</b> <b>Directional</b> 	<b>CONE OF LIGHT</b> Horizontal 					<b>CONE OF LIGHT</b> Vertical 					<b>CANDELA TABLE</b>		<b>ZONAL LUMEN SUMMARY</b>																																																																																																								
		<table border="1"> <thead> <tr> <th>MH</th> <th>FC</th> <th>L</th> <th>W</th> <th>CB</th> </tr> </thead> <tbody> <tr><td>5.5'</td><td>42</td><td>6.4</td><td>4.2</td><td>3.2</td></tr> <tr><td>7'</td><td>26</td><td>8.1</td><td>5.2</td><td>4.0</td></tr> <tr><td>8'</td><td>20</td><td>9.3</td><td>6.0</td><td>4.6</td></tr> <tr><td>9'</td><td>16</td><td>10.5</td><td>6.8</td><td>5.2</td></tr> <tr><td>10'</td><td>13</td><td>11.6</td><td>7.6</td><td>5.8</td></tr> <tr><td>12'</td><td>9</td><td>14</td><td>9.2</td><td>6.9</td></tr> </tbody> </table>	MH	FC	L	W	CB	5.5'	42	6.4	4.2	3.2	7'	26	8.1	5.2	4.0	8'	20	9.3	6.0	4.6	9'	16	10.5	6.8	5.2	10'	13	11.6	7.6	5.8	12'	9	14	9.2	6.9	<table border="1"> <thead> <tr> <th>D</th> <th>FC</th> <th>L</th> <th>W</th> <th>CB</th> </tr> </thead> <tbody> <tr><td>1'</td><td>5063</td><td>0.4</td><td>0.4</td><td>1.7</td></tr> <tr><td>2'</td><td>1266</td><td>1</td><td>0.8</td><td>3.5</td></tr> <tr><td>3'</td><td>563</td><td>1.5</td><td>1.4</td><td>5.2</td></tr> <tr><td>4'</td><td>316</td><td>2.1</td><td>2</td><td>6.9</td></tr> <tr><td>5'</td><td>203</td><td>2.7</td><td>2.4</td><td>8.7</td></tr> <tr><td>6'</td><td>141</td><td>3.2</td><td>3</td><td>10.4</td></tr> </tbody> </table>	D	FC	L	W	CB	1'	5063	0.4	0.4	1.7	2'	1266	1	0.8	3.5	3'	563	1.5	1.4	5.2	4'	316	2.1	2	6.9	5'	203	2.7	2.4	8.7	6'	141	3.2	3	10.4	<table border="1"> <thead> <tr> <th>Degrees Vertical</th> <th>Candela</th> </tr> </thead> <tbody> <tr><td>0</td><td>116</td></tr> <tr><td>5</td><td>502</td></tr> <tr><td>15</td><td>2876</td></tr> <tr><td>25</td><td>6342</td></tr> <tr><td>35</td><td>6772</td></tr> <tr><td>45</td><td>3335</td></tr> <tr><td>55</td><td>216</td></tr> <tr><td>65</td><td>9</td></tr> <tr><td>75</td><td>0</td></tr> <tr><td>85</td><td>0</td></tr> <tr><td>90</td><td>0</td></tr> </tbody> </table>	Degrees Vertical	Candela	0	116	5	502	15	2876	25	6342	35	6772	45	3335	55	216	65	9	75	0	85	0	90	0	<table border="1"> <thead> <tr> <th>Zone</th> <th>Lumens</th> <th>% Fixture</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>769</td><td>44</td></tr> <tr><td>0-40</td><td>1389</td><td>79.4</td></tr> <tr><td>0-60</td><td>1742</td><td>99.6</td></tr> <tr><td>0-90</td><td>1750</td><td>100</td></tr> <tr><td>90-180</td><td>0</td><td>0</td></tr> <tr><td>0-180</td><td>1750</td><td>100</td></tr> </tbody> </table>	Zone	Lumens	% Fixture	0-30	769	44	0-40	1389	79.4	0-60	1742	99.6	0-90	1750	100	90-180	0	0	0-180
MH	FC	L	W	CB																																																																																																																		
5.5'	42	6.4	4.2	3.2																																																																																																																		
7'	26	8.1	5.2	4.0																																																																																																																		
8'	20	9.3	6.0	4.6																																																																																																																		
9'	16	10.5	6.8	5.2																																																																																																																		
10'	13	11.6	7.6	5.8																																																																																																																		
12'	9	14	9.2	6.9																																																																																																																		
D	FC	L	W	CB																																																																																																																		
1'	5063	0.4	0.4	1.7																																																																																																																		
2'	1266	1	0.8	3.5																																																																																																																		
3'	563	1.5	1.4	5.2																																																																																																																		
4'	316	2.1	2	6.9																																																																																																																		
5'	203	2.7	2.4	8.7																																																																																																																		
6'	141	3.2	3	10.4																																																																																																																		
Degrees Vertical	Candela																																																																																																																					
0	116																																																																																																																					
5	502																																																																																																																					
15	2876																																																																																																																					
25	6342																																																																																																																					
35	6772																																																																																																																					
45	3335																																																																																																																					
55	216																																																																																																																					
65	9																																																																																																																					
75	0																																																																																																																					
85	0																																																																																																																					
90	0																																																																																																																					
Zone	Lumens	% Fixture																																																																																																																				
0-30	769	44																																																																																																																				
0-40	1389	79.4																																																																																																																				
0-60	1742	99.6																																																																																																																				
0-90	1750	100																																																																																																																				
90-180	0	0																																																																																																																				
0-180	1750	100																																																																																																																				


## Photometric Data

View IES files

Test Number	P170615
Housing	LDA4A18835D010TE
Trim	LAR25NF 4LFC1
Lumens	2070 Lm
Efficacy	71.1 Lm/W
SC	0.46

**CONE OF LIGHT**



MH	FC	L	W
5.5'	287	2.4	2.4
7'	177	3.0	3.0
8'	136	3.6	3.6
9'	107	4.0	4.0
10'	87	4.4	4.4
12'	60	5.4	5.4


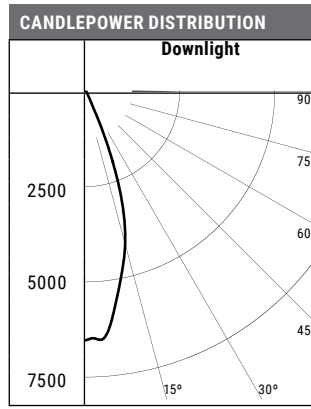
**CANDELA TABLE**

Degrees Vertical	Candela
0	8687
5	7947
15	3834
25	465
35	28
45	3
55	0
65	0
75	0
85	0
90	0


**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Fixture
0-30	2044	98.8
0-40	2067	99.9
0-60	2070	100
0-90	2070	100
90-180	0	0
0-180	2070	100

Test Number	P170647
Housing	LDA4A18835D010TE
Trim	LAR35FL 4LFC1
Lumens	2153 Lm
Efficacy	73.9 Lm/W
SC	0.6

**CONE OF LIGHT**



D	FC	L	W
5.5'	219	3.2	3.2
7'	135	4.0	4.0
8'	104	4.6	4.6
9'	82	5.2	5.2
10'	66	5.8	5.8
12'	46	7	7


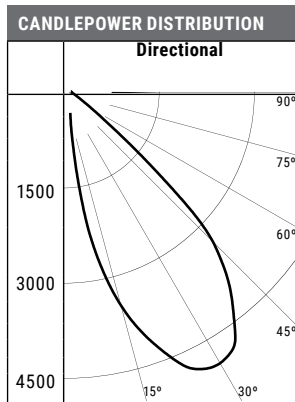
**CANDELA TABLE**

Degrees Vertical	Candela
0	6625
5	6511
15	4203
25	623
35	34
45	2
55	0
65	0
75	0
85	0
90	0


**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Fixture
0-30	2121	98.5
0-40	2150	99.9
0-60	2153	100
0-90	2153	100
90-180	0	0
0-180	2153	100

Test Number	P174896
Housing	LDA4A18835D010TE
Trim	LAR35FL 4LA1 30° Tilt
Lumens	1843 Lm
Efficacy	63.3 Lm/W





**CONE OF LIGHT**  
Horizontal



MH	FC	L	W	CB
5.5'	45	5.3	4.6	3.2
7'	28	6.9	5.8	4
8'	21	7.8	6.8	4.6
9'	17	8.8	7.6	5.2
10'	14	9.8	8.4	5.8
12'	10	11.8	10.2	6.9

**CONE OF LIGHT**  
Vertical



D	FC	L	W	CB
1'	3506	0.5	0.6	1.7
2'	876	1.2	1.2	3.5
3'	390	1.9	1.8	5.2
4'	219	2.5	2.6	6.9
5'	140	3.2	3.2	8.7
6'	97	3.9	3.8	10.4

**CANDELA TABLE**

Degrees Vertical	Candela
0	342
5	1432
15	3794
25	4914
35	4619
45	2960
55	129
65	4
75	0
85	0
90	0

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Fixture
0-30	948	51.4
0-40	1514	82.1
0-60	1837	99.7
0-90	1843	100
90-180	0	0
0-180	1843	100

## Photometric Data

[View IES files](#)

Test Number P170871 Housing LDA4A18835D010TE Trim LAR35FL 4LLWW1 Lumens 1600 Lm Efficacy 54.9 Lm/W	CANDLEPOWER DISTRIBUTION					CONE OF LIGHT					CONE OF LIGHT		CANDELA TABLE		ZONAL LUMEN SUMMARY					
	Directional					Horizontal					Vertical					Degrees Vertical	Candela	Zone	Lu-mens	%Fix- ture
																0	427			
						MH	FC	L	W	CB	D	FC	L	W	CB	5	726	0-30	596	37.2
						5.5'	19.4	6.5	6	3.2	1'	1775	0.6	0.6	1.7	15	1654	0-40	1043	65.2
						7'	12	8.2	7.6	4	2'	444	1.3	1.4	3.5	25	2420	0-60	1556	97.3
						8'	9.2	9.4	8.8	4.6	3'	197	2.0	2.2	5.2	35	2384	0-90	1600	100
						9'	7.2	10.6	9.8	5.2	4'	111	2.7	3.0	6.9	45	1609	90-180	0	0
						10'	5.9	11.8	11	5.8	5'	71	3.5	3.8	8.7	55	551	0-180	1600	100
						12'	4.1	14.2	13.2	6.9	6'	49	4.1	4.6	10.4	65	108			
																75	8			
																85	3			
																90	0			

SINGLE UNIT FOOTCANDLES								MULTIPLE UNIT FOOTCANDLES					
DD	2' FROM WALL (Distance From Fixture Along Wall)							2' FROM WALL (Spacing Between Fixtures)			3' FROM WALL (Spacing Between Fixtures)		
	●	1'	2'	3'	4'	5'	6'	●	2' apart	●	●	3' apart	●
1'	26.7	10.8	1.2	0.1	0	0	0	27.9	21.6	27.9	2.3	1.5	2.3
2'	142.2	70.1	15	2.7	0.5	0.1	0	157.2	140.1	157.2	31.9	26.3	31.9
3'	103.8	66.8	23.4	6.7	1.7	0.4	0.2	127.3	133.6	127.3	69.9	62.3	69.9
4'	55.3	41	19.8	8.1	2.8	0.9	0.4	75.1	82	75.1	64.7	66.1	64.7
5'	28.6	23.1	13.8	7.1	3.2	1.3	0.6	42.4	46.2	42.4	48.1	51.4	48.1
6'	15.6	13.3	9.1	5.5	2.9	1.5	0.8	24.7	26.6	24.7	33.4	36.4	33.4
7'	9.1	8	5.9	4.1	2.5	1.4	0.8	15	16	15	22.7	24.9	22.7
8'	5.6	5	4	2.9	2	1.2	0.8	9.5	10	9.5	15.7	17	15.7
9'	3.6	3.3	2.8	2.1	1.6	1.1	0.7	6.4	6.6	6.4	11	11.8	11
10'	2.4	2.2	1.9	1.6	1.2	0.9	0.7	4.4	4.5	4.4	7.8	8.4	7.8

## EM MULTIPLIER DATA

LUMENS	EM MULTIPLIER	
	7	14
900/1000	0.50	0.99
1300/1500	0.29	0.57
1800/2000	0.22	0.44
2800/3000	0.16	0.32

## Connected Solutions

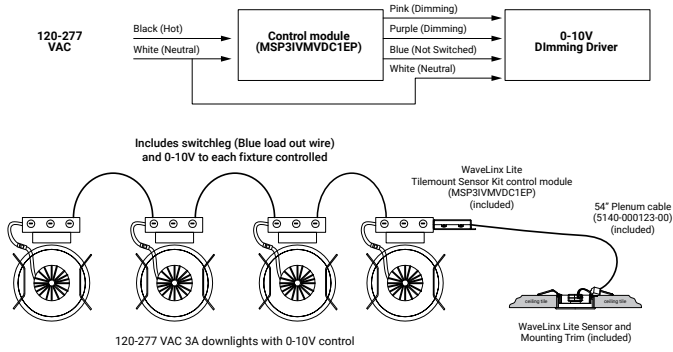
### WaveLinx LITE - WLST Tilemount Sensor



- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per PROject site (WaveLinx LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details



#### WaveLinx LITE WLST Tilemount Wiring Diagram



#### WaveLinx LITE Bluetooth Enabled System



### WaveLinx PRO Wireless – WPST Tilemount Sensor



- WaveLinx PRO Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Along Offices or Entire Building Network Installations

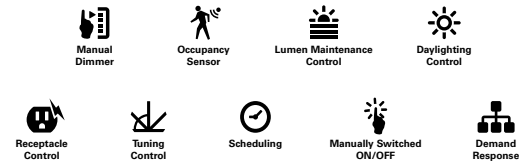
**Downlights with tilemount sensor**  
Highly efficient LED fixtures

**WaveLinx Area Controller**  
PROvides centralized coordination of multiple area control options

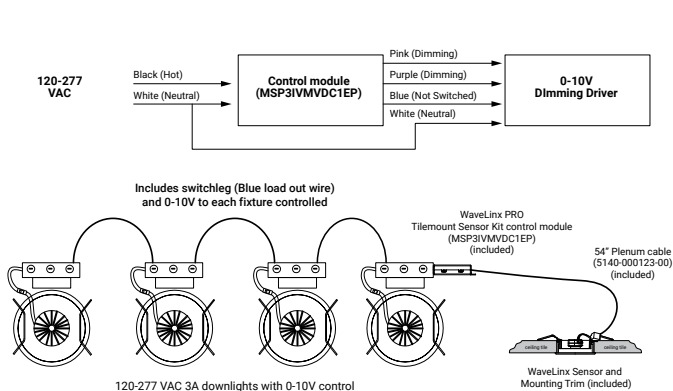
**Wireless Wall Station/Receptacle**  
PROvides customized wireless control of each area

**Mobile Applications**  
PROvides personalized, local control from a tablet or smartphone

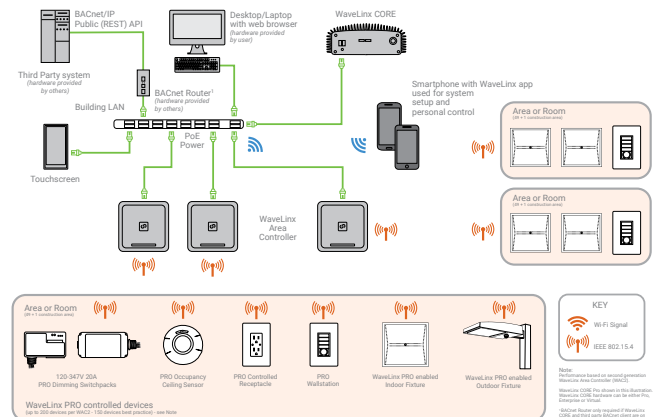
#### WaveLinx mobile app settings



#### WaveLinx PRO WPST Tilemount Wiring Diagram



#### WaveLinx CORE Building Management Integration



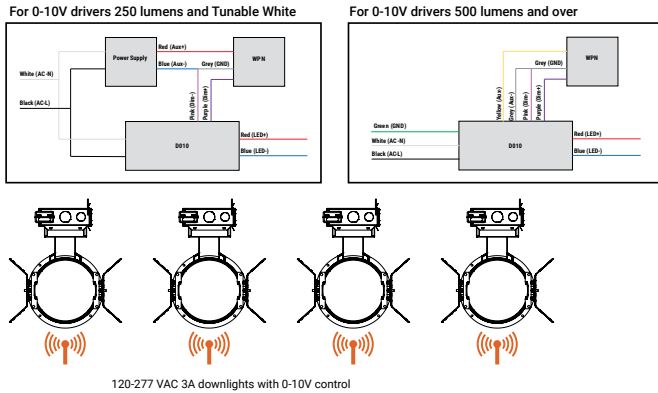
## Connected Solutions

### WaveLinx PRO Wireless Node - WPN

- WaveLinx Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with WaveLinx Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations



### WaveLinx PRO Wireless Node (WPN) Wiring Diagram



### WaveLinx CORE Building Management Integration

