



LED **SWIFTY**
360° LED DOWNLIGHTS

DOWNLIGHT SERIES



TABLE OF CONTENTS

DGD G1 - Downlight GimbalDirect.....03

DGR G1 - Downlight Gimbal Regress.....04

DGS G1 - Downlight Gimbal Swivel.....05

DGW G1 - Downlight Gimbal Wafer.....06

DRF G1 - Downlight Regress.....07

ACCESSORIES.....08

EMA-DH20T-UNV-110

DE 3/4/6/8/10R HOUSING

DT GR 4R W / DT GR 6R W



DGD G1

DESIGN XP

LED Downlight - Gimbal Direct Gen 1

2" Round
3" Round
4" Round

360° Rotation



30° Tilt



CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT SELECTABLE	Voltage
DGD 2R 4 D38 G19FSK	2" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	400 Lm	6 W	2700K - 5000K	120V
DGD 2R 4 D20 G19FSK	2" Round LED Direct Gimbal Downlight - 20° Beam Angle - 90 CRI	400 Lm	6 W	2700K - 5000K	120V
DGD 3R 6 D38 G19FSK	3" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	600 Lm	9 W	2700K - 5000K	120V
DGD 4R 10 D38 G19FS	4" Round LED Direct Gimbal Downlight - 38° Beam Angle - 90 CRI	1050 Lm	15 W	2700K - 5000K	120V

ORDERING GUIDE

Luminaire Type	Size	Lumen Output	Optic	Generation	Voltage	Selectable CCT and CRI	Finish	Options - Emergency Backup	Accessories (Ships separately)
• DGD LED Downlight - Direct Gimbal	• 2R 2" ROUND • 3R 3" ROUND • 4R 4" ROUND	• 4 400 LUMENS / 6W • 6 600 LUMENS / 9W • 10 1,050 LUMENS / 15W	• D20 20° Beam Angle • D38 38° Beam Angle • D38 38° Beam Angle	• G1 1st Generation	• BLANK 120V	• 9FSK 90 CRI - 2700K/ 3000K/ 3500K/ 4000K/ 5000K	• BLANK Matte white	• BLANK No backup. • EMA-DH20T-UNV-110 Emergency battery backup.	• BLANK No accessories. • DE 3/4/6/8/10R HOUSING ENew Construction Universal Housing. • DT GR 4R W 4" Goof Ring for 4" Downlights only.



DGR G1

DESIGN XP

LED Downlight - Gimbal Regress Gen 1

2" Round
3" Round
4" Round

360° Rotation



30° Tilt



CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT SELECTABLE	Voltage
DGR 2R 4 D38 G1 9FSK	2" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	400 Lm	6 W	2700K - 5000K	120V
DGR 2R 4 D20 G1 9FSK	2" Round LED Regress Gimbal Downlight - 20° Beam Angle - 90 CRI	400 Lm	6 W	2700K - 5000K	120V
DGR 3R 6 D38 G1 9FSK	3" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	600 Lm	9 W	2700K - 5000K	120V
DGR 4R 10 D38 G1 9FS	4" Round LED Regress Gimbal Downlight - 38° Beam Angle - 90 CRI	1050 Lm	15 W	2700K - 5000K	120V

ORDERING GUIDE

Luminaire Type	Size	Lumen Output	Optic	Generation	Voltage	Selectable CCT & CRI	Finish	Options - Emergency Backup	Accessories (Ship Separately)
• DGR LED Downlight - Regress Gimbal	• 2R 2" ROUND • 3R 3" ROUND • 4R 4" ROUND	• 4 400 LUMENS / 6W • 6 600 LUMENS / 9W • 10 1,050 LUMENS / 15W	• D20 20° Beam Angle • D38 38° Beam Angle • D38 38° Beam Angle	• G1 1st Generation	• BLANK 120V	• 9FSK 90 CRI - 2700K/ 3000K/ 3500K/ 4000K/ 5000K	• BLANK MATTE WHITE	• BLANK No backup. • EMA-DH20T-UNV-110 Emergency backup battery.	• BLANK No accessories. • DE 3/4/6/8/10R HOUSING New Construction Universal Housing. • DT GR 4R W 4" Goof Ring for 4" Downlight Only.



DGS G1

DESIGN XP

LED Downlight - Gimbal Swivel Gen 1

4" Round

360° Rotation



90° Tilt




CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT SELECTABLE	Voltage
DGS 4R 9 D38 G1 9FSK	4" Round LED Swivel Gimbal Downlight - 38° Beam Angle - 90 CRI	900 Lm	12 W	2700K - 5000K	120V

ORDER GUIDE

Luminaire Type	Size	Lumen Output	Optics	Generation	Voltage	Selectable CCT and CRI	Finish	Options - Emergency Backup	Accessories (Ships Separately)
• DGS Gimbal Swivel Downlight	• 4R 4" ROUND	• 9 900 Lumens / 12W	• D38 38° Beam Angle	• G1 1st Generation	• BLANK 120V	• 9FSK 90 CRI - 2700K 3000K 3500K 4000K 5000K	• BLANK Matte White	• BLANK No backup. • EMA-DH20T- UNV-110 Emergency battery backup	• BLANK No accessories. • DE 3/4/6/8/10R HOUSING ENew Construction Universal Housing. • DT GR 4R W 4" Goof Ring for 4" Downlights.

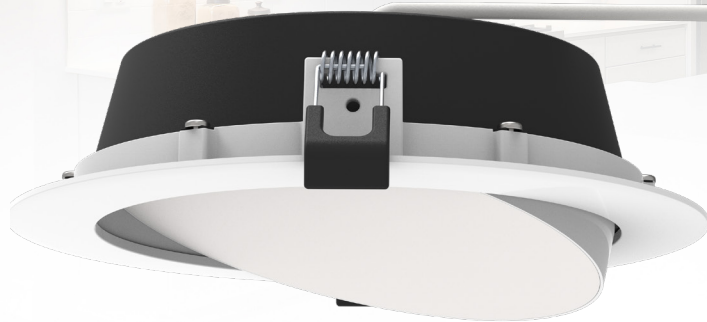

DGW G1 DESIGN XP

LED Downlight - Gimbal Wafer Gen 1

4" Round
6" Round

180° Rotation



25° Tilt



CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT SELECTABLE	Voltage
DGW 4R 8 G19FSK	4" Round LED Wafer Gimbal Downlight - 110° Beam Angle	750 Lm	10 W	2700K - 5000K	120V
DGW 6R 10 G19FSK	6" Round LED Wafer Gimbal Downlight - 110° Beam Angle	1,000 Lm	13 W	2700K - 5000K	120V

ORDERING GUIDE

Luminaire Type	Size	Lumen Output	Optic	Generation	Voltage	Selectable CCT and CRI	Finish	Options - Emergency Backup	Accessories (Ships Separately)
• DGW LED Downlight - Gimbal Wafer	• 4R 4" ROUND • 6R 6" ROUND	• 8 750 LUMENS / 10W • 10 1,000 LUMENS / 13W	• BLANK 110° Beam Angle	• G1 1st Generation	• BLANK 120V	• 9FSK 90 CRI - 2700K/ 3000K/ 3500K/ 4000K/ 5000K	• BLANK MATTE WHITE	• BLANK No backup. • EMA-DH20T- UNV-110 Emergency battery backup	• BLANK No accessories. • DE 3/4/6/8/10R HOUSING ENew Construction Universal Housing. • DT GR 4R W 4" Goof Ring for 4" Downlights only. • DT GR 6R W 6" Goof Ring for 6" Downlights only.



DRF G1

DESIGN XP

LED Downlight - Regress Gen 1



DRF 3BR
3" Round Baffle Flange



DRF 3BS
3" Square Baffle Flange



DRF 3SR
3" Round Smooth Flange


CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT SELECTABLE	Voltage
DRF 3BR 7 D38 G1 9FSK	3" Round LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	650 Lm	9 W	2700K - 5000K	120V
DRF 3BR 10 D38 G1 9FSK	3" Round LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	1050 Lm	15 W	2700K - 5000K	120V
DRF 3BS 7 D38 G1 9FSK	3" Square LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	650 Lm	9 W	2700K - 5000K	120V
DRF 3BS 10 D38 G1 9FSK	3" Square LED Regress Downlight - Baffle - 38° Beam Angle - 90 CRI	1050 Lm	15 W	2700K - 5000K	120V
DRF 3SR 7 D38 G1 9FSK	3" Round LED Regress Downlight - Smooth - 38° Beam Angle - 90 CRI	650 Lm	9 W	2700K - 5000K	120V
DRF 3SR 10 D38 G1 9FSK	3" Round LED Regress Downlight - Smooth - 38° Beam Angle - 90 CRI	1050 Lm	15 W	2700K - 5000K	120V

ORDERING GUIDE

Luminaire Type	Design	Lumen Output	Optic	Generation	Voltage	Selectable CCT & CRI	Finish	Options- Emergency Backup	Accessories (Ships Separately)
• DRF LED Downlight - Regress	• 3BR 3" ROUND Baffle • 3SR 3" ROUND Smooth • 3BS 3" SQUARE Baffle	• 7 650 LUMENS / 9W • 10 1050 LUMENS / 15W	• D38 38° Beam Angle	• G1 1st Generation	• BLANK 120V	• 9FSK 90 CRI - 2700K/ 3000K/ 3500K/ 4000K/ 5000K	• BLANK Matte white	• BLANK No backup. • EMA-DH20T-UNV-110 Emergency backup battery.	• DE 3/4/6/8/10R HOUSING New Construction Universal Housing.

ACCESSORIES

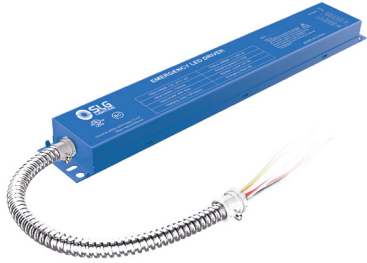

EMA-DH20T-UNV-110
(Emergency Backup)

Product Specifications			
Input Voltage	100-277V AC, 50/60Hz	Output Voltage	110V AC
Input Current (Max)	100mA	Warranty	5 Years
Input Power (Max)	7 W	Output Power	20 W
Emergency Time	90 Minutes	Battery Type	Lithium
Charging Time	≥ 24 Hours	Ambient Temp	5°C - 50°C (41°F - 122°F)



DE 3/4/6/8/10R HOUSING



DT GR 4R W / DT GR 6R W
(Goof Ring)

*Only available for 4" and 6" downlights.



Stocking Distributor Friendly



Your experience matters.



Sales: (713) 389 - 5680 or sales@slgus.com
 SLG Sports Lighting: (903) 407-0555 or chandler.hancock@slgus.com
 Marketing: marketing@slgus.com