



SOURCE[®]
LIGHTING BY CAST



LANDSCAPE LIGHTING

We believe in providing our customers with a broad range of lighting design tools, options, and solutions.




Source Lighting® brings you professional grade landscape lighting made of durable brass. Offering both integrated and drop-in LED technology and backed by CAST, the world's most durable outdoor lighting.

BLUETOOTH DIRECTIONAL SPOT LIGHTS

Our Bluetooth LED RGBW Adjustable Color Spot and Wall Wash Lights have a sturdy, beautiful aged brass finish and can achieve multiple color, lumen, and scene settings. All controlled using your smart phone and our NEW IMPROVED APP!

Bluetooth LED RGBW Adjustable Color Spot Light (SBLBTC1)

INTEGRATED



Description:

- Three times brighter color than comparable MR-16 products
- Fixed 36° beam angle, high impact glass lens, Integrated LED lamp
- IP65 rated for harsh environments, Moisture relief valves
- Set-N-Stake® Quick Link Composite with brass insert stake mount
- Operating range -30° to +45° C
- CCT range tunable from 2500K (@76.8CRI) to 6500K (@83.2CRI)
- RGB Options: Unlimited color wheel options, preset colors: red, green, blue, and white, dimmable from 5% to 100% all color options, blue tooth communication


Unit **REQUIRES** the use of **Range Extender (SBLBTR)** below.

| BLUETOOTH RGBW SPOTLIGHT Electrical and Photometric Test Results | | | | | | | |
|--|--------------------|----------|------------|---------|---------|--------|-------|
| Fixture SBLBTC1 | Color Setup in App | Flux | Beam Angle | Voltage | Current | Power | VA |
| *Testing done at full power | | [Lumens] | [°] | [VAC] | [A] | [W] | |
| Source Lighting SBLBTC1 Spotlight | 2700° | 342 | 36° | 12.0 | 1.7 | 10.300 | 14.07 |
| Source Lighting SBLBTC1 Spotlight | Green | 249 | 36° | 12.0 | 1.2 | 10.700 | 14.75 |
| Source Lighting SBLBTC1 Spotlight | Red | 133 | 36° | 12.0 | 1.1 | 9.260 | 12.86 |
| Source Lighting SBLBTC1 Spotlight | Blue | 47 | 36° | 12.0 | 1.2 | 10.300 | 14.07 |
| Source Lighting SBLBTC1 Spotlight | Indigo | 92 | 36° | 12.0 | 1.1 | 9.670 | 13.28 |

Bluetooth LED RGBW Adjustable Color Wall Wash (SWLBTC1)

INTEGRATED

NEW!

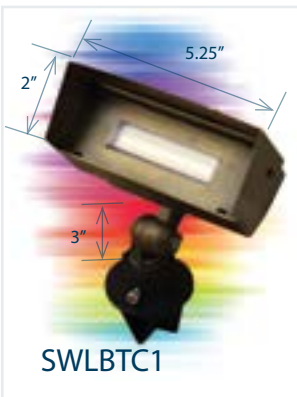

Description:

- NEW advanced antenna increases bluetooth range
- Adjustable glare shield, 20° x 80° wide light distribution
- Set-N-Stake® Quick Link Composite with brass insert stake mount
- Operating range -30° to +45° C
- Fully tunable white light from 2500K (@76.8CRI) to 6000K (@83.2CRI)
- RGB Options: Unlimited color wheel options, preset colors: red, green, blue, and white, dimmable from 5% to 100% all color options, blue tooth communication
- IP65 rated for harsh environments

Unit **REQUIRES** the use of **Range Extender (SBLBTR)** below.

| BLUETOOTH RGBW WALL WASH Electrical and Photometric Test Results | | | | |
|--|---------------|------------------|--------------|-------------|
| COLOR | VOLTAGE INPUT | CONSUMED WATTAGE | LIGHT OUTPUT | DOMINANT WL |
| Red | 12V AC/DC | 10.37W | 191.05LM | 625.2nm |
| Green | 12V AC/DC | 10.31W | 316.88LM | 529.3nm |
| Blue | 12V AC/DC | 10.7W | 121.43LM | 458.4nm |
| White Color 2700K | 12V AC/DC | 10.04W | 528.37LM | |

Bluetooth Range Extender (SBLBTR)

Description:

- Increases operating range & effectiveness of bluetooth/smartphone communication
- Place 1-10 feet from farthest fixtures
- Use multiple range extenders spaced 20 feet apart for full coverage

Unit **REQUIRED** for the use of our Bluetooth Adjustable Color Spot (SBLBTC1) and Wash Light (SBLWTC1) above.

SBLBTR



DIRECTIONAL SPOT LIGHTS

COMPACT, VERSATILE, POWERFUL REMOTE FIXTURES




SOURCE
LIGHTING BY CAST

Remote Multi Lumen SpotLight with Field Replaceable Beam Spread Optics (SBML36R)

Hand-Held IR Remote! Chose 80Lm, 130Lm, 190Lm, or 250Lm

Description:

- **Remote Controlled**
- Aged bronze finish with adjustable knuckle, brass body
- Light engine features four remote adjustable lumen levels (1: 80Lm, 2: 130Lm, 3: 190Lm, 4: 250Lm)
- Field changeable beam spread optics option* (requires optics and SBMLTOOL on pg. 3)
- 5' #18-2 lead wire
- Includes composite with brass insert Set-N-Stake®
- 4.2 Watt, 12-15 Volts
- 10 year warranty



SBMLR (pg.3)

One Remote FREE with Each Case of Six Fixtures*

*2 AAA Batteries Not Included

*Optional Replacement Optics

15° - SMLO15

24° - SMLO24

60° - SMLO60

80° - SMLO80

and Replacement Tool (SBMLTOOL)

Sold Separately, See Page 3

(One Replacement Tool provided in each case of 6 fixtures purchased free.)

Select lumen level 1-4 with the push of a button!

US PATENTED PRODUCT: [9,115,857] [9,140,414] [9,316,379] [9,541,263] [9,945,538]



Remote Multi Lumen Wall Wash (SWML3R)

Hand-Held IR Remote! Pick 93Lm, 214Lm, 426Lm, 592Lm, or 687Lm

Description:

- **Remote Controlled**
- Brass body & knuckle with bronze finish
- 20° X 80° wall wash
- Five remote adjustable lumen levels
- Wide IR receiver window for optimal communication
- Fixture blinks to confirm lumen setting 1, 2, 3, 4, & 5
- Provided with adjustable glare shroud
- 2700K color temperature >80 CRI, L-70, 50,000 hours LED
- Operating range from -30°C to +45°C
- 6' 105° rated #18-2 lead wire
- Includes composite with brass insert Set-N-Stake®
- 10 year warranty

Choose lumen level 1-5 easily and quickly!

*Light Engine features five remote adjustable lumen levels:

1: 93Lm

2: 214Lm

3: 426Lm

4: 593Lm

5: 687Lm

*Remote Sold Separately, See Page 3



SWMLR (pg.3)

One Remote FREE with Each Case of Three Fixtures*

*2 AAA Batteries Not Included



SWML3R - IR Lumen Level Controlled Wall Wash

ELECTRICAL & PHOTOMETRIC TEST RESULTS

VOLTAGE RANGE 12V - 15V AC/DC

Actual Field Performance may vary by +/-5%

| Power Setting | Input Voltage | Current Input | Consumed Wattage | Power Factor | Volt Amp | Light Output Lumens | CCT | CRI |
|---------------|---------------|---------------|------------------|--------------|----------|---------------------|--------|-----|
| #1 | 12V AC/DC | .170A | 1.5 | 0.8 | 1.875 | 93 | 2700°K | >80 |
| #2 | 12V AC/DC | 0.333 | 3 | 0.8 | 3.75 | 214 | 2700°K | >80 |
| #3 | 12V AC/DC | 0.66 | 6 | 0.8 | 7.5 | 426 | 2700°K | >80 |
| #4 | 12V AC/DC | 0.945 | 9 | 0.8 | 11.25 | 592 | 2700°K | >80 |
| #5 | 12V AC/DC | 1.113 | 11 | 0.8 | 13.75 | 687 | 2700°K | >80 |

CAST Lighting, LLC., 1120-A Goffle Road, Hawthorne, NJ 07506

Phone: 973.423.2303 - Toll Free: 800.914.CAST - Email: info@cast-lighting.com


www.cast-lighting.com/source

DIRECTIONAL SPOT LIGHTS



Multi Lumen SBML Series Spot Light with Field Replaceable Optics

4 Easy-to-Change Lumen Settings! Change Optics Right on the Job!

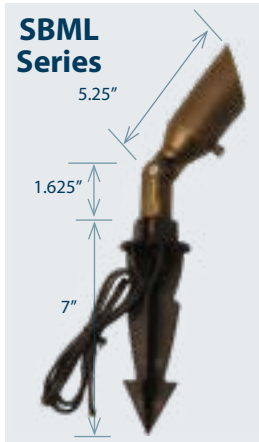

Description:

- Brass fixture
- Aged brass finish with adjustable knuckle
- Light engine features four field adjustable lumen levels (80Lm, 130Lm, 190Lm, and 250Lm)
- Field changeable optics (15°, 24°, 36°, 60°, or 80°)
- 5' #18-2 lead wire
- Includes composite with brass insert Set-N-Stake®
- 4.2 Watt, 12-15 Volts
- 10 year warranty



Models Available:

- **SBML15:** 15° Narrow Beam
- **SBML24:** 24° Medium Beam
- **SBML36:** 36° Wide Beam
- **SBML363K:** 36° Wide Beam, 3000K
- **SBML60:** 60° X-Wide Beam
- **SBMLW:** 80° Wash Light

***Replacement Optics and Replacement Tool (SBMLTOOL) Sold Separately (see below)**
(One Replacement Tool provided in each case of 6 fixtures purchased free.)

| Source SBML Series: Multi Lumen Spotlight with Field Changeable Optics (SBML36R, SBML15, SBML24, SBML36, SBML363K, SBML60) | | | | | | | | | | | | |
|--|---------------|---------------|---------------------|------------------|--------------|-----------------------------------|--------|-------------------|--------|----------|--------|-----|
| Voltage Range 12V - 15V AC/DC Actual Results May Vary + or - 5% | | | | | | LIGHT OUTPUT LUMENS / BEAM SPREAD | | | | | | |
| Replacement Optic Part # | | | | | | SMLO15 | SMLO24 | SMLO36 (Incl.) | SMLO60 | SMLO80 | | |
| Halogen Equivalent | Power Setting | Voltage Input | Current /Amps Input | Consumed Wattage | Power Factor | 15° | 24° | 36° | 60° | 80° WASH | CCT | CRI |
| 35W | #4, 4.2W | 12.0 VAC | 0.452 A | 3.02 | 0.784 | 260 Lm | 255 Lm | 250 Lm | 215 Lm | 210 Lm | 2800°K | 85 |
| 30W | #3, 3.0W | 12.0 VAC | 0.329 A | 2.25 | 0.767 | 200 Lm | 195 Lm | 190 Lm | 163 Lm | 160 Lm | 2800°K | 85 |
| 20W | #2, 2.0W | 12.0 VAC | 0.216 A | 1.5 | 0.748 | 138 Lm | 135 Lm | 130 Lm | 130 Lm | 128 Lm | 2800°K | 85 |
| 10W | #1, 1.0W | 12.0 VAC | 0.120 A | 0.77 | 0.722 | 86 Lm | 85 Lm | 80 Lm | 70 Lm | 68 Lm | 2800°K | 85 |
| Replaceable Optic Part # (Requires #SBMLTOOL, 1 piece included per 6 case.) | | | | | | SMLO15 | SMLO24 | SMLO36 (Included) | SMLO60 | SMLO80 | | |

Hand-Held IR Lumen Adjustment Remote (SBMLR)

Lumen level remote for use with SBML36R (pg. 2)

- One provided FREE with each case of six fixtures.
- Additional remotes available for purchase.
- Requires 2 AAA batteries, not included.



SBMLR

Gutter Mount Bracket



Gutter Mount Bracket (SMGB1):

- Allows sturdy installation of uplights in gutters
- Works with all CAST products (Landscape & Source)
- Stainless steel with bronze finish
- 1/2" NPT thread
- Quick release
- Mounting screws not included
- For Set-N-Stake® mount use XCBPTLTA adaptor (sold separately)

Replacement Optics and Tool for SBML Series Multi Lumen Spotlight (see above)

Easy-to-Change Optics!



SBMLTOOL

Replacement Optic Part Number:

- **SMLO15:** 15° Narrow Beam
- **SMLO24:** 24° Medium Beam
- **SMLO36:** 36° Wide Beam
- **SMLO60:** 60° X-Wide Beam
- **SMLO80:** 80° Wash Light

Optic Replacement Tool (SBMLTOOL)

Sold Separately:

- Easily replace optics right on the job
- One tool is included FREE with each case of 6 fixtures purchased
- Also requires 5/16 allen key OR 9/16 socket OR 14mm socket for lock ring removal

CAST Lighting, LLC., 1120-A Goffle Road, Hawthorne, NJ 07506

Phone: 973.423.2303 – Toll Free: 800.914.CAST – Email: info@cast-lighting.com

www.cast-lighting.com/source

DIRECTIONAL SPOT LIGHTS



SOURCE
LIGHTING BY CAST

MR-16 Spot Light (SBL20)

Description:

- Brass fixture
- Aged brass finish with adjustable knuckle assembly
- 2 inch shroud, MR-16 ceramic socket with lamp clip
- Molded borosilicate convex lens
- 25 foot lead wire #16 AWG brown with 18 inch daisy chain whip
- Brown plastic ground stake included
- Do not exceed 90 watts, 7.5 amps on #16 gauge wire
- Fixture housing lifetime warranty
- MR-16 lamp sold separately, see page 9



Achieve These Beam Spreads in the SBL20 by Using Source Lighting LED MR-16 Lamps!




***COLOR CODED MR-16 Lamps Sold Separately See Page 9**



MR-16 Economy Spot Light (SBL10)

Description:

- Brass fixture
- Aged brass finish with adjustable knuckle assembly
- 2 inch shroud, with clear glass lens
- MR-16 socket with lamp clip (lamp not included)
- 3 ft lead wire
- Brown plastic stake included
- Lifetime warranty on fixture housing

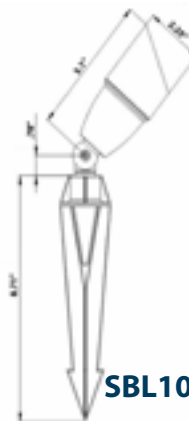

***COLOR CODED MR-16 Lamps Sold Separately See Page 9**



Integrated LED Spot Lights

4.5 Watt (SSPK45)

Description:

- 4.5 Watt, 6.0 VA, 12-15V, 35° beam
- 450 Lumen
- Integrated 3 LED Nichia Chip
- 3000K Clear glass lens,
- 35° beam angle
- Custom PMMA optic
- IP66 rated
- 5 year warranty on electronics



8.5 Watt (SSPK85)

Description:

- 8.5 Watt, 11 VA, 12-15V, 35° beam
- 850 Lumen
- Integrated 9 LED Nichia Chip
- 3000K Clear glass lens,
- 35° beam angle
- Custom PMMA optic
- IP66 rated
- 5 year warranty on electronics



PATH & AREA



Use these Path/Area Lights for lighting pathways, planting beds, and other areas. These lights have both frosted and clear lenses included. All hats, stem assemblies and lamps are sold separately.



Path/Area Hats



SAL100

SAL150

Description (SAL100):

- Brass fixture
- Aged brass finish
- Frosted & clear polycarbonate lenses included with rubber gaskets
- Stem assemblies sold separately
- Fixture housing lifetime warranty
- Lamp #SLBP250L sold separately (see pg. 10)

Description (SAL150):

- Brass fixture
- Aged brass finish
- Frosted & clear polycarbonate lenses included with rubber gaskets
- Stem assemblies sold separately
- Fixture housing lifetime warranty
- Lamp #SLBP250L sold separately (see pg. 10)

Stem Assemblies



12"

18"

SALSTEM12
SALSTEM18

Description (SALSTEM12, SALSTEM18):

- Brass fixture/aged brass finish
- Ceramic bi-pin socket GY 6.35
- 25 ft. lead wire #16 AWG brown with 18in daisy chain whip
- Brown plastic ground stake included
- Lamp #SLBP250L sold separately (see pg. 10)
- Area light hats sold separately
- Lifetime warranty on fixture housing

***Lamps
for Path
Fixtures Sold
Separately
See Page 10
SLBP250L**



Bollard Path Light



SBOL1

Description (SBOL1):

- Body is brass with aged bronze finish
- 18" H X 1.77" OD
- Integrated CREE 2700 LED chip, fully sealed LED chamber
- Field adjustable beam angle from fully visible LED to completely shrouded LED to meet any lumen setting requirement
- Fully repairable
- 5 ft. lead #18-2 wire
- Large talon stake included

INTEGRATED

"L" Top Path Light



SAL300

Description (SAL300):

- Body is brass with aged bronze finish
- 21" X 5.5" (1" Square)
- Ceramic bi-pin socket GY 6.35
- 5 ft. lead wire #18 AWG brown
- Brown plastic ground stake included
- Lamp #SLBP250L sold separately (see pg. 11)
- Lifetime warranty on fixture housing

INTEGRATED



WELL/RECESSED/GROUND



SOURCE
LIGHTING BY CAST

In-Ground Well Light



SGL20

Description (SGL20):

- Solid brass body
- Aged brass finish
- Shroud with clear convex glass lens
- Lead wire 5' 18AWG
- MR-16 bi-pin porcelain socket (lamp not included)
- Recommended lamp: Source Lighting MR-16 lamp
- Fixture housing lifetime warranty



***MR-16 Lamp Sold Separately**
See Page 9 for options

Recessed Up Light (8 Watt)



SRUL8

Description (SRUL8):

- 5.5" top OD, Height 5", 8W, 10.6 VA, 12-15V
- Integrated CREE COB LED 3000K, clear glass lens
- 35° reflector, 15° fixed tilt angle
- Die cast aluminum body & aluminum sleeve
- Trim brushed 316 stainless steel
- Provided with 5' #18-2 pigtail, IP67 rated, 5 year warranty

INTEGRATED

Recessed Mini Narrow Spot Up Light (1 Watt)



SRULNS

Description (SRULNS):

- 1-7/8" Top Flange Diameter, Body 1.32" OD, Overall length 2.7"
- 1W, 1.45 VA, 12-15V, 10° narrow spot with black mounting polycarbonate sleeve
- Integrated 1 LED Nichia Chip, 3000K, clear glass lens
- Fixture 304, trim 316 stainless steel, polished matt top surface finish
- Provided with 36" #18-2 lead wire, IP67 rated, 5 year warranty

INTEGRATED

Recessed Mini Wash Up Light (.5 Watt)



SRULW

Description (SRULW):

- 1-7/8" Top Flange Diameter, Body 1.32" OD, Overall length 2.7"
- .5W, .7 VA, 12-15V, wash light with black mounting polycarbonate sleeve
- Integrated 1 LED Nichia Chip, 3000K, frosted glass lens
- Fixture 304, trim 316 stainless steel, polished matt top surface finish
- Provided with 36" #18-2 lead wire, IP67 rated, 5 year warranty

INTEGRATED

Recessed Mini Wall Two Sided Wash Light (3 Watt)



SRDWL

Description (SRDWL):

- 4.4" OD top flange diameter, body 1.70" OD, overall length 2.6"
- 3W, 3.89 VA, 12-15V, **two sided wash light**
- Integrated 1 LED Nichia Chip, 3000K, frosted lens
- Fixture 304, trim 316 stainless steel, polished matt top surface finish
- Provided with 36" #18-2 lead wire
- IP67 rated, 5 year warranty

INTEGRATED

Recessed Micro Up Light (.5 Watt)



SRULMS90

Description (SRULMS90):

- **Includes two flanges**, one for 10° narrow spot and one for 90° angled throw
- Integrated 1 LED Nichia Chip 3000K
- Brass with rubbed bronze finish, clear glass lenses
- Flanges 1.6" OD, body 1" OD x 2.5" H
- Provided with 5' #18-2 lead wire
- IP67 rated, 5 year warranty

NEW!

INTEGRATED

WALL, DECK, & WASH



Engineered Wall Lights

4 Easy-to-Change Lumen Settings!

ALL WALL LIGHTS ARE INTEGRATED

Engineered Wall Light with Adjustable Lumen Output (SEWL60ML)



SEWL60ML

Features:

- Dimensions: 6" L x .7" W x 1" H
- 2700 CCT warm white
- FOUR LIGHT LEVELS AT 100%, 70%, 50%, 30%
- 2.5W and **80 lumen at 100%**
 - 70% power setting = 1.75W and **55 lumen**
 - 50% power setting = 1.25W and **40 lumen**
 - 30% power setting = .75W and **25 lumen**
- Rated hours: 50,000, 9-24 volt operating range
- 80 CRI
- Ambient operating temperature: -40°C to +50°C

Description:

- Aged brass finish
- Frosted lens with 8-chip LED
- Detachable body for easy repair
- 48 in. #18 AWG lead wire with quick connect
- Can be used with the Set-N-Stone® (CSIS)
- LED & housing 10 Year Warranty
- ETL approval

Rounded Edge LED (SEWL60R)



SEWL60R

Features:

- Dimensions: 6" L x .7" W x 1" H
- 8 Chip, **120 Lm** integrated LED strip
- 3W, 120° beam (wash) spread
- 2700°K warm white, 10V-24V AC/DC range
- CRI: RA>80, halogen equivalent 20W
- Rated Hours, 30,000
- Ambient operating temperature: -40°C to +50°C

Description:

- Aged brass finish
- Brass "L" mounting bracket fits Set-N-Stone® module
- Flexible bracket for up and down adjustments
- Easily removable light module
- Includes 10 ft. lead wire #16 AWG brown
- LED & housing: 10 Year Warranty

Square Edge LED (SEWL45S)



SEWL45S

Features:

- Dimensions: 4.5" L x .8" W x .65" H
- 4 Chip, **60 Lm** integrated LED strip
- 1.1W 120° beam (wash) spread
- 2700°K warm white, 10V-15V AC/DC range
- CRI: RA>80, halogen equivalent 10W
- Rated hours, 30,000
- Ambient operating temperature: -40°C to +50°C

Description

- Aged brass finish
- Stainless mounting bracket with aged brass finish
- Easily removable light module
- Includes 10 ft. lead wire #16 AWG brown
- LED & housing: 10 Year Warranty

Square Edge LED (SEWL70S)



SEWL70S

Features:

- Dimensions: 7" L x .8" W x .65 H
- 8 Chip, **120 Lm** integrated LED strip
- 3W, 120° beam (wash) spread
- 2700° warm white, 10V-15V AC/DC range
- CRI: RA>80, halogen equivalent 20W
- Rated hours, 30,000
- Ambient operating temperature: -40°C to +50°C

Description

- Aged brass finish
- Stainless mounting bracket with aged brass finish
- Easily removable light module
- Includes 10 ft. lead wire #16 AWG brown
- LED & housing: 10 Year Warranty

Porch / Sconce MR-16 Up & Down Light (SPL1)



SPL1

Features:

- Aged brass finish
- Uses two MR-16 lamps, max 35 watts (not included)
- 12V - 24V outdoor light
- 25 foot #16-2 lead wire
- 2.5" overall depth round x 7" high body
- 2" wide x 3.5" rectangular mounting base, mounting hardware not included

WALL, DECK, & WASH



SOURCE
LIGHTING BY CAST

Deck Light (SDL20)



SDL20

Features:

- Solid brass body, 3.5" OD
- Aged brass finish
- Frosted glass lens, G-4 bi-pin socket (lamp not included)
- Lead wire 5' 16AWG
- Recommended lamp: Source Lighting LED lamp SLBP250L (see page 10)
- Fixture housing lifetime warranty



Lamp Sold Separately, see page 10

Mini Flood Wash Light (SFL10)



SFL10

Features:

- Solid brass body
- Aged brass finish
- Standard plastic stake
- Thumbscrew for easy knuckle adjustment
- Lead wire 5' 16AWG
- Frosted lens, G-4 bi-pin socket (lamp not included)
- Recommended lamp: Source Lighting LED lamp: SLBP250L (see page 10)
- Fixture housing has lifetime warranty



Lamp Sold Separately, see page 10

Large Flood/Wash Light (SFL20)



SFL20

Features:

- Solid brass body
- Aged brass finish
- Large standard plastic stake
- Thumbscrew for easy knuckle adjustment
- Lead wire 5' 16AWG
- Frosted lens, MR-16 bi-pin socket, lamp not included (see page 9)
- Recommended lamps: MR-16 80° XX Wide Beam LED: SLMR162XXW27 or SLMR164XXW27
- Fixture housing has lifetime warranty



Lamp Sold Separately, see page 9


SPECIALTY LIGHTS

Bamboo Lights (SBBL36 & SBBL44)



Features:

- Available in two heights, 36" and 44"
- 11/16" diameter with 12" long illuminated frosted polycarbonate cylinder top
- Integrated 1LED Nichia Chip, anti-glare diffuser
- Aluminum stem with black polyester coated finish
- 2 watts, 2.6 VA, 12V AC/DC, beam angle 120
- 36" #18-2 lead wire, IP65 rated
- 5 year warranty

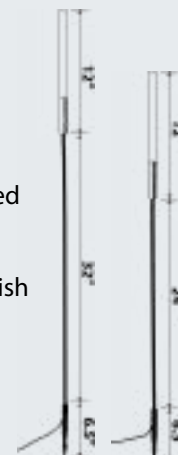

NO GLARE!

INTEGRATED

Underwater Light (SUL20)



Features:

- Solid brass body, aged brass finish
- Water tight seal
- Clear tempered glass lens
- No shroud
- Lead wire 10' 18AWG
- MR-16 bi-pin porcelain socket (lamp not included)
- Recommended lamps: MR-16 LED Lamps (see page 9)



Lamp Sold Separately, see page 9

LED MR-16 LAMPS

Color-Coded & Engraved for Easy Identification




ENGRAVED FOR EASY IDENTIFICATION!



SOURCE
LIGHTING BY CAST

| Lamp Code | Beam from Fixture | | Halogen Equiv. | Lamp Body Color Code | Voltage Input | Color Temp. CCT/CRI | Amps | Power Factor | Volt Amp (to size Trans.) | Factory Lumen | Lumen Output Enclosed Fixture | Rated Hrs. |
|--------------|-------------------|-----|----------------|----------------------|---------------|---------------------|-------|--------------|---------------------------|---------------|-------------------------------|------------|
| | | | | | | | | | | | | |
| SLMR166XXW27 | XX-Wide | 80° | 75 Watt | WHITE 6 Watt | 10-24 VAC | 2700°K/ 83 CRI | 0.706 | 0.717 | 8.49 | 720 | 213 | 50,000 |
| SLMR166XW27 | X-Wide | 55° | | | | | 0.706 | 0.717 | 8.49 | | 440 | |
| SLMR166W27 | Wide | 40° | | | | | 0.706 | 0.717 | 8.49 | | 527 | |
| SLMR166M27 | Medium | 30° | | | | | 0.706 | 0.717 | 8.49 | | 575 | |
| SLMR166N27 | Narrow | 20° | | | | | 0.706 | 0.717 | 8.49 | | 559 | |
| SLMR166XW30 | X-Wide | 55° | | | | 3000°K/ 83 CRI | 0.762 | 0.681 | 9.16 | | 534 | |
| SLMR166W30 | Wide | 40° | | | | 0.745 | 0.677 | 9.0 | 557 | | | |
| SLMR165XXW27 | XX-Wide | 80° | 50 Watt | BLACK 5 Watt | 10-24 VAC | 2700°K/ 83 CRI | 0.542 | 0.7 | 6.56 | 540 | 175 | 50,000 |
| SLMR165XW27 | X-Wide | 55° | | | | | 0.542 | 0.7 | 6.56 | | 392 | |
| SLMR165W27 | Wide | 40° | | | | | 0.542 | 0.7 | 6.56 | | 419 | |
| SLMR165M27 | Medium | 30° | | | | | 0.542 | 0.7 | 6.56 | | 421 | |
| SLMR165N27 | Narrow | 20° | | | | | 0.542 | 0.7 | 6.56 | | 381 | |
| SLMR165XW30 | X-Wide | 55° | | | | 3000°K/ 83 CRI | 0.671 | 0.658 | 7.45 | | 426 | |
| SLMR165W30 | Wide | 40° | | | | 0.608 | 0.658 | 7.34 | 456 | | | |
| SLMR164XXW27 | XX-Wide | 80° | 35 Watt | BLUE 4 Watt | 10-24 VAC | 2700°K/ 83 CRI | 0.387 | 0.691 | 4.67 | 390 | 199 | 50,000 |
| SLMR164XW27 | X-Wide | 55° | | | | | 0.387 | 0.691 | 4.67 | | 299 | |
| SLMR164W27 | Wide | 40° | | | | | 0.387 | 0.691 | 4.67 | | 304 | |
| SLMR164M27 | Medium | 30° | | | | | 0.387 | 0.691 | 4.67 | | 305 | |
| SLMR164N27 | Narrow | 20° | | | | | 0.387 | 0.691 | 4.67 | | 267 | |
| SLMR164XW30 | X-Wide | 55° | | | | 3000°K/ 83 CRI | 0.435 | 0.637 | 6.0 | | 310 | |
| SLMR164W30 | Wide | 40° | | | | 0.435 | 0.65 | 5.26 | 322 | | | |
| SLMR162XXW27 | XX-Wide | 80° | 20 Watt | GREEN 2 Watt | 10-24 VAC | 2700°K/ 83 CRI | 0.236 | 0.664 | 2.83 | 300 | 128 | 50,000 |
| SLMR162XW27 | X-Wide | 55° | | | | | 0.236 | 0.664 | 2.83 | | 183 | |
| SLMR162W27 | Wide | 40° | | | | | 0.236 | 0.664 | 2.83 | | 189 | |
| SLMR162M27 | Medium | 30° | | | | | 0.236 | 0.664 | 2.83 | | 193 | |
| SLMR162N27 | Narrow | 20° | | | | | 0.236 | 0.664 | 2.83 | | 167 | |
| SLMR162XW30 | X-Wide | 55° | | | | 3000°K/ 83 CRI | 0.249 | 0.64 | 3.0 | | 197 | |
| SLMR162W30 | Wide | 40° | | | | 0.23 | 0.66 | 3.0 | 196 | | | |
| SLMR161XXW27 | XX-Wide | 80° | 10 Watt | RED 1 Watt | 10-24 VAC | 2700°K/ 83 CRI | 0.139 | 0.63 | 1.69 | 240 | 74 | 50,000 |
| SLMR161XW27 | X-Wide | 55° | | | | | 0.139 | 0.63 | 1.69 | | 106 | |
| SLMR161W27 | Wide | 40° | | | | | 0.139 | 0.63 | 1.69 | | 104 | |

MINI LED LAMPS



SLBP250L

Description (SLBP250L):

- GY6.35 Bi-Pin Base LED
- 2.5 Watts, 9 - 20 Volt operating range
 - 250 Lumen, Color Temp. 2750°K
 - IP67 Rated, 25,000 Hrs.

Can be used with these Products:




Source Path/ Area Lights
(SAL100, SAL150, SALSTEM12, SALSTEM18)


*all pieces sold separately

Source Deck Light (SDL20)

Source Mini Flood Wash Light (SFL10)



Classic Mini China Hat
CCH5CB (with Bi-Pin Socket)
CCH5LED1 (original non-integrated)

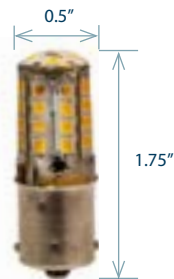

SLSCB250L

Description (SLSCB250L):

- Single Contact Bayonet LED
- 2.5 Watts, 9 - 20 Volt operating range
 - 250 Lumen, Color Temp. 2750°K
 - IP67 Rated, 25,000 Hrs.

Can be used with these Products:

LANDSCAPE



Classic Mini China Hat
CCH5CB (with SCB Socket)
CCH5LED1 (original non-integrated)



SL3156250L

Description (SL3156250L):

- 3156 S8 Wedge Base LED
- 2.5 Watts, 9 - 20 Volt operating range
 - 250 Lumen, Color Temp. 2750°K
 - IP67 Rated, 25,000 Hrs.

Can be used with these Products:

LANDSCAPE



Classic Path Lights

CCH13CB, CCH1CB, CCH2CB, CMU13CB, CMU1CB, CMU2CB, CNO13CB, CNO1CB, CSA1CB
Manufactured After July 2007



SL921T5200L

Description (SL921T5200L):

- 921 T5 Wedge Base LED
- 2.5 Watts, 9 - 15 Volt operating range
 - 200 Lumen, Color Temp. 2750°K
 - IP67 Rated, 25,000 Hrs.

Can be used with these Products:

LANDSCAPE



Classic Deck, Niche, & Engineered Wall Lights

CDL1CB, CDL2CB, CNL1CB, CEWL5CB, & CEWL6CB



SOURCE[®]
LIGHTING BY CAST

Expanding Your Lighting Solutions



www.cast-lighting.com/source

Phone: 973.423.2303 – Toll Free: 800.914.CAST – Email: info@cast-lighting.com

Copyright 2022, CAST Lighting, Hawthorne, NJ 07506. Patents Pending.

All rights reserved. Images and text may not be reproduced in any form without the written permission of CAST Lighting, LLC
Cover photo courtesy of Mike Cresci, Full Moon Lightscaping, Maramora, NJ, @fullmoonlightscaping | www.fullmoonlightscaping.com
Back cover photo courtesy of Andy Mulder, Mulder Maintenance and Services, Crown Point, IN, @mulderoutdoors | www.mmsnwi.com
SLB-8.2022