





### Features & Benefits

- Intense and powerful point source for critical applications
- Less than 1 square inch for small luminaires such as landscape, pathway, steplight, pendants, or chandeliers
- Constant chromaticity across beam angles
- Includes option for standard lenses from Fraen® or Ledil®
- Protective transparent coating
- Patented intelligent thermal design uses metal core board (MCPCB)
- Includes mounting holes for mechanical attachment and pre-wired leads
- Easily configured into existing and new luminaires
- Available in a variety of color temperatures
- Can be used to meet the requirements of CA Title 24, ENERGY STAR® and other green initiatives

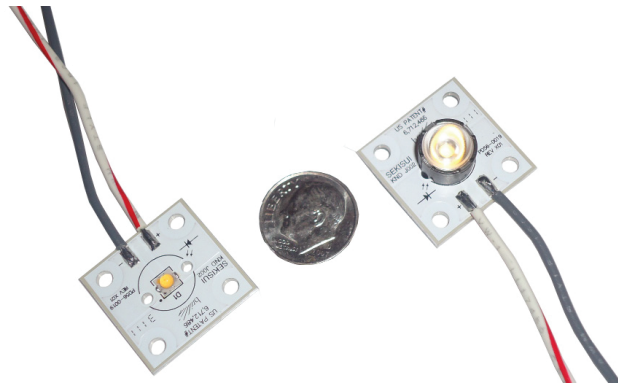

### Physical Dimensions

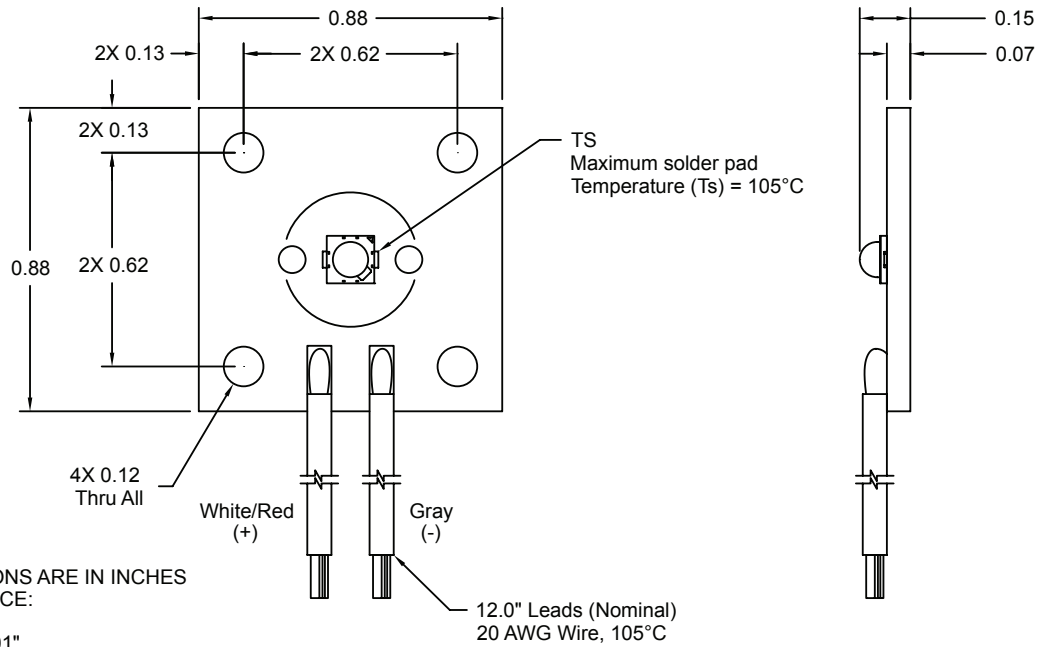

FB-01CK

Part Number	Correlated Color Temp. <sup>(1)</sup> (Kelvin)	Light Output <sup>(1)</sup> (Lumens)	Efficacy <sup>(1)</sup> (Lumens per Watt)	CRI <sup>(1)</sup>
FB-01CK-2700	2700	see graph	see graph	80
FB-01CK-4000	4000	see graph	see graph	80

<sup>1</sup>Nominal value when used with compatible Brillia LED driver and proper heatsink



LED Module