



# 1130A/B-VCOB RIPON SERIES

LED

EPA  
1.21 (ft<sup>2</sup>)  
WEIGHT  
25 LBS

7 YEAR  
WARRANTY

LUMEN  
RANGE  
3,590 to  
7,130

LIFE SPAN  
L70  
MINIMUM  
100,000  
HOURS

UL LISTED

CLICK  
FOR FAQ'S

JOB NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

MEMO \_\_\_\_\_

## BUILD A PART NUMBER

ORDERING EXAMPLE: **PT-1130A-5P-VCOB-4L40TS-MDLO3-A-PEC-FHD/4212FP4-188/BKT**

Mounting Config.	Fixture	Fitter	LED	CCT	Type	Driver	Lens	Option Control Receptacle	Option Control	Option Fuse	Option GFI	Option Terminal Block	Option House Side Shield	Arm See Arm Spec Sheets	Pole See Pole Spec Sheets	Finish

### Mounting Configuration

(Click here to link to mounting configuration specification page)

- 1W      • 2A      • 3A90      • 1AM
- PT      • 2A90      • 3APT      • 2AM
- 1A      • 2APT      • 4A      • 450PB
- 1APT    • 3A      • 4APT

W = Wall Mount    PT = Post Top    A = Arm Mount    AM = Arm Mid-Mount    PB = Pier Base

### Fixture

- 1130A                      • 1130B

### Fitter

- 5P                      • 993                      • BD5                      • C2097
- 990                    • 994                    • BD7
- 991                    • 995                    • OL3
- 992                    • BD4                    • OL4

### LED

- VCOB-4L

### CCT - Color Temperature (K)

- 27(00)    • 30(00)    • 35(00)    • 40(00)    • 50(00)

### Type

- TS (Symmetric)                      • TA (Asymmetric)

### Driver

- MDLO2 (120V-277V, 250mA)
- MDLO3 (120V-277V, 350mA)
- MDLO5 (120V-277V, 500mA)
- MDHO2 (347V-480V, 250mA)
- MDHO3 (347V-480V, 350mA)
- MDHO5 (347V-480V, 500mA)

### Lens

- A (Textured Acrylic)
- P (Textured Poly)
- WA (White Textured Acrylic)
- WP (White Textured Poly)

### Options (Click here to view accessories sheet)

- R<sup>1</sup> 3-Pin control receptacle only
- R5<sup>1</sup> 5-Pin control receptacle only
- R7<sup>1</sup> 7-Pin control receptacle only
- PE<sup>2</sup> Twist-Lock Photocontrol (120v-277v)
- PE3<sup>2</sup> Twist-Lock Photocontrol (347v)
- PE4<sup>2</sup> Twist-Lock Photocontrol (480v)

- SC<sup>2</sup> Shorting Cap
- PEC Electronic Button Photocontrol (120v-277v)
- PEC4 Electronic Button Photocontrol (480v)
- FHD<sup>3</sup> Double Fuse and Holder
- GFI<sup>1</sup> 15A Duplex GFI for Utility Fitter
- TB<sup>1</sup> Terminal Block
- HSS<sup>4</sup> 120° House Side Shield

<sup>1</sup> For 900 series utility fitter only.

<sup>2</sup> Requires control receptacle.

<sup>3</sup> Ships loose for installation in base.

<sup>4</sup> For use with "TA" distribution type only.

### Arm (Click here to link to arm specification page)

See Arms & Wall Brackets specification sheets.

- 50    • 70    • 480    • 6236    • TA    • BA
- 478    • 80    • 55    • 579    • TASCRC    • 779

### Pole (Click here to link to pole specification page)

See Pole specification sheets.

### Finish (Click here to view paint finish sheet)

#### Standard Finishes<sup>5</sup>

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

<sup>5</sup> Smooth finishes are available upon request

#### Custom Finishes<sup>6</sup>

- OI Old Iron
- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

<sup>6</sup> Custom colors require upcharge.

#### Sternberg Select Finishes

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

## Specifications

### Fixture

The luminaire shall feature a fully cast aluminum decorative cage surrounding the acorn. The cage shall consist of a ring with 16 raised panels and 4 slender "Y" shaped supports. An aluminum roof is hinged to the ring for internal access, it is gasketed to resist bug entry and the lens is sealed and weatherproofed with neoprene u-channel. The acorn globe shall be made of vandal resistant textured polycarbonate or dent resistant (DR) textured acrylic and shall be appointed with a cast aluminum decorative finial. The luminaire shall be U.L. listed in U.S. and Canada.

### Fitter - Standard

The fitter shall be heavy wall cast aluminum, 356 alloy for high tensile strength. It shall have an 8-1/2" inside diameter opening to attach to the 8" neck of the acorn globe. When ordered with a Sternberg aluminum pole, the fitter shall be welded to the pole top or tenon for safety and to ensure the fixture will be plumb, secure and level over the life of the installation. The fitter shall have a one-piece ring bug gasket to resist insect penetration into lamp assembly.

### 900 Series Utility Fitter Option

The fitter shall be heavy wall cast aluminum, 360 die cast alloy for high tensile strength. It shall have a 9-1/4" inside diameter opening to attach to the 8" neck of the acorn globe. It shall have a hinged, tool-less entry door that provides open access to all of the components. The 900 series shall have an optional terminal block for ease of wiring, an optional Twist-Lock Photocontrol receptacle, an optional single GFCI outlet for auxiliary power needs. The top mounted driver mounting plate shall be cast aluminum and provide tool-less removal from the housing using 2 finger latches. The fitter shall have a one-piece ring gasket to resist insect penetration into globe assembly. When supplied with GFCI receptacle a hole will be provided for cord and plug installation with the access door closed. When cord and plug is not

See next page

# 1130A/B-VCOB RIPON SERIES

LED

in use a filler plug will be provided and shall be tethered to the fitter for easy recovery and installation.

## LED's

The luminaire shall use high output, high brightness LED's, consisting of a two piece assembly complete with Chip on Board (COB) LED component and COB holder frame mounted to vertical heat sinks. The LED's and printed circuit boards shall be 100% recyclable; they shall also be protected from moisture and corrosion by a conformal coating. They shall not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. The LED life rating data shall be determined in accordance with IESNA LM-80. The High Performance white LED's will have a life expectancy of approximately 100,000 hours with not less than 70% of original brightness (lumen maintenance), rated at 25°C. The High Brightness, High Output LED's shall be 4000K (2700K, 3000K, 3500K or 5000K option) color temperature with a minimum CRI of 70. Consult factory for custom color CCT. The luminaire shall have a minimum \_\_\_\_\_ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F).

## Optics

The luminaire shall be provided with individual, molded silicone refractor type optics applied to each COB (Chip On Board) LED assembly.

The optic shall be at least 92% efficient while providing superior thermal, UV and impact resistance for the COB assembly. The optic helps efficiently shape and distribute the light while minimizing up-light. The luminaire shall provide Symmetric and Asymmetric light distribution. Testing shall be done in accordance with IESNA LM-79.

## Electronic Drivers

The LED driver shall be U.L. Recognized. It shall be securely mounted inside the fixture, for optimized performance and longevity. It shall be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections and fixture installation. It shall have overload, overheat and short circuit protection, and have a DC voltage output, constant current design, 50/60HZ. It shall be supplied with line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It shall be a high efficiency driver with a THD less than 20% and a high power factor greater than .9. It shall be dimming capable using a 0-10v signal, consult factory for more information.

## Lens

Materials include DR Acrylic or Polycarbonate. An injection molding process adds textured surface for glare mitigation, even wall thickness and impact resistance.

## Photocontrols

**Button Style:** The photocontrol shall be

mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on with a 5-10 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years. See pole spec sheet for pole mounted version.

**Twist-Lock Style:** The photocontrol shall be mounted in the utility fitter and pre-wired to driver. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years.

## Warranty

Seven-year limited warranty. See product and finish warranty guide for details.

## Finish

Refer to website for details.

## Performance

LIGHT SOURCE	TS LUMENS	EFFICACY (LPW)	TA LUMENS	EFFICACY (LPW)	WATTAGE
4L40T_-MDL05	7130	95.1	7015	93.5	75
4L30T_-MDL05	6905	92.1	6795	90.6	75
4L27T_-MDL05	6280	83.7	6175	82.3	75
4L40T_-MDL03	5595	99.9	5505	98.3	56
4L30T_-MDL03	5420	96.8	5330	95.2	56
4L27T_-MDL03	4925	87.9	4845	86.5	56
4L40T_-MDL02	4150	103.8	4075	101.9	40
4L30T_-MDL02	4020	100.5	3945	98.6	40
4L27T_-MDL02	3655	91.4	3590	89.8	40




**SternbergLighting**

ESTABLISHED 1923

800-621-3376  
555 Lawrence Ave., Roselle, IL 60172  
info@sternberglighting.com  
www.sternberglighting.com

## Fixtures

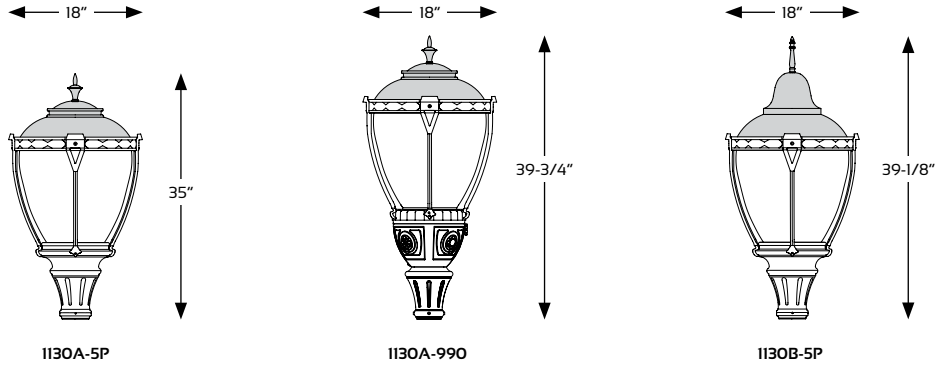


## Fitters

10-1/8" W  
10-3/8" H




**5P**  
Fits 3" OD  
x 3" tall  
tenon/pole

10-1/8" W  
10-1/8" H




**BD4**  
Fits 4" OD  
x 5" tall  
tenon/pole

10-1/8" W  
10-1/4" H




**BD5**  
Fits 5" OD  
x 6" tall  
tenon/pole

10-1/8" W  
11-3/4" H




**BD7**  
Fits 7" OD  
x 1" tall  
tenon/pole

10-1/2" W  
15-3/4" H




**990**  
Fits 3" OD  
x 3" tall  
tenon/pole  
**994**  
Fits 4" OD  
x 3" tall  
tenon/pole

10-1/2" W  
13-1/8" H




**991**  
Fits 3" OD  
x 3" tall  
tenon/pole

10-1/2" W  
13-1/8" H



**992**  
Fits 3" OD  
x 3" tall  
tenon/pole

10-1/2" W  
15-3/4" H




**993**  
Fits 3" OD  
x 3" tall  
tenon/pole  
**995**  
Fits 4" OD  
x 3" tall  
tenon/pole

10-1/2" W  
11-3/8" H



**OL3**  
Fits 3" OD  
x 3" tall  
tenon/pole  
**OL4**  
Fits 4" OD  
x 3" tall  
tenon/pole

10" W  
3-1/4" H



**C2097**  
Fits 7" OD  
x 1" tall  
tenon/pole