



1200 FORT WAYNE SERIES

ORNAMENTAL POLE

DIMENSIONS
18-5/8" Ø
44" TALL

5 YEAR WARRANTY



UL LISTED



ETL LISTED



CLICK FOR FAQ'S



JOB NAME _____

FIXTURE TYPE _____

MEMO _____

BUILD A PART NUMBER

ORDERING EXAMPLE: 1214FP5-.188-BCC-GFILPIUC-SH/BKT

Base Model	Height	Shaft	Wall Thickness	Post Center Cap	Option Burial	Option Photocell	Option Ground Fault Breaker	Option Flag Pole Holder	Option Banner Arms	Option Planter Arms	Option Sign Arms	Option Speaker Hub	Option Sign Bracket	Option Steel Wreath Hook	Finish

Base Model

- 12

Height (in feet)

- 10 • 12 • 14 • 16 • 18 • 20

Shaft

- T5: 5"-3" Tapered Smooth
- T6: 6"-3" Tapered Smooth
- T64: 6"-4" Tapered Smooth
- T54: 5"-4" Tapered Smooth
- P5: 5" Straight Smooth
- P6: 6" Straight Smooth
- FP5: 5" Straight Fluted
- FP6: 6" Straight Fluted
- OCT6: 6" Straight Octagonal

¹ Not available in .125 wall.
² Only available in .250 wall.

Wall Thickness

- .125: 1/8" Wall Thickness
- .188: 3/16" Wall Thickness
- .250: 1/4" Wall Thickness

Post Center Cap (if required)

(Click here to view post cap sheet)

- BCC • FCC • SCC • TFCC
- SSCC • RCC • PCC

Options (Click here to view accessories sheet)

- DB4 Direct Burial mounting style pole, with 4' direct burial section (or advise other length)
- HXB Helix Base mounting style pole
- PCD Electronic Button Photocontrol, mounted on an access door (120v-277v)
- PCD4 Electronic Button Photocontrol, mounted on an access door (480v)
- GFIIUC 15 Amp duplex GFCI receptacles with a standard in-use cover

- GFILPIUC 15 Amp duplex GFCI receptacles with a low-profile in-use cover
- GFIIIB 15 Amp duplex GFCI receptacle installed in pole base, includes mouse hole on access door for wire access
- GFIB Remote Ground Fault Breaker installed in pole base (for use with NON-GFCI receptacles)
- FH Cast Aluminum flag holder mount, for use with 1" diameter flag pole
- SBA Single Banner Arm, "PM" style mount
- DBA Double Banner Arms, "PM" style mount
- SBAR Single Banner Arm and Ring, for triangle banners, "PM" style mount
- HSBA Single Banner Arm, HUB mount style mount
- HDBA Double Banner Arms, HUB mount style mount
- BDBA6 Double Banner Arms, Break-Away style, to break with 60MPH wind gust
- BDBA9 Double Banner Arms, Break-Away style, to break with 90MPH wind gust
- C5SBA Single Banner Arm, Clamp-Style mount, for 5" diameter poles
- C5DBA Double Banner Arms at 180°, Clamp-Style mount, for 5" diameter poles
- DHPA Double Hooked Planter Arm
- SHPA Single Hooked Planter Arm
- DSPA Double Stepped Planter Arm
- SSPA Single Stepped Planter Arm
- PA478 Cast aluminum decorative planter arm
- SA78 Small cast aluminum decorative sign arm, with 24" long channel for blade sign by others
- SA478 Large cast aluminum decorative sign arm, with 24" long channel for blade sign by others
- SABA Banner arm style sign arm, with 24" long channel for blade sign by others

- SH Female threaded speaker hub, advise thread size
- SB Sign Bracket, vertically mounted on pole shaft
- WHK Steel wreath hook

Finish (Click here to view paint finish sheet)

Standard Finishes³

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

³ Smooth finishes are available upon request.

Custom Finishes⁴

- CM Custom Match
- OI Old Iron
- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

⁴ Custom colors require upcharge.

Sternberg Select Finishes

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

Specifications

Construction

The one piece base is made of heavy wall 356 alloy cast aluminum with a 7/8" thick floor cast as an integral part of the base. The high tensile aluminum shaft shall be double circumferentially welded internally and externally to the base for added strength.

See next page



SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

800-621-3376
555 Lawrence Ave., Roselle, IL 60172
info@sternberglighting.com
www.sternberglighting.com

1200 FORT WAYNE SERIES

ORNAMENTAL POLE

Tenon

Standard tenon size to be 3" OD x 3" tall. Consult factory for additional sizes.

Shaft

The **straight smooth shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

The **tapered smooth shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition.

The **straight octagonal shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition.

Installation

Four 3/4" bolts diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage, they shall be mounted in a 14" bolt circle. A door shall be


provided for wiring and anchor bolt access. It shall be secured with stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

Warranty

Five-year limited warranty. See product and finish warranty guide for details.

Finish

Refer to website for details.

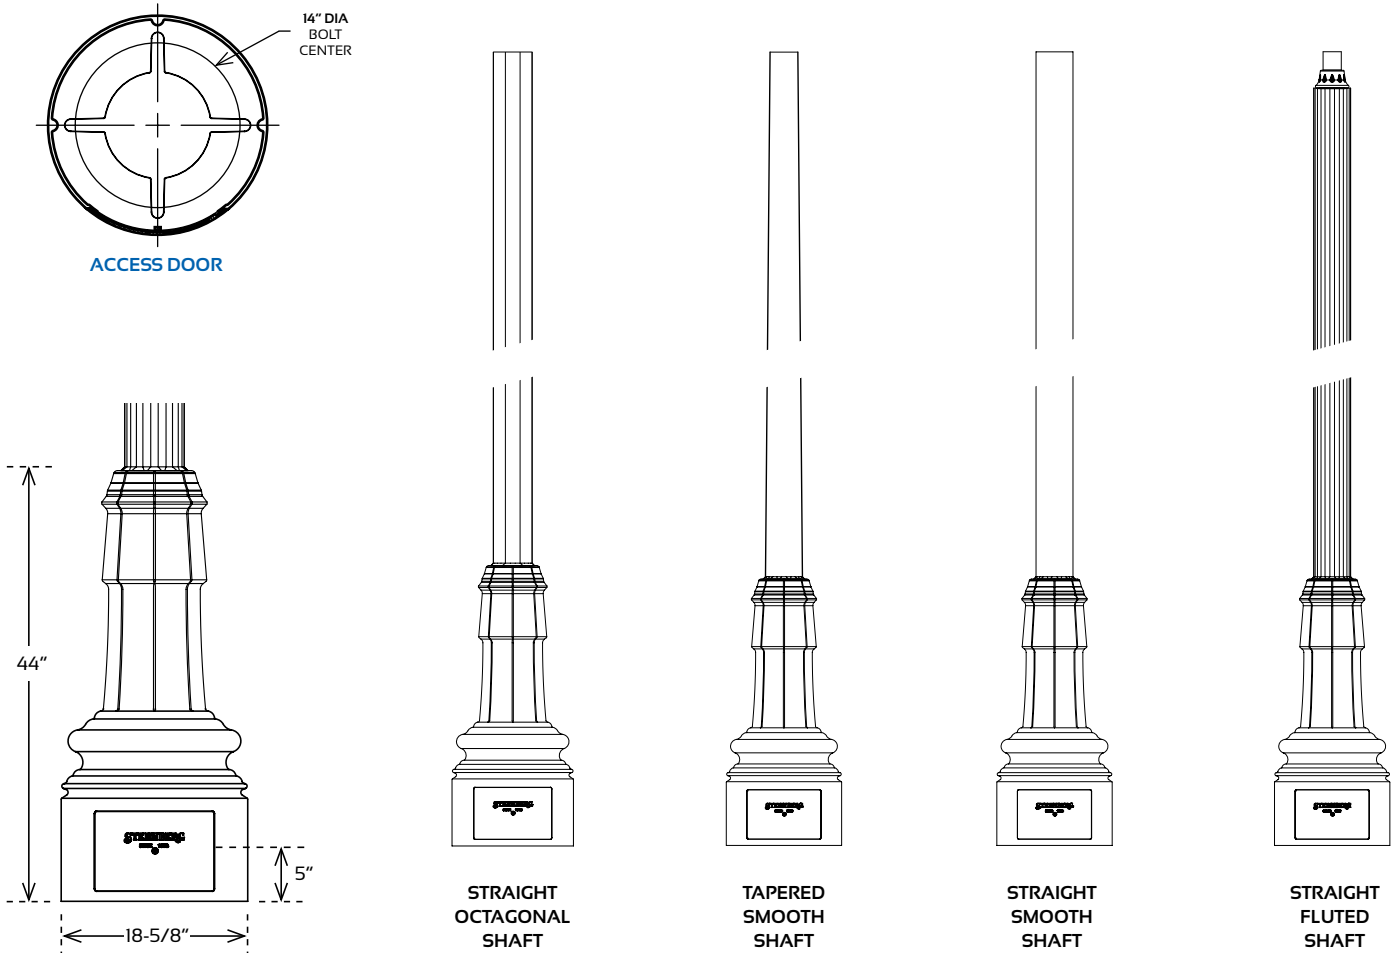

1200 FORT WAYNE SERIES

ORNAMENTAL POLE

EPA Chart - AASHTO 2009

POLE HEIGHT	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	140 MPH	150 MPH
FP5 5" Straight Fluted Pole - 0.188" Wall Thickness							
10	20.36	16.18	13.09	10.74	8.92	7.46	6.29
12	15.27	11.99	9.56	7.71	6.27	5.13	4.21
14	11.84	9.13	7.13	5.61	4.43	3.49	2.73
16	9.32	7.02	5.32	4.03	3.02	2.22	1.58
18	7.37	5.37	3.89	2.76	1.89	1.19	0.63
FP5 5" Straight Fluted Pole - 0.25" Wall Thickness							
12	20.12	15.91	12.80	10.44	8.60	7.13	5.96
14	15.83	12.37	9.81	7.86	6.34	5.14	4.17
16	12.72	9.78	7.60	5.94	4.65	3.63	2.80
18	10.32	7.76	5.87	4.42	3.30	2.41	1.70
20	8.39	6.12	4.45	3.17	2.18	1.39	0.76
FP6 6" Straight Fluted Pole - 0.25" Wall Thickness							
12	30.27	24.06	19.46	15.97	13.25	11.09	9.35
14	24.05	18.93	15.15	12.27	10.03	8.25	6.82
16	19.55	15.21	11.99	9.54	7.64	6.13	4.91
18	16.12	12.33	9.54	7.41	5.75	4.44	3.38
20	13.37	10.02	7.55	5.66	4.20	3.04	2.10
P5 5" Straight Smooth Shaft - 0.125" Wall Thickness							
10	13.97	11.24	9.23	7.71	6.52	5.59	4.84
12	10.43	8.35	6.83	5.68	4.79	4.08	3.52
14	8.04	6.40	5.20	4.30	3.60	3.05	2.62
16	6.28	4.96	3.99	3.27	2.72	2.28	1.94
P5 5" Straight Smooth Shaft - 0.188" Wall Thickness							
12	15.77	12.68	10.41	8.68	7.35	6.29	5.44
14	12.44	9.96	8.15	6.77	5.71	4.87	4.20
16	10.02	7.99	6.50	5.38	4.51	3.83	3.29
18	8.16	6.46	5.22	4.29	3.58	3.02	2.57
P5 5" Straight Smooth Shaft - 0.25" Wall Thickness							
14	16.43	13.20	10.82	9.02	7.62	6.52	5.64
16	13.42	10.74	8.77	7.29	6.14	5.23	4.51
18	11.11	8.85	7.20	5.95	4.99	4.24	3.63
20	9.27	7.35	5.94	4.88	4.07	3.44	2.93
P6 6" Straight Smooth Shaft - 0.125" Wall Thickness							
10	20.99	16.93	13.94	11.66	9.88	8.42	7.24
12	15.98	12.85	10.55	8.81	7.44	6.29	5.36
14	12.64	10.13	8.29	6.90	5.79	4.85	4.08
16	10.22	8.15	6.64	5.50	4.59	3.79	3.14
P6 6" Straight Smooth Shaft - 0.188" Wall Thickness							
12	23.93	19.30	15.88	13.28	11.25	9.57	8.22
14	19.19	15.44	12.67	10.58	8.93	7.55	6.44
16	15.79	12.67	10.37	8.63	7.26	6.09	5.14
18	13.20	10.56	8.61	7.15	5.98	4.96	4.14
P6 6" Straight Smooth Shaft - 0.25" Wall Thickness							
14	25.22	20.32	16.71	13.97	11.82	10.05	8.61
16	20.92	16.82	13.80	11.52	9.72	8.21	6.99
18	17.66	14.17	11.60	9.65	8.12	6.80	5.74
20	15.10	12.08	9.86	8.18	6.85	5.69	4.75
T5 5"-3" Smooth Tapered Shaft - 0.125" Wall Thickness							
10	7.81	6.16	5.02	4.17	3.51	2.99	2.57
12	5.60	4.32	3.49	2.87	2.39	2.02	1.72
14	4.07	3.05	2.42	1.96	1.60	1.33	1.11
16	2.92	2.07	1.60	1.26	1.00	0.79	0.64

* Consult factory for other heights.

** All EPA values expressed in square feet.



SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

800-621-3376
 555 Lawrence Ave., Roselle, IL 60172
 info@sternberglighting.com
 www.sternberglighting.com

10/18 STERNBERG LIGHTING. ALL RIGHTS RESERVED. PRINTED IN THE USA.

1200 FORT WAYNE SERIES

ORNAMENTAL POLE

EPA Chart - AASHTO 2009

POLE HEIGHT	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	140 MPH	150 MPH
T5 5"-3" Smooth Tapered Shaft - 0.188" Wall Thickness							
10	11.84	9.42	7.72	6.43	5.44	4.65	4.02
12	8.76	6.89	5.61	4.65	3.91	3.32	2.86
14	6.68	5.16	4.17	3.42	2.85	2.41	2.05
16	5.13	3.87	3.09	2.50	2.06	1.71	1.44
T5 5"-3" Smooth Tapered Shaft - 0.25" Wall Thickness							
12	11.64	9.22	7.54	6.27	5.29	4.51	3.89
14	9.04	7.08	5.75	4.76	3.99	3.38	2.90
16	7.15	5.50	4.43	3.64	3.02	2.54	2.16
18	5.67	4.26	3.40	2.75	2.26	1.88	1.57
T54 5"-4" Smooth Tapered Shaft - 0.125" Wall Thickness							
10	7.74	6.20	5.06	4.20	3.54	3.01	2.59
12	5.52	4.37	3.54	2.91	2.43	2.05	1.75
14	3.97	3.10	2.47	2.00	1.64	1.37	1.14
16	2.81	2.14	1.66	1.31	1.04	0.84	0.68
T54 5"-4" Smooth Tapered Shaft - 0.188" Wall Thickness							
12	8.68	6.94	5.66	4.69	3.94	3.36	2.89
14	6.58	5.22	4.22	3.47	2.89	2.44	2.08
16	5.02	3.94	3.15	2.56	2.11	1.75	1.48
18	3.80	2.92	2.29	1.83	1.48	1.20	0.99
T54 5"-4" Smooth Tapered Shaft - 0.25" Wall Thickness							
14	8.95	7.13	5.80	4.80	4.03	3.42	2.94
16	7.04	5.57	4.49	3.69	3.07	2.59	2.20
18	5.55	4.34	3.47	2.81	2.31	1.93	1.62
20	4.33	3.34	2.62	2.09	1.69	1.38	1.14
T6 6"-3" Smooth Tapered Shaft - 0.125" Wall Thickness							
10	11.87	9.54	7.82	6.52	5.51	4.72	4.08
12	8.76	7.00	5.71	4.78	3.98	3.39	2.91
14	6.64	5.27	4.26	3.50	2.92	2.47	2.11
16	5.08	3.98	3.18	2.59	2.13	1.78	1.50
T6 6"-3" Smooth Tapered Shaft - 0.188" Wall Thickness							
12	13.47	10.82	8.86	7.38	6.24	5.33	4.61
14	10.53	8.41	6.86	5.69	4.78	4.07	3.50
16	8.38	6.65	5.39	4.44	3.71	3.14	2.68
18	6.71	5.28	4.25	3.47	2.87	2.41	2.04
T6 6"-3" Smooth Tapered Shaft - 0.25" Wall Thickness							
14	14.10	11.31	9.25	7.70	6.50	5.55	4.79
16	11.41	9.11	7.42	6.15	5.17	4.40	3.78
18	9.35	7.43	6.02	4.96	4.14	3.50	2.99
20	7.70	6.07	4.88	3.99	3.31	2.77	2.35
T64 6"-4" Smooth Tapered Shaft - 0.125" Wall Thickness							
10	11.91	9.57	7.85	6.55	5.54	4.74	4.10
12	8.81	7.04	5.74	4.77	4.01	3.41	2.94
14	6.70	5.32	4.31	3.54	2.96	2.50	2.14
16	5.14	4.04	3.23	2.63	2.17	1.81	1.53
T64 6"-4" Smooth Tapered Shaft - 0.188" Wall Thickness							
12	13.52	10.86	8.90	7.42	6.27	5.36	4.63
14	10.58	8.46	6.90	5.73	4.82	4.11	3.53
16	8.44	6.71	5.44	4.49	3.75	3.18	2.72
18	6.79	5.35	4.30	3.52	2.92	2.45	2.08
T64 6"-4" Smooth Tapered Shaft - 0.25" Wall Thickness							
14	14.16	11.36	9.30	7.74	6.53	5.58	4.82
16	11.48	9.17	7.48	6.20	5.21	4.43	3.81
18	9.43	7.49	6.07	5.01	4.19	3.54	3.03
20	7.79	6.14	4.94	4.05	3.36	2.82	2.39

* Consult factory for other heights.
 ** All EPA values expressed in square feet.