



# 8700 GENEVA SERIES

ORNAMENTAL POLE

**DIMENSIONS**  
11" Ø  
43" TALL



JOB NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

MEMO \_\_\_\_\_

## BUILD A PART NUMBER

ORDERING EXAMPLE: 8714FP5-.188-BCC-GFILPIUC-SH/BKT

Base Model	Height	Shaft	Wall Thickness	Post Center Cap	Option Burial	Option Photocell	Option Receptacle	Option Flag Pole Holder	Option Banner Arms	Option Planter Arms	Option Sign Arms	Option Speaker Hub	Option Sign Bracket	Option Steel Wreath Hook	Finish

### Model

• 87

### Height

• 8 • 10 • 12 • 14 • 16 • 18

### Shaft

- T4: 4" - 3" Tapered Smooth<sup>1</sup>
- T5: 5" - 3" Tapered Smooth
- P4: 4" Straight Smooth
- P5: 5" Straight Smooth
- FP4: 4" Straight Fluted<sup>1</sup>
- FP5: 5" Straight Fluted
- TFP5: 5" - 3" Tapered Fluted

<sup>1</sup>Maximum recommended height 14'.  
<sup>2</sup>Not available in .125 wall.

### Wall Thickness

- .125: 1/8" Wall Thickness
- .188: 3/16" Wall Thickness
- .250: 1/4" Wall Thickness
- C: Cast Shaft, Varied Wall Thickness

<sup>3</sup>For cast "TFP" shaft only.

### Post Center Cap (if required)

(Click here to view post cap sheet)

- BCC • FCC • SCC • TFCC
- SSCC • RCC • PCC

### Options (Click here to view paint options sheet)

- DB4 Direct Burial mounting style pole, with 4' direct burial section
- HXB Helix Base mounting style pole
- PCD Electronic Button Photocontrol, mounted on an access door (120V-277V)
- PCD4 Electronic Button Photocontrol, mounted on an access door (480V)
- GFI IUC 15 Amp duplex GFCI receptacles with a standard in-use cover

- GFI LPIUC 15 Amp duplex GFCI receptacles with a low-profile in-use cover
- GFI IB 15 Amp duplex GFCI receptacle installed in pole base, includes mouse hole on access door for wire access
- DCO IUC Duplex receptacles with a standard in-use cover (NO GFCI PROTECTION)
- DCO LPIUC Duplex receptacles with a low-profile in-use cover (NO GFCI PROTECTION)
- DCO IB Duplex receptacles installed in pole base, includes mouse hole on access door for wire access (NO GFCI PROTECTION)
- GFB Remote Ground Fault Breaker installed in pole base (for use with NON-GFCI receptacles)
- FH Cast Aluminum flag holder mount, for use with 1" diameter flag pole
- SBA Single Banner Arm, "PM" style mount
- DBA Double Banner Arms, "PM" style mount
- SBAR Single Banner Arm and Ring, for triangle banners, "PM" style mount
- HSBA Single Banner Arm, HUB mount style mount
- HDBA Double Banner Arms, HUB mount style mount
- BDBA6 Double Banner Arms, Break-Away style, to break with 60MPH wind gust
- BDBA9 Double Banner Arms, Break-Away style, to break with 90MPH wind gust
- C4SBA Single Banner Arm, Clamp-Style mount, for 4" diameter poles
- C5SBA Single Banner Arm, Clamp-Style mount, for 5" diameter poles
- C4DBA Double Banner Arms at 180°, Clamp-Style mount, for 4" diameter poles
- C5DBA Double Banner Arms at 180°, Clamp-Style mount, for 5" diameter poles

- DHPA Double Hooked Planter Arm
- SHPA Single Hooked Planter Arm
- DSPA Double Stepped Planter Arm
- SSPA Single Stepped Planter Arm
- PA478 Cast aluminum decorative planter arm
- SA78 Small cast aluminum decorative sign arm, with 24" long channel for blade sign by others
- SA478 Large cast aluminum decorative sign arm, with 24" long channel for blade sign by others
- SABA Banner arm style sign arm, with 24" long channel for blade sign by others
- SH Female threaded speaker hub, advise thread size
- SB Sign Bracket, vertically mounted on pole shaft
- WHK Steel wreath hook

### Finish (Click here to view paint finish sheet)

#### Standard Finishes<sup>4</sup>

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

<sup>4</sup>Smooth finishes are available upon request.

#### Custom Finishes<sup>5</sup>

- CM Custom Match
  - OI Old Iron
  - RT Rust
  - WBR Weathered Brown
  - CD Cedar
  - WBK Weathered Black
  - TT Two Tone
- <sup>5</sup>Custom colors require upcharge.
- #### Sternberg Select Finishes
- VG Verde Green
  - SI Swedish Iron
  - OWGT Old World Gray Textured



SternbergLighting

ESTABLISHED 1923

800-621-3376  
555 Lawrence Ave., Roselle, IL 60172  
contactus@sternberglighting.com  
www.sternberglighting.com

## Specifications

### Construction

The base shall be designed with a octagonal lower base which transitions to an upper base having twelve flutes and shall be made of heavy wall, 356 alloy cast aluminum. It shall have a 1" thick floor cast as an integral part of the base. The shaft shall be externally welded circumferentially to the base.

### Tenon

Standard tenon size to be 3" OD x 3" tall, consult factory for additional sizes.

### Shaft

The **straight smooth shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition

The **tapered smooth shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition

The **straight fluted shaft** will have a 12 flat flute profile and shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition

The **tapered fluted shaft** will have a 16 flat flute profile and shall be made of heavy wall 356 alloy cast aluminum.

### Installation

**Anchor Base:** Four 5/8" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage, they shall be mounted in a 7" bolt circle. A door shall be provided for wiring and anchor bolt access. It shall be secured with stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.


**Direct Burial:** 4' direct burial portion of pole shaft extending below pole base. Includes "Slipping" base style which has set screws at the neck to tighten the base down to the pole shaft. Includes anti-rotational rod and (2) wire-way holes on direct burial portion.

### Warranty

Five-year limited warranty. See product and finish warranty guide for details.

### Finish

Refer to website for details.

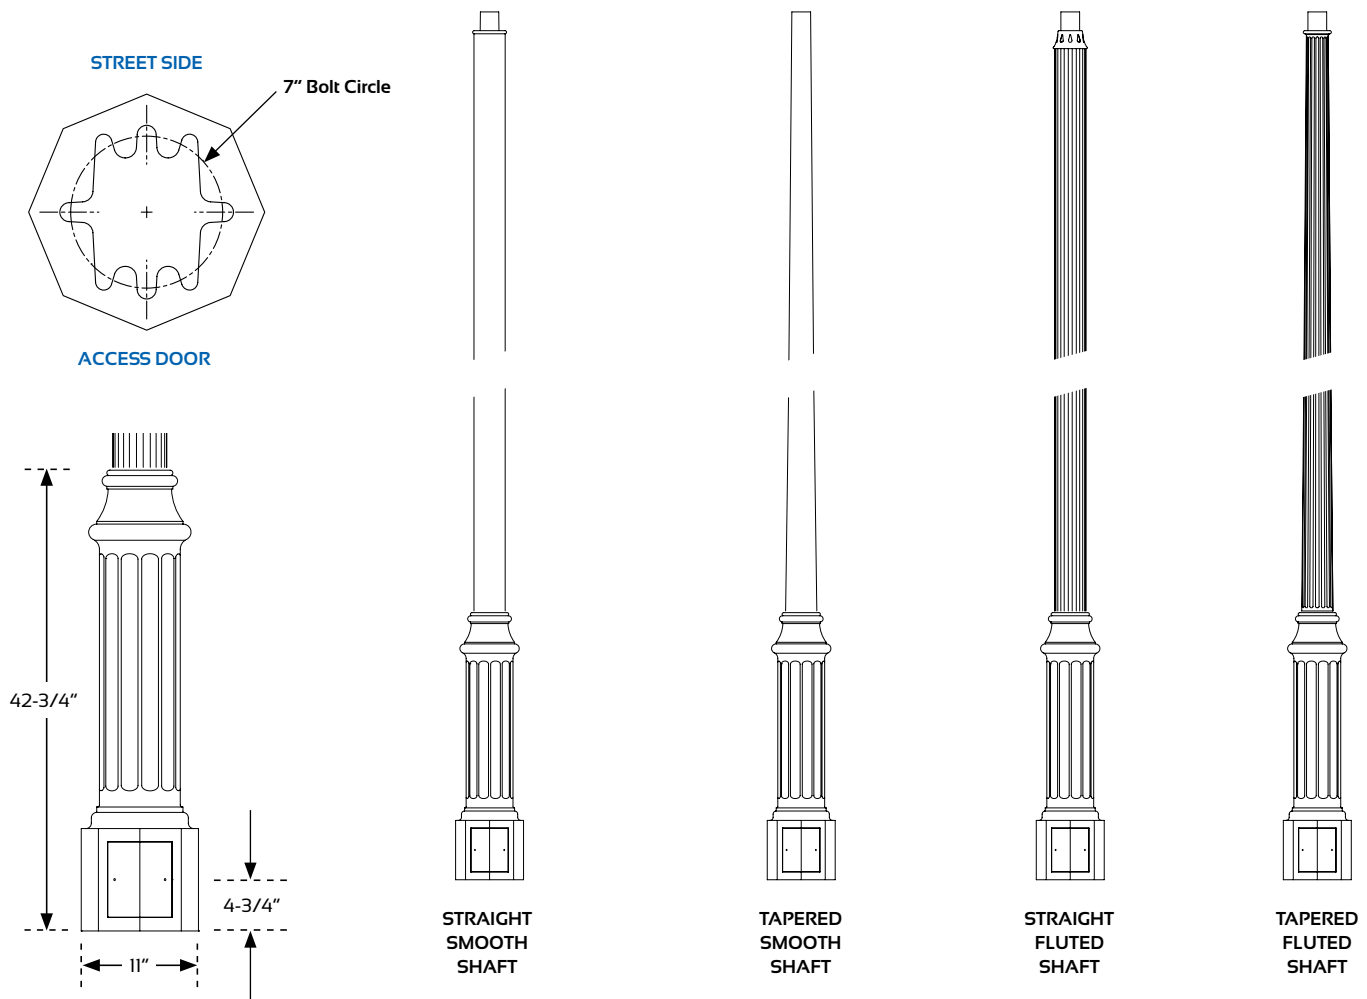

# 8700 GENEVA SERIES

ORNAMENTAL POLE

## EPA Chart - AASHTO 2009

POLE HEIGHT	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	140 MPH	150 MPH
FP4 4" Straight Smooth Shaft - 0.125" Wall Thickness							
12	5.83	4.42	3.37	2.58	1.96	1.47	1.07
10	8.15	6.35	5.02	4.01	3.23	2.61	2.10
8	11.95	9.50	7.68	6.30	5.22	4.37	3.68
FP4 4" Straight Smooth Shaft - 0.188" Wall Thickness							
14	6.88	5.21	3.97	3.03	2.30	1.72	1.25
12	9.06	7.03	5.53	4.39	3.50	2.80	2.23
10	12.24	9.67	7.77	6.32	5.19	4.30	3.58
8	17.56	14.04	11.43	9.45	7.91	6.68	5.70
FP5 5" Straight Fluted Pole - 0.188" Wall Thickness							
16	9.26	6.97	5.28	3.99	2.99	2.20	1.56
14	11.75	9.06	7.07	5.56	4.38	3.45	2.70
12	15.14	11.88	9.47	7.63	6.21	5.08	4.16
10	20.15	16.01	12.95	10.62	8.81	7.38	6.22
FP5 5" Straight Fluted Pole - 0.25" Wall Thickness							
16	12.64	9.71	7.54	5.89	4.61	3.59	2.77
14	15.72	12.28	9.73	7.79	6.29	5.09	4.13
12	19.95	15.78	12.69	10.34	8.51	7.06	5.89
10	26.26	20.96	17.04	14.06	11.74	9.90	8.41
P4 4" Straight Smooth Shaft - 0.125" Wall Thickness							
14	4.38	3.30	2.63	2.13	1.75	1.46	1.22
12	5.96	4.62	3.74	3.08	2.57	2.17	1.85
10	8.25	6.52	5.32	4.42	3.72	3.17	2.73
8	12.03	9.62	7.90	6.60	5.59	4.79	4.15
P4 4" Straight Smooth Shaft - 0.188" Wall Thickness							
14	7.04	5.45	4.41	3.63	3.03	2.56	2.18
12	9.19	7.23	5.90	4.89	4.11	3.50	3.01
10	12.35	9.84	8.06	6.72	5.68	4.86	4.21
8	17.64	14.16	11.66	9.76	8.28	7.11	6.17
P4 4" Straight Smooth Shaft - 0.25" Wall Thickness							
14	9.40	7.37	5.99	4.96	4.16	3.53	3.03
12	12.05	9.55	7.82	6.50	5.49	4.68	4.04
10	15.99	12.78	10.50	8.77	7.43	6.37	5.51
8	22.62	18.20	14.99	12.56	10.67	9.17	7.96
P5 5" Straight Smooth Shaft - 0.188" Wall Thickness							
16	9.96	7.93	6.45	5.34	4.48	3.80	3.26
14	12.35	9.89	8.09	6.72	5.67	4.83	4.17
12	15.64	12.58	10.32	8.61	7.28	6.24	5.40
10	20.56	16.57	13.64	11.41	9.68	8.31	7.21

\* Consult factory for other heights.  
 \*\* All EPA values expressed in square feet.



800-621-3376  
 555 Lawrence Ave., Roselle, IL 60172  
 contactus@sternberglighting.com  
 www.sternberglighting.com

# 8700 GENEVA SERIES

ORNAMENTAL POLE

## EPA Chart - AASHTO 2009

POLE HEIGHT	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	140 MPH	150 MPH
P5 5" Straight Smooth Shaft - 0.25" Wall Thickness							
16	13.33	10.67	8.72	7.24	6.10	5.20	4.48
14	16.32	13.11	10.74	8.95	7.57	6.47	5.60
12	20.45	16.47	13.54	11.32	9.59	8.23	7.13
10	26.67	21.52	17.73	14.85	12.61	10.84	9.41
T 4"-3" Smooth Tapered Shaft - 0.125" Wall Thickness							
12	3.12	2.28	1.66	1.33	1.07	0.88	0.72
10	4.56	3.49	2.70	2.22	1.84	1.55	1.32
8	6.88	5.42	4.34	3.61	3.04	2.59	2.23
T 4"-3" Smooth Tapered Shaft - 0.188" Wall Thickness							
14	3.68	2.69	1.95	1.56	1.26	1.03	0.85
12	5.03	3.83	2.94	2.40	1.99	1.67	1.41
10	6.98	5.46	4.33	3.58	3.01	2.55	2.19
8	10.20	8.11	6.57	5.48	4.63	3.97	3.43
T 4"-3" Smooth Tapered Shaft - 0.25" Wall Thickness							
14	5.08	3.82	2.89	2.35	1.93	1.61	1.35
12	6.73	5.20	4.07	3.36	2.80	2.37	2.02
10	9.14	7.20	5.77	4.80	4.04	3.44	2.97
8	13.15	10.50	8.54	7.14	6.05	5.19	4.49
T5-3 5"-3" Smooth Tapered Shaft - 0.125" Wall Thickness							
16	2.89	2.05	1.58	1.24	0.98	0.78	0.63
14	4.03	3.02	2.40	1.94	1.59	1.31	1.10
12	5.54	4.28	3.46	2.84	2.37	1.99	1.70
10	7.72	6.09	4.96	4.12	3.47	2.95	2.54
T5-3 5"-3" Smooth Tapered Shaft - 0.188" Wall Thickness							
16	5.10	3.84	3.06	2.48	2.04	1.70	1.42
14	6.62	5.12	4.13	3.39	2.83	2.38	2.03
12	8.69	6.83	5.56	4.61	3.87	3.29	2.83
10	11.71	9.32	7.64	6.36	5.38	4.60	3.98
T5-3 5"-3" Smooth Tapered Shaft - 0.25" Wall Thickness							
16	7.10	5.46	4.40	3.61	3.00	2.52	2.14
14	8.98	7.02	5.71	4.72	3.95	3.36	2.88
12	11.54	9.14	7.47	6.21	5.24	4.47	3.86
10	15.33	12.25	10.06	8.40	7.11	6.10	5.28

\* Consult factory for other heights.

\*\* All EPA values expressed in square feet.



**SternbergLighting**

ESTABLISHED 1923

800-621-3376  
 555 Lawrence Ave., Roselle, IL 60172  
 contactus@sternberglighting.com  
 www.sternberglighting.com

5/21 STERNBERG LIGHTING. ALL RIGHTS RESERVED. PRINTED IN THE USA.