

3400 GEORGETOWN SERIES

SPECIFICATIONS

GENERAL

The ____ ft tall* decorative post shall be aluminum, one-piece construction. The 18" hexagonal cast aluminum, ornamentally pleated base shall be constructed with a ____ inch diameter aluminum shaft. The model shall be Sternberg Lighting #3400 or #3400R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall have a hexagonal lower section and be designed with a pleated and sculptured upper section terminated with a decorative ring and be made of heavy wall, 356 alloy cast aluminum. It shall have a 3/4" thick floor cast as an integral part of the base. The shaft shall be double circumferentially welded internally and externally to the base for added strength.

____ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

____ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.


____ The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

____ The **tapered fluted shaft** shall be made of heavy wall, 356 alloy cast aluminum.







INSTALLATION

Four 1/2" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

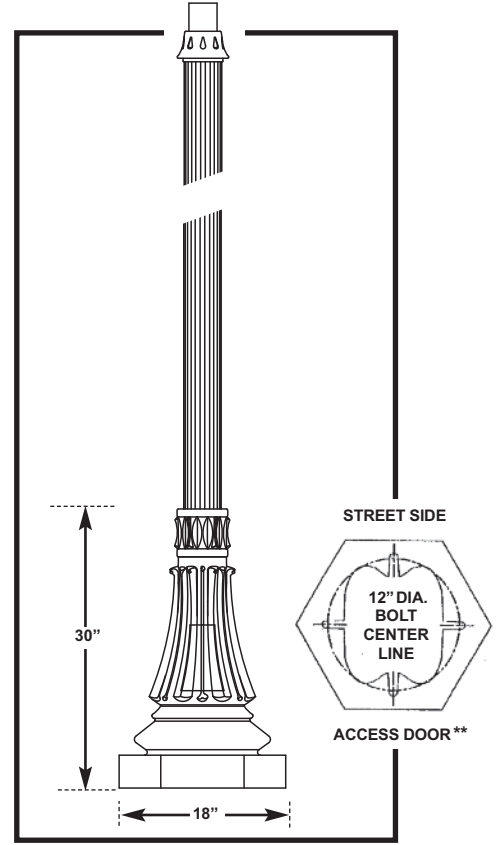Indicate the type of shaft needed (above)



**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

Cast Aluminum-Extruded Poles				18" Diameter Base x 30" High	
					
4" - 3" OD 34 __ ' T4 08' 10' 12' 14'	4" OD 34 __ ' P4 08' 10' 12' 14'	5" - 3" OD 34 __ ' T5 08' 10' 12' 14' 16'	5" OD 34 __ ' P5 08' 10' 12' 14' 16'	4" OD 34 __ ' FP4 08' 10' 12' 14'	5" OD 34 __ ' FP5 08' 10' 12' 14' 16'
SMOOTH TAPERED SHAFT	†SMOOTH STRAIGHT SHAFT	SMOOTH TAPERED SHAFT	†SMOOTH STRAIGHT SHAFT	†STRAIGHT FLUTED SHAFT	†STRAIGHT FLUTED SHAFT

*For candy cane poles insert ____ AG ft (feet - above grade height). See diagram on reverse side.

† Tenon not included if fixture or arm slips shaft O.D.

3400 GEORGETOWN SERIES

POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

Straight Poles

MODEL/HEIGHT/SHAFT	POST CAP CENTER	OPTIONS	FINISH
34 12 FP4	BCC	FH	BK


Candy Cane Poles

MODEL/HEIGHT/SHAFT	HEIGHT ABOVE GRADE	OPTIONS	FINISH
34 00 RT4	12 AG		BK

Part Number Selections

MODEL	HEIGHT	SHAFT
• 34	• 08' • 10' • 11' • 12' • 13' • 14' • 15' • 16'	• T4: 4"-3" Tapered Smooth* • T5: 5"-3" Tapered Smooth • P4: 4" Straight Smooth • P5: 5" Straight Smooth • FP4: 4" Straight Fluted* • FP5: 5" Straight Fluted • TFP5: 5"-3" Tapered Fluted <small>*Maximum recommended height 14'</small>

FP4 - 4" FP5 - 5"



OPTIONS AVAILABLE

- GFI
- GFB
- FH
- SBA
- DBA
- DB Direct Burial
- SBAR
- DSPA
- DHPA
- PA478
- PCD
- SH
- SB
- WHK
- HB Helix Burial

Part Number Selections

MODEL	HEIGHT	SHAFT	ABOVE GRADE
• 34	• 00	• RT4: 4"-3" Tapered Smooth • RT5: 5"-3" Tapered Smooth • RP4: 4" Straight Smooth • RP5: 5" Straight Smooth • RFP4: 4" Straight Fluted • RFP5: 5" Straight Fluted • RTFP5: 5"-3" Tapered Fluted	• 08' AG • 10' AG • 12' AG • 13' AG • 14' AG • 15' AG • 16' AG

POST CENTER CAP

- BCC (If Required)
- FCC
- SCC
- TFCC
- SSSC

STANDARD FINISHES*

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

*Smooth Finishes are available upon request



CUSTOM FINISHES

- OI Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone












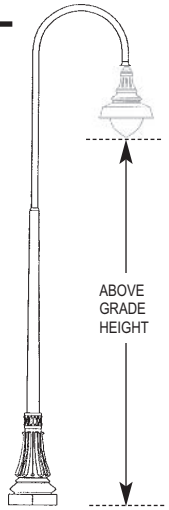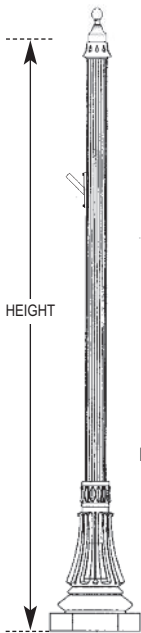

STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured








OPTIONS AVAILABLE

See Accessories Section for more options and information

    	<p>GFI - Ground Fault Interrupter mounts in the pole</p> <p>GFB - Ground Fault Breaker <i>inside</i> base</p> <p>FH - Flag Pole Holder mounts on the pole</p> <p>SBA - Single Banner Arm mounts on the pole</p> <p>DBA - Double Banner Arms mount on same side of the pole</p>	   	<p>SBAR - Single Banner Arm and Ring</p> <p>DSPA - Double Stepped Planter Arms mount on either side</p> <p>DHPA - Double Hooked Planter Arms mount on either side</p> <p>PA478 - Decorative Planter Arms with planter rings</p>	   	<p>PCD - Photo Control mounts on door on pole</p> <p>SH - Speaker Hub for mounting speaker, floodlight or signal</p> <p>SB - Sign Bracket mounts on pole to hold signs</p> <p>WHK - Wreath Hook mounts on pole to hold decorations</p>
--	---	--	---	--	--

POST CENTER CAPS (If Required)

 BCC - Ball Center Cap	 FCC - Finial Center Cap	 SCC - Spiked Center Cap	 TFCC - Tall Finial Center Cap	 SSSC - Side Spiked Center Cap
---	--	--	--	--