

3000 CLAYTON ROADWAY 10" Diameter

SPECIFICATIONS

GENERAL

The ____ ft tall decorative post shall be aluminum or steel, one piece construction. The post shall have a cast aluminum, decorative two-piece split base that clamps around the pole and base plate. The base measures 20" diameter x 16" tall.

CONSTRUCTION

The base shall be designed with a decorative curviform shape and transition to a curved hour-glass shaft. It shall be made of heavy wall, 356 alloy cast aluminum. **Indicate the type of shaft needed.**

____ The **round tapered fluted shaft** shall be made of ASTM A572 grade 50, high-strength structural steel or ASTM 6063T6 aluminum.

____ The **round tapered smooth shaft** shall be made of ASTM 6063T6 extruded aluminum and tempered to a T6 condition or ASTM A572 steel.


____ The **round straight fluted shaft** shall be made of ASTM A595 grade A, high-strength structural steel or ASTM 6061T6 aluminum.

____ The **round straight smooth shaft** shall be made of ASTM 6061T6 extruded aluminum and tempered to a T6 condition or ASTM A572 steel. It shall have a decorative fluted tenon.

____ The **octagonal tapered shaft** shall be made of ASTM A607 high-strength, tapered structural steel.


INSTALLATION

The cast aluminum fluted base cover shall clamp around the base plate and lower shaft of the pole assembly. It shall be clamped together using tamper-proof stainless steel screws. An access door shall be provided in the pole shaft and in the cast aluminum fluted base cover for wiring and mechanically secured with tamper-proof, stainless steel screws.

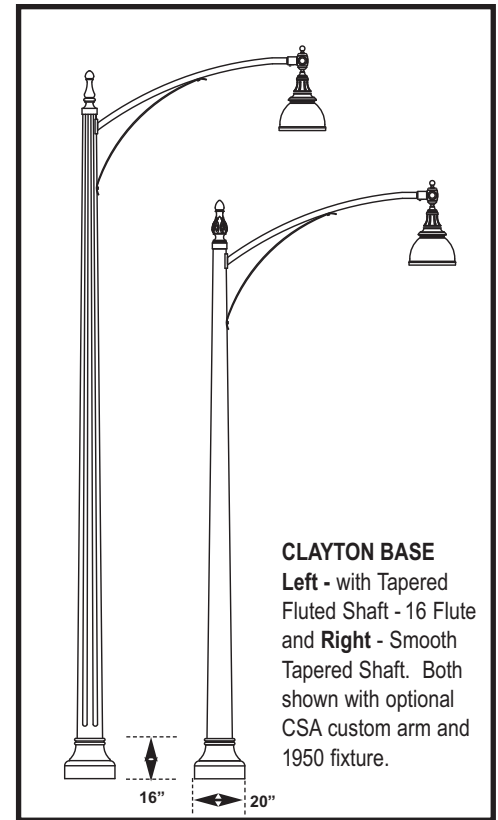

CLAYTON BASE
Left - with Tapered Fluted Shaft - 16 Flute and Right - Smooth Tapered Shaft. Both shown with optional CSA custom arm and 1950 fixture.

Roadway Arms Available for 3000 Clayton Series

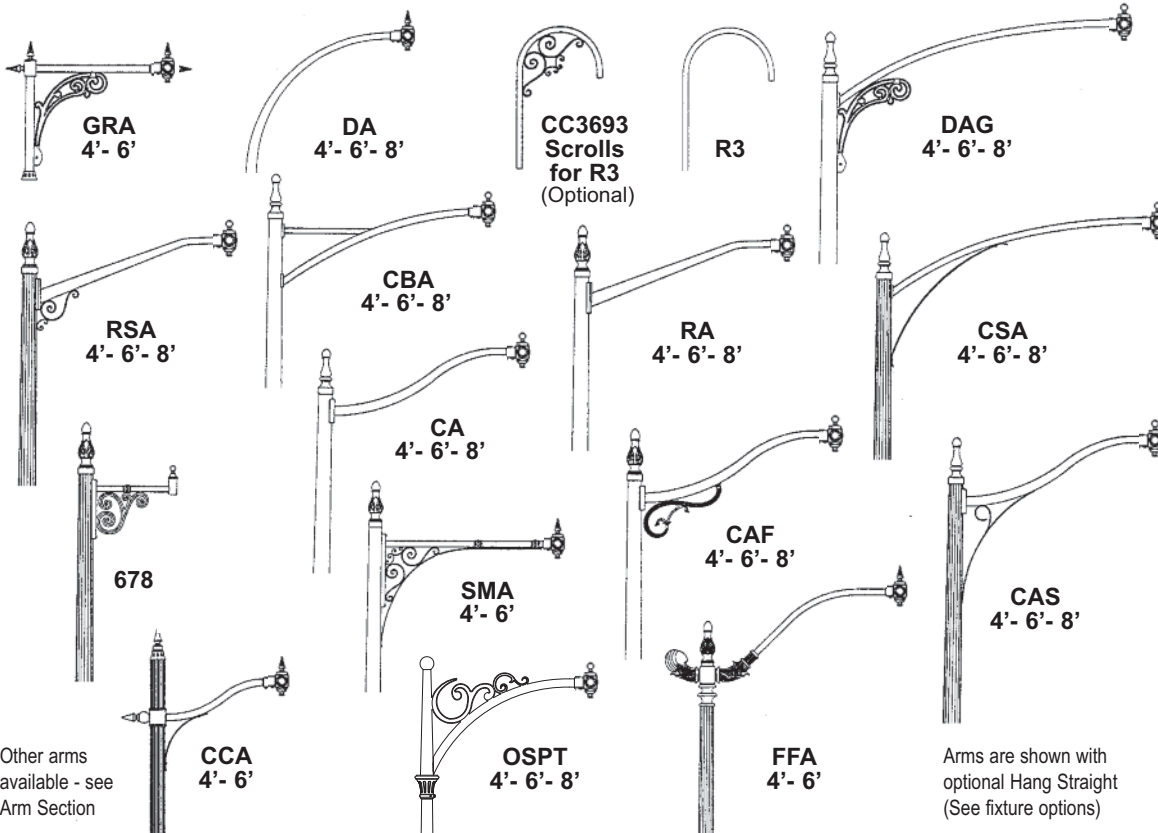

POLE HEIGHT CALCULATOR

Add distance listed below to desired mounting height of fixture to calculate pole height needed.

ARM







- CAS -2'
- CA -1'
- CAF -1'
- CSA -2'
- RA -1'
- RSA -1'
- DAG -2'
- SMA +1'
- GRA -3'
- CCA +1'
- CBA 0
- DA -7'
- R3 -3'
- FFA -3'
- OSPT -3'
- 678 0

3000 CLAYTON ROADWAY 10" Diameter POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

MODEL	*POLE HEIGHT	SHAFT MATERIAL	SHAFT STYLE	FLUTED SHAPE (If Applicable)	POST CAP CENTER	OPTIONS	FINISH
30	25	S	RTF		RDBP		BK


Part Number Selections

MODEL	*POLE HEIGHT	SHAFT MATERIAL	SHAFT SHAPE	FLUTED SHAPE (If Applicable)	SHAFT TYPE (Pole Shapes)
• 30	<ul style="list-style-type: none"> • 20' • 23' • 25' • 30' • 32' • 35' • 40' 	<ul style="list-style-type: none"> • S-Steel • A-Aluminum • G-Galvanized 	<ul style="list-style-type: none"> • RTF - Round Tapered Fluted • RTS - Round Tapered Smooth • RSF - Round Straight Fluted • RSS - Round Straight Smooth • OTS** - Octagonal Tapered Smooth 	<ul style="list-style-type: none"> • 16FF • 16SF • 12FF • 12SF • 8SF 	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>16-Sharp Flute</p>  </div> <div style="text-align: center;"> <p>16-Flat Flute</p>  </div> <div style="text-align: center;"> <p>12-Flat Flute</p>  </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  <p>Round</p> </div> <div style="text-align: center;">  <p>8-Sharp Flute</p> </div> <div style="text-align: center;">  <p>Octagonal</p> </div> </div>















Shaft diameters and wall thickness will be determined by the factory, based on desired pole design with selected options and basic wind velocity (Referenced by AASHTO). Check your local area for wind speed or any other structural requirements.

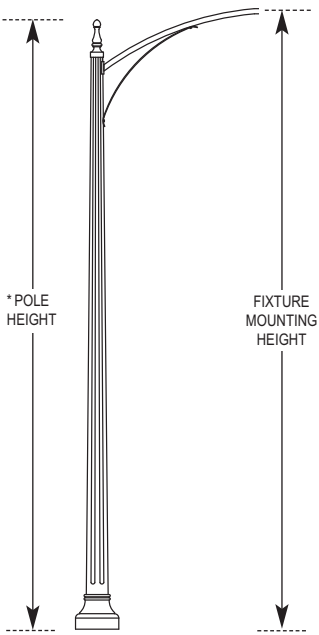*Use Pole Height Calculator to determine pole height based on desired mounting height of fixture.

All Tapered Shafts have a taper of 0.14 inch per foot of length, most shafts are available in steel and/or aluminum.




OPTIONS AVAILABLE See Accessories Section for more options and information

 GFI - Ground Fault Interrupter mounts in the pole  FH - Flag Pole Holder mounts on the pole  HS-B Hang Straight Ball  HS-F Hang Straight Finial	     	<p>SBA - Single Banner Arm mounts on the pole</p> <p>DBA - Double Banner Arms mount on same side of the pole</p> <p>SBAR - Single Banner Arm and Ring</p> <p>DSPA - Double Stepped Planter Arms mount on either side</p> <p>DHPA - Double Hooked Planter Arms mount on either side</p> <p>PA478 - Decorative Planter Arms with planter rings</p>	 PCD - Photo Control mounts on door on pole  SH - Speaker Hub for mounting speaker, floodlight or signal  SB - Sign Bracket mounts on pole to hold signs  WHK - Wreath Hook mounts on pole to hold decorations
--	--	--	---

POST CENTER CAPS (If Required)

- POST CENTER CAP**
- RC
 - RBCC3
 - RSSCC
 - RSB4
 - RSB5
 - RPBP
 - RDBP



- OPTIONS AVAILABLE (Above)**
- GFI
 - FH
 - SBA
 - DBA
 - DB Direct Burial
 - SBAR
 - DSPA
 - DHPA
 - PA478
 - HB Helix Burial
 - PCD
 - SH
 - SB
 - WHK

- STANDARD FINISHES***
- BKT Black Textured
 - WHT White Textured
 - PGT Park Green Textured
 - ABZT Architectural Medium Bronze Textured
 - DBT Dark Bronze Textured
- *Smooth Finishes are available upon request
- CUSTOM FINISHES**
- OI Old Iron

- RT Rust
 - WBR Weathered Brown
 - CD Cedar
 - WBK Weathered Black
 - TT Two Tone
- STERNBERG SELECT FINISHES**
- VG Verde Green
 - SI Swedish Iron
 - OWGT Old World Gray Textured