5200 BARRINGTON ROADWAY 5" to 6" Diameters

SPECIFICATIONS

GENERAL

The ____ ft tall decorative post shall be aluminum or steel, one piece construction. The post shall have a cast aluminum, decorative two-piece split base that clasps around the pole and base plate. 20" diameter x 23" tall cover.

CONSTRUCTION

The clam shell base shall be designed with twelve curved flutes and tear drop decorations and be made of heavy wall, 356 alloy cast aluminum. **Indicate the type of shaft needed.**

The **round tapered fluted shaft** shall be made of ASTM A572 grade 50, high-strength structural <u>steel</u> or ASTM 6063T6 <u>aluminum</u>.

____ The **round tapered smooth shaft** shall be made of ASTM 6063T6 extruded <u>aluminum</u> and tempered to a T6 condition or ASTM A572 <u>steel</u>.


____ The **round straight fluted shaft** shall be made of ASTM A595 grade A, high-strength structural <u>steel</u> or ASTM 6061T6 <u>aluminum</u>.


The **round straight smooth shaft** shall be made of ASTM 6061T6 extruded <u>aluminum</u> and tempered to a T6 condition or ASTM A572 <u>steel</u>. It shall have a decorative fluted tenon.

The **octagonal tapered shaft** shall be made of ASTM A607 high-strength, tapered structural <u>steel</u>.

INSTALLATION

The cast aluminum fluted base cover shall clamp around the base plate and lower shaft of the pole assembly. It shall be clamped together using tamper-proof stainless steel screws. An access door shall be provided in the pole shaft for wiring.

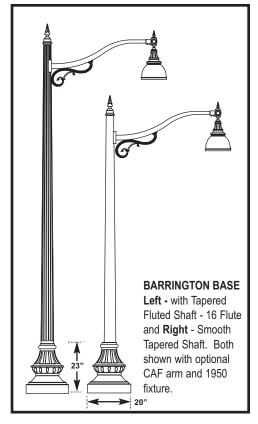

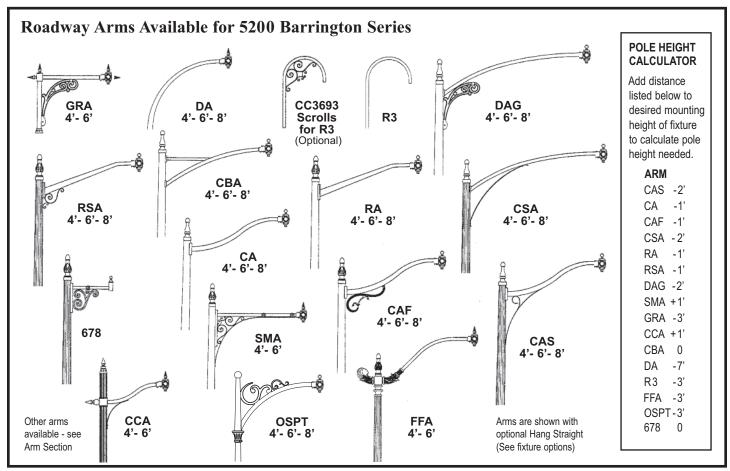


5200 BARRINGTON ROADWAY

5" to 6" **Diameters**

POSTS/OPTIONS/POST CAPS

BUILDING A PART NUMBER

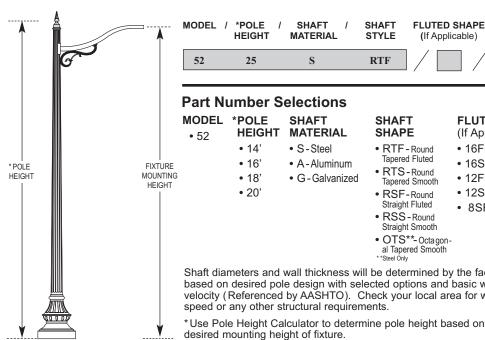

MODEL *POLE **HEIGHT**

SHAFT MATERIAL SHAFT STYLE **FLUTED SHAPE** (If Applicable)

POST CAP CENTER

OPTIONS

FINISH

52 25 S RTF

• 16SF

• 12FF

12SF

• 8SF

RDBP

BK

Part Number Selections

MODEL *POLE **SHAFT** HEIGHT **MATERIAL** • 52 14'

- S-Steel • 16' • A-Aluminum
- 18' · G-Galvanized
- 20'

SHAFT SHAPE

- RTF-Round Tapered Fluted
- RTS-Round Tapered Smooth
- RSF-Round Straight Fluted • RSS-Round
- Straight Smooth • OTS**- Octagon-
- al Tapered Smooth

Shaft diameters and wall thickness will be determined by the factory, based on desired pole design with selected options and basic wind velocity (Referenced by AASHTO). Check your local area for wind speed or any other structural requirements.

(If Applicable) • 16FF 16-Sharp Flute 16-Flat Flute 12-Flat Flute









Round

8 - Sharp Flute

PCD - Photo Control mounts

on door on pole


Octagonal

All Tapered Shafts have a taper of 0.14 inch per foot of length, most shafts are available in steel and/or aluminum.

OPTIONS AVAILABLE

See Accessories Section for more options and information

0



SBA - Single Banner Arm mounts on the pole **DBA** - Double Banner Arms mount on same side of the pole SBAR-Single Banner Arm and Ring **DSPA**- Double Stepped Planter **DHPA-** Double Hooked Planter Arms mount on either side PA478-Decorative Planter Arms

Arms mount on either side

with planter rings

SB - Sign Bracket mounts on pole to hold signs

SH - Speaker Hub for mounting speaker, floodlight or signal

WHK - Wreath Hook mounts on pole to hold decorations

POST CENTER CAPS (If Required)

POST CENTER CAP

- RC
- RBCC3 RSSCC
- RSB4 • RSB5 • RPBP

RC RBCC3 RSSCC RSB4

- **OPTIONS AVAILABLE (Above)**
- PCD • GFI • SBAR • FH • DSPA • SH
- SB • DHPA SBA • PA478 • WHK DBA
- DB Direct Burial HB Helix Burial

STANDARD FINISHES*

- **Black Textured** BKT • WHT White Textured
- PGT Park Green Textured ABZT Architectural Medium **Bronze Textured**
- Dark Bronze Textured *Smooth Finishes are available upon request

CUSTOM FINISHES

01 Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

STERNBERG SELECT **FINISHES**

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

