

7312TO BRIGHTON SERIES

SPECIFICATIONS

GENERAL


The ____ft tall* decorative post shall be aluminum, one-piece cast construction. The 20" wide octagonal, cast aluminum base shall have alternating curved and flat sides. The model shall be Sternberg Lighting #7312TO, #7314TO, #7316TO or #7300TOR for candy cane pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION


The base shall have a large octagonal lower section designed with a curved cruciform shape. It shall taper into the shaft and gently transition into a flared top section. It shall be made of heavy wall, 356 alloy cast aluminum and be fully cast in one piece. It shall have a 1" thick floor cast as an integral part of the base.

INSTALLATION

Four ³/4" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

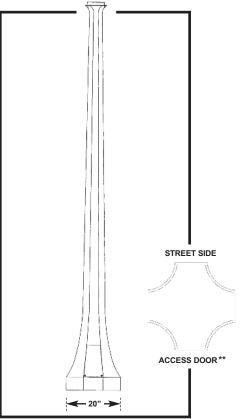

**See installation template for exact door position.
Bolt circle dimensions may change on taller poles.

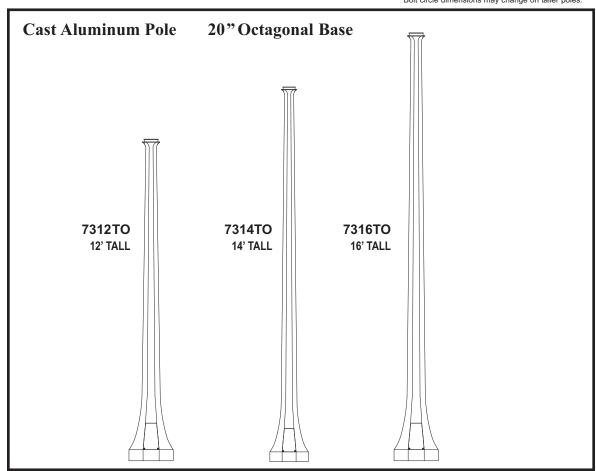


^{*}For candy cane poles insert _____AG ft (feet - above grade height).




7312TO BRIGHTON SERIES

POSTS / OPTIONS / POST CAPS

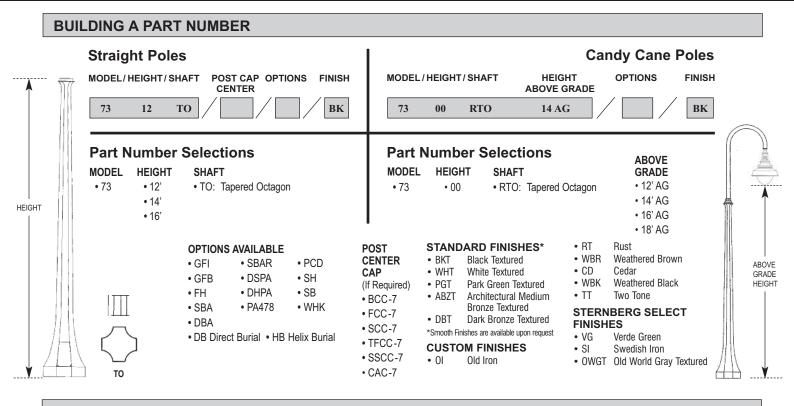

OPTIONS AVAILABLE

See Accessories Section for more options and information

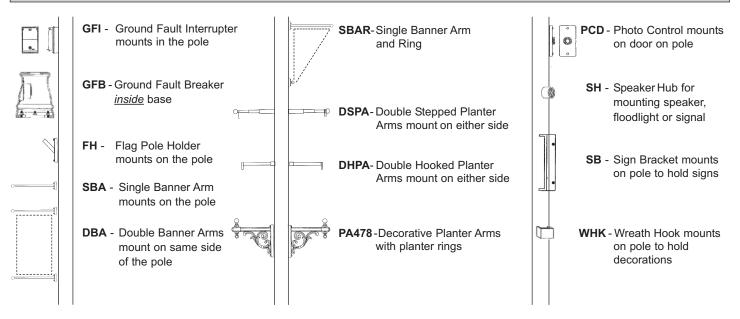

POST CENTER CAPS (If Required)



BCC-7 Ball Center Cap



SCC-7 Spiked Center Cap



SSCC-7 Side Spiked Center Cap



FCC-7 Finial Center Cap



TFCC-7 Tall Finial Center Cap



CAC-7 Cast Cap-Plain

