



# LED-A673/LED-A675

## POST-TOP LED CONVERSION KIT FOR A673 & A675 YALE ACORN - "EASY TO INSTALL"

The versatile LED-A673/ LED-A675 conversion kit transforms existing Sternberg A673 & A675 acorns into energy-efficient luminaires at significantly reduced maintenance costs. The wide variety of options makes this the industry's choice when converting from conventional lamp sources to energy-efficient lighting; made by Sternberg Lighting for Sternberg Lighting.

## LED CONVERSION KIT

JOB NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

MEMO \_\_\_\_\_

### HOW TO ORDER: LED-A673-4L40T5-MDL05

SERIES	LEDS	CCT - COLOR TEMPERATURE (K)	DISTRIBUTION TYPE	DRIVER	OPTIONAL DRIVER HOUSING
LED-A673	4L	27(00) K	T3	MDL02	682
LED-A675		30(00) K	T5	MDL03	682M
LED UPGRADE KIT FOR A673 & A675		40(00) K		MDL05	
		50(00) K		MDL06	
				MDH02	
				MDH03	
				MDH05	
				MDH06	



### Features & Specifications

#### Optical

- Utilizes high output, high brightness LEDs.
- Minimum CRI of 70, CCT 2,700K, 3,000K, 4,000K and 5,000K. Consult factory for custom color CCT.
- LM-79 and LM-80 tests in accordance with IESNA standards.
- Lumen depreciation rated 100,000 hrs.
- RoHS Compliant.

#### Electrical

- Minimum driver power factor: >0.9.
- Electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines (10KA).
- UL listed in U.S. and Canada.

#### Mechanical

- Anodized aluminum heatsinks.
- Rugged cast aluminum carrier plate.
- Designed for Sternberg 5P, 5T, 508 and 900 fitters. Consult factory for limitations and other fitters.

#### Controls

- Supplied with programmable driver. (0-10 volts)

#### Warranty & Standards


LED Systems and Drivers - 7 years.  
All conversion kits shall be free from all defects in materials and workmanship for a period of 7 years from the date of manufacture. The luminaire manufacturer shall warrant the LED boards/ system, during the stated warranty period, against failure defined as more than 10 percent of non-operating LEDs.

#### Drivers (0v-10v Dimming)

- MDL02: 250mA, 120v-277v
- MDL03: 350mA, 120v-277v
- MDL05: 500mA, 120v-277v
- MDL06: 630mA, 120v-277v
- MDH02: 250mA, 347v-480v
- MDH03: 350mA, 347v-480v
- MDH05: 500mA, 347v-480v
- MDH06: 630mA, 347v-480v

#### Optional Driver Housing

- 682: Driver housing required for decorative fitters manufactured between 1985 and 2004.
- 682M: Driver housing required for decorative fitters manufactured between 1985 and before.

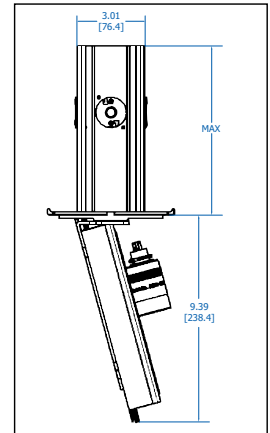

### Performance

LIGHT SOURCE	T3 INITIAL LUMENS	EFFICACY (LPW)	T5 INITIAL LUMENS	EFFICACY (LPW)	WATTAGE
4L27T_-MDL06	7585	77.4	7755	79.1	98
4L30T_-MDL06	8375	85.5	8570	87.4	98
4L40T_-MDL06	8655	88.3	8850	90.3	98
4L27T_-MDL05	6245	83.3	6345	84.6	75
4L30T_-MDL05	6900	92.0	7005	93.4	75
4L40T_-MDL05	7130	95.1	7240	96.5	75
4L27T_-MDL03	4915	89.4	4940	89.8	55
4L30T_-MDL03	5430	98.7	5460	99.3	55
4L40T_-MDL03	5610	102.0	5640	102.5	55
4L27T_-MDL02	3635	90.9	3645	91.1	40
4L30T_-MDL02	4020	100.5	4025	100.6	40
4L40T_-MDL02	4150	103.8	4160	104.0	40