

## DESCRIPTION

The OVH LED area luminaire provides uncompromising optical performance and outstanding versatility for a wide variety of area and roadway applications. Patented modular LightBAR™ technology delivers uniform and energy-conscious illumination to walkways, parking lots and roadways. UL/cUL listed for wet locations.

<b>Catalog #</b>		<b>Type</b>
<b>Project</b>		
<b>Comments</b>		<b>Date</b>
<b>Prepared by</b>		

## SPECIFICATION FEATURES

### Construction

Heavy-duty cast aluminum housing and removable door. 3G vibration rated to ensure strength of construction and longevity in application. Die-cast aluminum door frame features integral hinges for tool-less maintenance access.

### Optics

Choice of twelve patented, high efficiency AccuLED Optics™ manufactured from injection-molded acrylic. Optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics create consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/- 275K) CCT and nominal 70 CRI.

### Electrical

LED drivers hard mount to die-cast aluminum back casting for optimal heat sinking and operation efficiency. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. Shipped standard with the Cooper Lighting Solutions' proprietary circuit module designed to withstand 10kV of transient line surge. Thermal management incorporates both conduction and natural convection to transfer heat rapidly away from the LED source and retain optimal efficiency and light output. OVH LED luminaire is suitable for low temperature operation down to -40°C. Standard three-position tunnel type compression terminal block. 95% lumen maintenance expected at 60,000 hours per IESNA TM-21. LightBARs feature IP66 enclosure rating.

### Mounting

Two-bolt/one bracket slipfitter with cast-in pipe stop and leveling steps. Fixed-in-place birdguard seals around 1-1/4" or 2" mounting arms.

### Finish

Components finished in a standard grey five-stage Super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Consult your lighting representative at Cooper Lighting Solutions for a complete selection of standard colors including black and bronze. RAL and custom color matches available.

### Warranty

Five-year warranty.





## OVH LED

1 - 4 LightBARs  
LED

ROADWAY LUMINAIRE

## DIMENSIONS

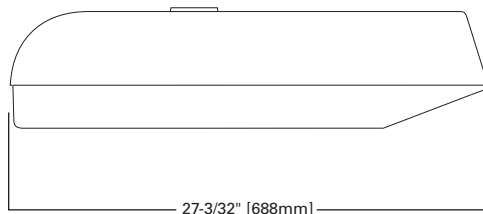

### CERTIFICATION DATA

UL/cUL Listed  
ISO 9001  
IP66 LightBARs  
3G Vibration Rated

### ENERGY DATA

Electronic LED Driver  
>0.9 Power Factor  
<20% Total Harmonic Distortion  
120-277V/50 & 60Hz, 347V/60Hz,  
480V/60Hz  
-40°C Minimum Temperature  
40°C Ambient Temperature Rating

### EPA

Effective Projected Area: (Sq. Ft.)  
.80

### SHIPPING DATA

Approximate Net Weight:  
21 lbs. (9.5 kgs.)

**POWER AND LUMENS BY BAR COUNT (21 LED LIGHTBARS)**

Number of LightBARs		E01	E02	E03	E04
<b>Drive Current</b>		350mA Drive Current			
<b>Power (Watts)</b>		25W	52W	75W	97W
<b>Current @ 120V (A)</b>		0.22	0.44	0.63	0.82
<b>Current @ 277V (A)</b>		0.10	0.20	0.28	0.36
<b>Current @ 347V (A)</b>		0.11	0.19	0.28	0.29
<b>Current @ 480V (A)</b>		0.09	0.15	0.20	0.21
<b>T2</b>	Lumens	2,999	5,997	8,996	11,994
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3
<b>T3</b>	Lumens	2,986	5,972	8,957	11,943
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3
<b>T4</b>	Lumens	2,939	5,877	8,816	11,754
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G3
<b>5MQ</b>	Lumens	2,999	5,997	8,996	11,994
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3
<b>5WQ</b>	Lumens	2,986	5,972	8,957	11,943
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3
<b>5XQ</b>	Lumens	2,939	5,877	8,816	11,754
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G3
<b>SL2</b>	Lumens	2,928	5,856	8,784	11,712
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
<b>SL3</b>	Lumens	2,969	5,937	8,906	11,875
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
<b>SL4</b>	Lumens	2,882	5,764	8,646	11,528
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
<b>RW</b>	Lumens	3,004	6,007	9,011	12,015
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3
<b>SLL/SLR</b>	Lumens	2,693	5,387	8,080	10,774
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G3

**POWER AND LUMENS BY BAR COUNT (7 LED LIGHTBARS)**

Number of LightBARs		F01	F02	F03	F04
<b>Drive Current</b>		1A Drive Current			
<b>Power (Watts)</b>		26W	55W	78W	102W
<b>Current @ 120V (A)</b>		0.22	0.46	0.66	0.86
<b>Current @ 277V (A)</b>		0.10	0.21	0.29	0.37
<b>Current @ 347V (A)</b>		32	60	85	105
<b>Current @ 480V (A)</b>		0.11	0.19	0.28	0.30
<b>T2</b>	Lumens	2,475	4,951	7,426	9,902
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3
<b>T3</b>	Lumens	2,465	4,930	7,395	9,859
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3
<b>T4</b>	Lumens	2,426	4,852	7,278	9,704
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
<b>5MQ</b>	Lumens	2,565	5,131	7,696	10,262
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2
<b>5WQ</b>	Lumens	2,531	5,061	7,592	10,123
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2
<b>5XQ</b>	Lumens	2,553	5,105	7,658	10,210
	BUG Rating	B2-U0-G1	B3-U0-G2	B3-U0-G3	B4-U0-G3
<b>SL2</b>	Lumens	2,417	4,834	7,251	9,668
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
<b>SL3</b>	Lumens	2,451	4,901	7,352	9,803
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
<b>SL4</b>	Lumens	2,379	4,758	7,138	9,517
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
<b>RW</b>	Lumens	2,480	4,959	7,439	9,918
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G3	B3-U0-G3
<b>SLL/SLR</b>	Lumens	2,224	4,447	6,671	8,894
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G3	B1-U0-G3


**LUMEN MAINTENANCE**

Ambient Temperature	25,000 Hours*	50,000 Hours*	60,000 Hours*	100,000 Hours	Theoretical L70 (Hours)
25°C	> 99%	> 97%	> 96%	> 93%	> 450,000
40°C	> 98%	> 97%	> 96%	> 92%	> 425,000
50°C	> 97%	> 96%	> 95%	> 91%	> 400,000


\* Per IESNA TM-21 data.

**LUMEN MULTIPLIER**


Ambient Temperature	Lumen Multiplier
10°C	1.02
15°C	1.01
25°C	1.00
40°C	0.99
50°C	0.96

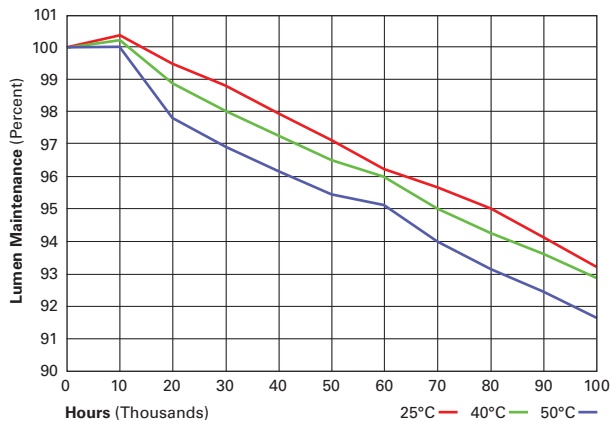


OPTIC ORIENTATION



Standard



Optics Rotated Left @ 90° (L90)



Optics Rotated Right @ 90° (R90)

ORDERING INFORMATION

Sample Number: OVH-E04-LED-E-U-T4-AP

Product Family <sup>1</sup>	Number of LightBARs <sup>2,3</sup>	Lamp Type	Ballast Type	Voltage	Distribution	Color
OVH=Full Cutoff Luminaire	E01=(1) 21 LED LightBAR E02=(2) 21 LED LightBARs E03=(3) 21 LED LightBARs E04=(4) 21 LED LightBARs F01=(1) 7 LED LightBAR F02=(2) 7 LED LightBARs F03=(3) 7 LED LightBARs F04=(4) 7 LED LightBARs	LED=Solid State Light Emitting Diodes	E=Electronic	U=Universal (120-277V) 8=480V <sup>4</sup> 9=347V	T2=Type II T3=Type III T4=Type IV SL2=Type II with Spill Control SL3=Type III with Spill Control SL4=Type IV with Spill Control RW=Rectangular Wide 5MQ=Type V Square Medium 5WQ=Type V Square Wide 5XQ=Type V Square Extra Wide SLL=90° Spill Light Eliminator Left SLR=90° Spill Light Eliminator Right	AP=Grey BZ=Bronze BK=Black WH=White A=Raw Aluminum Unfinished
<b>Options</b> (Add as Suffix)					<b>Accessories</b> (Order Separately)	
4=NEMA Twistlock Photocontrol Receptacle U=UL and cUL Listed K=Level Indicator 2L=Two Circuits <sup>5</sup> LCF=LightBAR Cover Plate Matches Housing Finish			R90=Optics Rotated Right 90° L90=Optics Rotated Left 90° 7060=70 CRI / 6000K CCT <sup>6</sup> 8030=80 CRI / 3000K CCT <sup>6</sup> HA=50°C High Ambient		OA/RA1016=NEMA Twistlock Photocontrol - Multi-Tap OA/RA1014=NEMA Twistlock Photocontrol - 120V OA1223=10kV Circuit Module Replacement OA/RA1013=Photocontrol Shorting Cap LB/HSS-21=Field Installed House Side Shield for "E" Light BARs <sup>7,8</sup> LB/HSS-07=Field Installed House Side Shield for "F" Light BARs <sup>7,8</sup>	

- NOTES:**
- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional support information.
  - Standard 4000K CCT and nominal 70 CRI.
  - 21 LED LightBAR powered at 350mA, 7 LED LightBAR powered at 1A.
  - Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems).
  - Low-level output varies by bar count specified. Consult factory. Not available with 347V or 480V. Requires quantity two or more light bars.
  - Consult factory for lead times and lumen multipliers.
  - Only for use with SL2, SL3, and SL4 distributions. Not available with L90 and R90 options.
  - One required for each light bar. Not available with L90 and R90 options.