

| | | | | | |
|-------------|--|-----------|--|------|--|
| Project | | Catalog # | | Type | |
| Prepared by | | Notes | | Date | |



Streetworks

USSL Petite Wall

Wall Mount Luminaire

Product Features



Interactive Menu

- Ordering Information [page 2](#)
- Mounting Details [page 3](#)
- Product Specifications [page 3](#)
- Energy and Performance Data [page 4](#)
- Control Options [page 5](#)

Product Certifications



Quick Facts


- Lumen packages range from 4,800 - 12,200 lumens (35W - 90W)
- Replaces 70W up to 250W HID equivalents
- Efficacies up to 146 lumens per watt
- Energy and maintenance savings up to 84% versus HID solutions
- Surface mount configuration with standard conduit entry

Connected Systems


- WaveLinX

Dimensional Details

Surface Mount (SM)

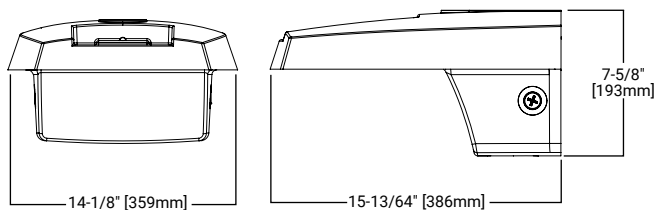

Wall Mount (WM)

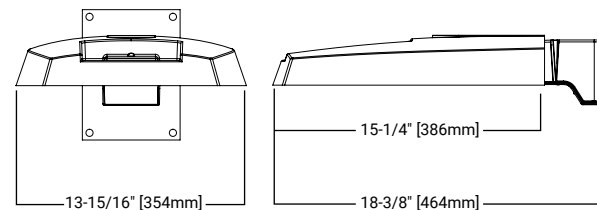

NOTES:

1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.


Ordering Information

SAMPLE NUMBER: **USSL-P-C15-D-UNV-T4-SM-BZ**


| Product Family ^{1,2} | Light Engine ³ | Driver | Voltage | Distribution | Mounting (Included) | Finish |
|--|--|---------------------------|--|---|--|--|
| USSL-P =USSL Petite BAA-USSL-P =USSL Petite BAA Compliant ²¹ TAA-USSL-P =USSL Petite TAA Compliant ²¹ | C014 =(1 LED) Approx. 40% Output C016 =(1 LED) Approx. 60% Output C018 =(1 LED) Approx. 80% Output C01 =(1 LED) Full Output | D =Dimming (0-10V) | U =Universal (120-277V) 9 =347V 8 =480V ⁴ DV =Duravolt, 277-480V ^{4,22} | T2 =Type II T3 =Type III T4 =Type IV T5 =Type V | SM =Surface Wall Mount WM =Wall Mount Arm | BZ =Bronze AP =Grey BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White |
| Options (Add as Suffix) | | | | Accessories (Order Separately) ^{17,18} | | |
| 7030 =70 CRI / 3000K CCT ⁵ 7050 =70 CRI / 5000K CCT ⁵ 10MSP =10kV MOV Surge Protective Device 10K =10kV/10kA UL 1449 Fused Surge Protective Device 20MSP =20kV MOV Surge Protective Device 20K =20kV UL 1449 Fused Surge Protective Device EBP =Emergency Battery Pack (Ambient Temp, 0° to 40°C) ⁶ CBP =Cold Weather Emergency Battery Pack (Ambient Temp, -20° to 40°C) ⁶ CBP-CEC =Cold Weather Emergency Battery Pack, CEC Compliant (Ambient Temp, -20° to 40°C) ⁶ HSS =House Side Shield ⁷ HA =50°C High Ambient Temperature ⁸ CC =Coastal Construction ⁹ BPC =Button Photocontrol ¹⁰ 4 =NEMA 3-PIN Twistlock Photocontrol Receptacle ¹⁰ 4N7 =NEMA 7-PIN Twistlock Photocontrol Receptacle ¹⁰ MS/DIM-L08 =Dimming Motion and Daylight Sensor, IR Remote Programmable, < 8' Mounting ^{10,11} MS/DIM-L20 =Dimming Motion and Daylight Sensor, IR Remote Programmable, 8' - 20' Mounting ^{10,11} MS/DIM-L40 =Dimming Motion and Daylight Sensor, IR Remote Programmable, 21' - 40' Mounting ^{10,11} SPB1 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, < 8' Mounting ^{10,12} SPB2 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, 8' - 20' Mounting ^{10,12} SPB4 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, 21' - 40' Mounting ^{10,12} ZW =Wavelinx-enabled 4-PIN Twistlock Receptacle ^{10,13,14} ZD =SR Driver-enabled 4-PIN Twistlock Receptacle ^{10,13,14} ZW-SWPD4XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{10,13,14,15,16} ZW-SWPD5XX =WaveLinX Pro, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{10,13,14,15,16} ZD-SWPD4XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{10,13,14,15,16} ZD-SWPD5XX =WaveLinX Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{10,13,14,15,16} | | | | HS/VERD =House Side Shield ⁷ VGS-F/B =Vertical Glare Shield, Front/Back VGS-SIDE =Vertical Glare Shield, Side OA/RA1013 =Photocontrol Shorting Cap OA/RA1014 =NEMA Photocontrol - 120V OA/RA1016 =NEMA Photocontrol - Multi-Tap 105-285V OA/RA1201 =NEMA Photocontrol - 347V OA/RA1027 =NEMA Photocontrol - 480V FSIR-100 =Wireless Configuration Tool for Occupancy Sensor ¹⁹ WOLC-7P-10A =WaveLinX Outdoor Control Module (7-PIN) ²⁰ SWPD4-XX =WaveLinX Wireless Sensor, 7' - 15' Mounting Height ^{13,15,16} SWPD5-XX =WaveLinX Wireless Sensor, 15' - 40' Mounting Height ^{13,15,16} | | |
| NOTES: 1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 2. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to installation instructions IB500002EN and pole white paper WP513001EN for additional support information. 3. Standard 4000K CCT and 70CRI. 4. 480V not to be used with ungrounded or impedance grounded systems. 5. Use dedicated IES files on product website for non-standard CCTs. 6. Only available on Surface Wall Mount (SM) mounting. Not available with C01 light engine. Not available with DV, 347, or 480 voltage options. 7. Option will come factory-installed. House Side Shield not suitable with T5 distribution. 8. Not available with EBP, CBP, or CBP-CEC options. Not available with C01 light engine. 9. Salt spray tested to over 5,000-hours per ASTM B117 with a scribe rating of 9 per ASTM D1654. Also achieves 7,000-hour rating per ASTM B117 with a scribe rating of 4 per ASTM D1654. Extended lead times may apply. 10. Option is not available with other controls: photocontrols (BPC), photocontrol receptacles (4 or 4N7), or controls systems (MS, ZD, or ZW). 11. Utilizes the Wattstopper sensor FSP-211. Sensor color white unless specified otherwise via PDR. 12. Utilizes the Wattstopper sensor FSP-3XX series. Sensor color determined by product finish. See Sensor Color Reference Table. Field-configures via mobile application. See Controls section for details. 13. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F). 14. For the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPOE-120 in appropriate quantities. Only compatible with WaveLinX system and software and requires system components to be installed for operation. See website for more Wavelinx application information. 15. Replace XX with sensor color (WH, BZ, or BK). 16. Requires 4-PIN twistlock receptacle (ZD or ZW) option. 17. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. 18. Replace XX with paint color. 19. This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information. 20. Requires 7-PIN NEMA twistlock photocontrol receptacle (4N7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS, ZD, or ZW). Operates on 120-347V input voltages. 21. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC.PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 22. DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit www.signify.com/duravolt for more information. | | | | | | |

Mounting Details


Surface Mount Plate (SM)

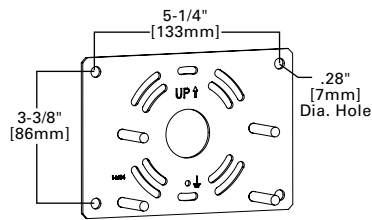

Surface Mount Assembly (SM)

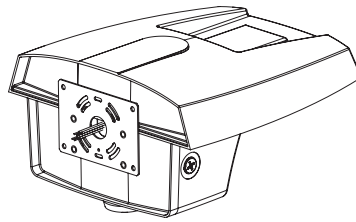

Wall Mount (WM)

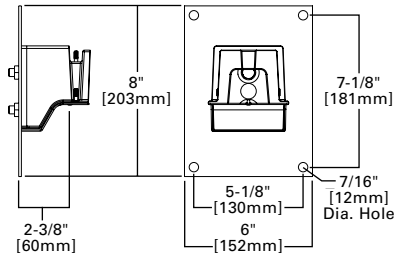

Product Specifications

Construction

- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door
- Surface Mount (SM) offers two 1/2" NPT conduit entry plugs
- Not suitable for inverted mount installation

Optics

- Dark Sky Approved (3000K CCT and warmer only)
- Precision molded polycarbonate optics

Electrical

- -40°C minimum operating temperature
- 40°C maximum operating temperature

- >.9 power factor
- <20% total harmonic distortion
- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture
- Three-position terminal block standard. Four-position terminal block with emergency battery pack options

Typical Applications

- Outdoor, Pedestrian Pathways, Building Entrances, Loading Docks, Perimeter Parking Lots

Finish

- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness

Shipping Data

- USSL Petite (with CBP): 21 lbs. (9.53 kgs.)

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Energy and Performance Data

Power and Lumens

| Product Family | | USSL Petite | | | |
|---------------------------------|---------------------------|-------------|----------|----------|----------|
| Light Engine | | C014 | C016 | C018 | C01 |
| Power (Watts) | | 35 | 49 | 73 | 94 |
| Input Current @ 120V (A) | | 0.29 | 0.41 | 0.61 | 0.79 |
| Input Current @ 277V (A) | | 0.13 | 0.18 | 0.27 | 0.35 |
| Input Current @ 347V (A) | | 0.11 | 0.16 | 0.23 | 0.29 |
| Input Current @ 480V (A) | | 0.08 | 0.12 | 0.17 | 0.22 |
| Distribution | | | | | |
| Type II | 4000K Lumens | 4,775 | 6,717 | 9,542 | 11,521 |
| | BUG Rating | B1-U0-G1 | B1-U0-G1 | B2-U0-G2 | B2-U0-G2 |
| | Lumens per Watt | 138 | 137 | 131 | 122 |
| | 3000K Lumens ¹ | 4,689 | 6,595 | 9,369 | 11,312 |
| Type III | 4000K Lumens | 4,782 | 6,727 | 9,556 | 11,538 |
| | BUG Rating | B1-U0-G2 | B1-U0-G2 | B2-U0-G3 | B2-U0-G3 |
| | Lumens per Watt | 138 | 137 | 131 | 123 |
| | 3000K Lumens ¹ | 4,695 | 6,605 | 9,383 | 11,329 |
| Type IV | 4000K Lumens | 4,880 | 6,865 | 9,752 | 11,774 |
| | BUG Rating | B1-U0-G2 | B1-U0-G2 | B2-U0-G3 | B2-U0-G3 |
| | Lumens per Watt | 141 | 140 | 134 | 125 |
| | 3000K Lumens ¹ | 4,792 | 6,740 | 9,575 | 11,561 |
| Type V | 4000K Lumens | 5,067 | 7,128 | 10,126 | 12,226 |
| | BUG Rating | B3-U0-G2 | B3-U0-G2 | B4-U0-G3 | B4-U0-G3 |
| | Lumens per Watt | 146 | 145 | 139 | 130 |
| | 3000K Lumens ¹ | 4,975 | 6,999 | 9,942 | 12,004 |

NOTES:
 1. For 3000K, 5000K or HSS data, refer to published IES files.

Power and Lumens: Emergency Configurations

| Product Family | | USSL Petite | | |
|-----------------------------------|--------------|-------------|------|------|
| Light Engine | | C014 | C016 | C018 |
| Power (Watts) ¹ | | 41 | 55 | 79 |
| Input Current @ 120V (A) | | 0.37 | 0.49 | 0.69 |
| Input Current @ 277V (A) | | 0.16 | 0.22 | 0.31 |
| Distribution ² | | | | |
| Type II | 4000K Lumens | 1,910 | | |
| | 3000K Lumens | 1,876 | | |
| Type III | 4000K Lumens | 1,913 | | |
| | 3000K Lumens | 1,878 | | |
| Type IV | 4000K Lumens | 1,952 | | |
| | 3000K Lumens | 1,917 | | |
| Type V | 4000K Lumens | 2,027 | | |
| | 3000K Lumens | 1,990 | | |

NOTES:
 1. Power and current based on full power consumption while EBP or CBP is charging.
 2. Estimated lumen outputs while luminaire is operating in emergency mode only at full charge.

Lumen Maintenance

| Configuration | TM-21 Lumen Maintenance (50,000 Hours) | Theoretical L70 (Hours) |
|---------------------|--|-------------------------|
| USSL Petite at 25°C | 91.30% | > 194,000 |
| USSL Petite at 40°C | 87.59% | > 134,000 |

Sensor Color Reference Table (SPBx)

| Housing Finish | Sensor Color |
|------------------------------|--------------|
| AP =Grey | Grey |
| BZ =Bronze | Bronze |
| BK =Black | Black |
| DP =Dark Platinum | Grey |
| GM =Graphite Metallic | Black |
| WH =White | White |

Lumen Multiplier




| Ambient Temperature | Lumen Multiplier |
|---------------------|------------------|
| 10°C | 1.02 |
| 15°C | 1.01 |
| 25°C | 1.00 |
| 40°C | 0.99 |

Control Options

0-10V This fixture provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (4 and 4N7) Photocontrol receptacles provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-PIN standards can be utilized with the 4N7 receptacle.

Dimming Occupancy Sensor (SPB, MS/DIM-LXX and MS-LXX) These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the luminaire will dim down after five minutes of no activity detected. When activity is detected, the luminaire returns to full light output. When a sensor for ON/OFF operation (MS-LXX) is selected, the luminaire will turn off after five minutes of no activity. These occupancy sensors include an integral photocell for “dusk-to-dawn” control or “daylight harvesting.” Factory default is enabled for the MS sensors and disabled for the SPB. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes.

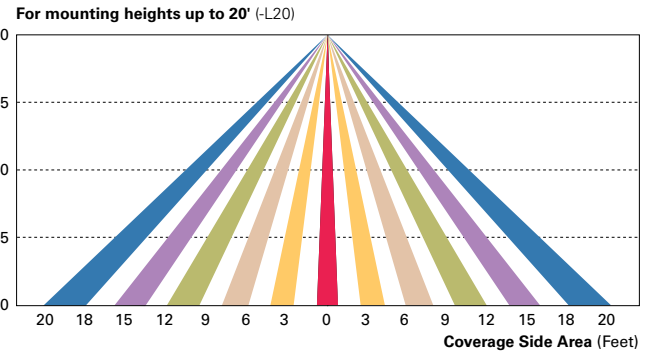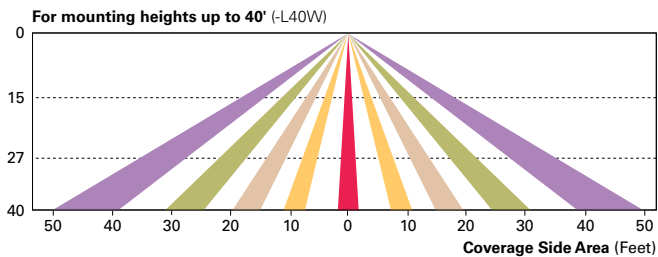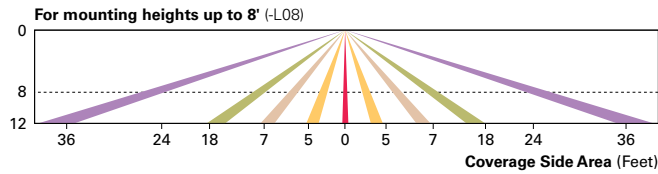

WaveLinx Wireless Control and Monitoring System Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets).

WaveLinx Outdoor Control Module (WOLC-7P-10A) A photocontrol that enables astronomical or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

WaveLinx Wireless Sensor (SWPD4 and SWPD5) These outdoor sensors offer passive infrared (PIR) occupancy sensing and a photocell for closed-loop daylight sensing. These sensors can be factory installed or field-installed via simple, tool-less integration into luminaires equipped with the Zhaga Book 18 compliant 4-PIN receptacle (ZD or ZW). These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected, and the photocell for “dusk-to-dawn” control is default enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-40'.

