

Streetworks

UTLD Traditionaire

PA Series Upgrade - January 2021

The Traditionaire LED outdoor luminaire displays the old-fashioned charm of traditional area lighting, enhancing any setting with distinctive styling. The high-lumen downlight configuration uses discrete LEDs with patented AccuLED Optics technology to deliver uniform and efficient illumination to pedestrian and roadway applications.

Feature Highlights

- Die-cast aluminum construction; IP66 rated; 3G vibration rated
- Up to 141 lumens per watt
- Lumens: 2,000 to 11,000; 9 lumen packages
- Color Temperatures: 2700K (70 CRI or 80 CRI), 3000K (70 CRI), 4000K (70 CRI), 5000K (70 CRI), and Amber (590nm)

Certifications



UTLD

UTLD Decorative Post Top Nomenclature Transition Cross-Reference

EXISTING	
Sample Numbers:	UTLD-AF24-30-D-U-T3-4N7-7030
Prefix	Description
UTLD	Traditionaire LED Downlight
Light Engine	Description
AF24	(1) Existing Light Panel Generation "AF"
Color Temperature	Description
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
Voltage	Description
U	Universal (120-277V)
347	347V
_____	_____
_____	_____
Distribution	Description
_____	No changes
Lens	Description
_____	No changes
Finish	Description
_____	No changes

NEW	
Sample Numbers:	UTLD-PA1-30-730-U-T3-BK-10K-PR7
Prefix	Description
UTLD	Traditionaire LED Downlight
Light Engine	Description
PA1	(1) New Light Panel
Color Temperature	Description
722	70 CRI / 2200K CCT
727	70 CRI / 2700K CCT
730	70 CRI / 3000K CCT
740	70 CRI / 4000K CCT
750	70 CRI / 5000K CCT
827	80 CRI / 2700K CCT
AMB	Amber 590nm
Voltage	Description
U	Universal (120-277V)
2	208V
8	480V
9	347V
Distribution	Description
_____	No changes
Lens	Description
_____	No changes
Finish	Description
_____	No changes

UTLD Decorative Post Top Nomenclature Transition Cross-Reference

EXISTING	
Basic Options	Description
7030	70 CRI / 3000K CCT
7040	70 CRI / 4000K CCT (default)
7027	70CRI / 270K CCT
Options (Add as Suffix)	Description
10K	Series 10kV UL 1449 Surge Protective Device
20K	Series 20kV UL 1449 Surge Protective Device
_____	_____
10MSP	Parallel 10kV MOV Surge Protective Device
20MSP	Parallel 20kV MOV Surge Protective Device
HA	50°C High Ambient Temperature
HSS	Factory Install House Side Shield
_____	_____
_____	_____
_____	_____
_____	_____
4	NEMA Photocontrol Receptacle
4N7	NEMA 7-Pin Twistlock Photocontrol Receptacle
Accessories	Description
OA / RA1013	Photocontrol Shorting Cap
OA1223	10kV Surge Module Replacement
OA/RA1014	NEMA Photocontrol - 120V
OA/RA1016	NEMA Photocontrol - Multi-Tap
OA/RA1027	NEMA Photocontrol - 480V
OA/RA1201	NEMA Photocontrol - 347V
TA1BK	Decorative Ladder Rest for Field Installation (Black)
HS-UTLD-24	Field Installed UTLD House Side Shield for AF24
VGS-ARCH	Short Vertical Drop Shield
VGL-ARCH	Long Vertical Drop Shield

NEW	
CRI/CCT	Description
Moved Color Temperature to above	

Options (Add as Suffix)	Description
10K	Series 10kV UL 1449 Surge Protective Device
20K	Series 20kV UL 1449 Surge Protective Device
20KI	Series 20kV UL 1449 Surge Protective Device with light indicator
10MSP	Parallel 10kV MOV Surge Protective Device
20MSP	Parallel 20kV MOV Surge Protective Device
HA	50°C High Ambient Temperature
HSS	Factory Install House Side Shield
PSC	Photocontrol Shorting Cap
NPC	NEMA Photocontrol - Multi-Tap
LLPC	Longlife Photocontrol Included

Controls and Systems Options (Add as Suffix)	
PR	NEMA Photocontrol Receptacle
PR7	NEMA 7-Pin Twistlock Photocontrol Receptacle

Accessories	Description
OA / RA1013	No Changes
OA1223	No Changes
OA/RA1014	No Changes
OA/RA1016	No Changes
OA/RA1027	No Changes
OA/RA1201	No Changes
TA1BK	No Changes
HS-UTLD-24	No Changes
VGS-ARCH	No Changes
VGL-ARCH	No Changes

SELLING TOOLS

Please visit the product pages for the following:


- New IES files
- New spec sheets
- Updated product configurator

UTLD Traditionaire Decorative Post Top Luminaire

Thank you and happy selling!

Bryan Andrews

Marketing Manager, Streetworks

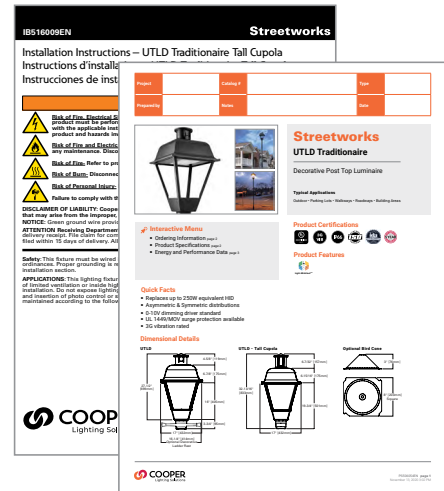

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.