



Exit/Emergency



Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Example: S18LH6WICT

Series	Battery/Wattage	Lamp Type	Housing Color	Model Designator	Options ²
S – 6 V, Symmetry Series Thermoplastic Emergency Lighting Unit	Lead Calcium 18L – 18 W Unit ⁵ 25L – 25 W Unit ⁵ 36L – 36 W Unit 50L – 50 W Unit 72L – 72 W Unit	6 V H6 – Halogen 6 W H7 – Halogen 7 W H10 – Halogen 10 W H12 – Halogen 12 W	W – White B – Black	IC – Intelli-Charge Diagnostics	A – Ammeter ACF – 120/277 VAC Input Fuse ACP – 120/277 VAC Power Switch DCP – DC Battery Disconnect Switch DL – Damp Location Listing ⁴ EX – Special Input Transformer ³ (specify voltage & frequency) T – Self-Testing Diagnostics (non-audible) TA – Audible Self-Testing Diagnostics TD – Time Delay ³ TP – Torx Tamperproof Hardware, Includes Bit V – Voltmeter
S21 – 12 V, Symmetry Series Thermoplastic Emergency Lighting Unit	Nickel Cadmium 25N – 25 W Unit 50N – 50 W Unit	12 V T12 – Halogen 12 W bi-pin H12F – Halogen 12 W MR16 Flood H20F – Halogen 20 W MR16 Flood H20S – Halogen 20 W MR16 Spot			
		12 V LED M7 – LED 7 W MR16 Flood			

Accessories⁶ (Order Separately)

- ICIR – Intelli-Charge Infra-Red Remote
- PCS1 – Polycarbonate Vandal Shield
- WG5 – Wire Guard
- SUMK – Universal Mounting Kit for Columns, Poles and I-beams
- T15TPTOOL – Tamperproof Driver and Bit

Footnotes

- ¹ 12 VDC models only available in 36, 50 and 72 W lead calcium, 25 and 50 W nickel cadmium.
- ² Some option combinations may impact UL listing. Consult factory for specifics.
- ³ 15 minute delay.
- ⁴ 72 W units not available with DL option.
- ⁵ 18 and 25 W lead units not available in 12 V models.
- ⁶ Consult Signify to confirm whether specific accessories are BAA-compliant.

codes and standards

- UL listed to Standard 924 : 65°F (19°C) to 85°F (30°C) .
- UL damp location listing optional . Damp Location: 32°F (0°C) to 104°F (40°C)
- IBC , BOCA , and OSHA illumination standard
- NFPA 70 (National Electric Code)
- NFPA 101 (Life Safety Code)

construction

- The Symmetry Series is constructed of impact-resistant polycarbonate .
- The one-piece housing is provided with a universal knockout pattern for easy installation to standard junction boxes .

installation

- Keyhole slot knockouts are provided for additional mechanical support to wall surfaces .
- A modular quick-connect plug-in wiring harness will allow line voltage connections in either the junction box or the product housing .
- An optional mounting plate and strapping kit (SUMK) may be used to mount the product to columns , poles and I-beams .

electronics

- 120/277 VAC dual voltage input with surge protection is standard on all models .
- Self powered models feature the Intelli-Charge circuit where the charging system is microprocessor driven with software embedded diagnostic routine and temperature compensation .
- Self powered models include brownout detection , AC lockout , low voltage disconnect , AC power indicator , charge status indicator , audible user-interface controls , visual LED system fault indicator , and tactile push-to-test switch .
- Additional equipment safety features include reverse battery polarity detection and protection , and reverse utility power detection and protection .
- All self-powered models include an on board IR receiver for use with the optional hand held remote (ICIR) .
- Optional self-testing electronics
 The diagnostic/charging platform with optional self-testing mode automatically runs a one minute self-test every 30 days and a 30 minute test on the sixth and twelfth month in accordance with NFPA 101 .
- A one-minute or 90 minute test may be initiated via the push to test switch on the unit or by activating the appropriate test command on the optional IR test device .
- Power Consumption
 6 VDC Models : (120 VAC) 0 . 139 A , (277 VAC) 0 . 060 A
 12 VDC Models : (120 VAC) 0 . 288 A , (277 VAC) 0 . 125 A



SU Symmetry series spec grade polycarbonate unit

18W-72W

lamps

- An assortment of high performance bi pin halogen or MR16 halogen lamps are available to meet your specific egress needs .
- Each lamp reflector system can be adjusted 180° vertically and 90° horizontally .
- 12 V models are available with LED MR16 retrofit lamps .

battery

- Maintenance free sealed lead calcium with an operating range of 65°F (19°C) to 85°F (30°C) .
- Maintenance free nickel cadmium battery with operating temperature range 65°F (19°C) to 85°F (30°C) .
- Provides a minimum of 90 minutes of emergency power .


warranty

- Five full year warranty on electronics and unit (excluding lamps) .

options

- **A** – The ammeter option includes an analog meter electrically connected to the charging circuit for visual reference and indication of the current level being delivered to the battery .
- **ACF** – The AC fuse option includes an in line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes .
- **ACP** – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer . This option allows for opening the utility feed to the equipment for servicing or maintenance .
- **DCP** – The DC power switch includes a toggle switch electrically connected between the battery and lamp load in order to prevent unwanted battery discharge or for prolonged periods of power outage not deemed an emergency .
- **DL** – Damp location listed products include various levels of corrosion protection on printed circuit board assemblies and other metallic parts . Environmental testing throughout a range of ambient temperature and 88% relative humidity .
- **EX** – The special input transformer option allows for input voltage and frequencies beyond the standard 120/277 VAC . 60 Hz input .
- **T** – The self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one minute test once a month with a 30 minute test performed on the sixth and twelfth month in accordance with NFPA 101 . Equipment readiness faults are indicated with a visual LED display .
- **TA** – The audible self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one minute test once a month with a 30 minute test performed on the sixth and twelfth month in accordance with NFPA 101 . Equipment readiness faults are indicated with a visual LED display and an audible alarm .
- **TD** – The time delay circuit causes the emergency lighting equipment to remain under battery power for a period of 15 minutes after the utility power has been restored .
- **TP** – The tamperproof option provides torx T15 hardware with center pin reject and the bit required to secure and access the equipment for future servicing .
- **V** – The voltmeter option includes an analog meter electrically connected between the battery and lamp load for visual reference and indication of the battery terminal voltage when the equipment is operating in the emergency mode .

dimensions

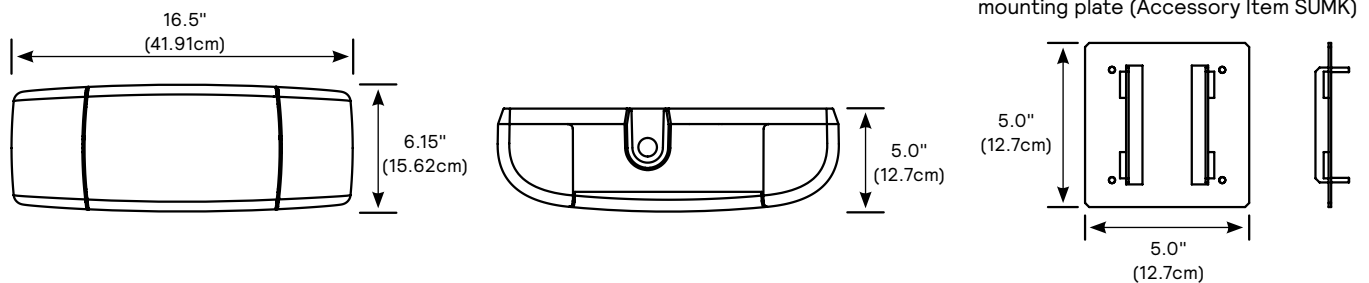


SU Symmetry series spec grade polycarbonate unit

18W-72W

performance

Meets Life Safety Code illumination standard; average of 1.0 FC, no point less than 0.1 FC, max to min ratio of 40:1. Assumes open space with no obstructions, mounting height: 7.5' and reflectances: 80/50/20. Analysis based on independently tested photometrics.

Wall mounted 7.5' AFF, 6' Corridor, Model S25LH12WIC Represented
1 FC Average

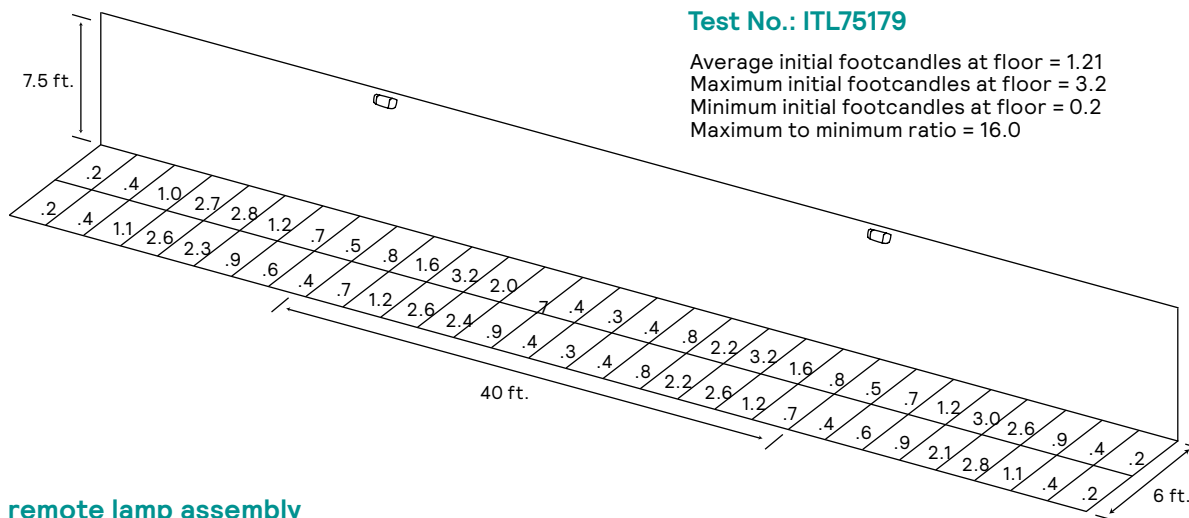

remote lamp assembly



6V
SRH6W - 6 V, 6 W, Halogen Bi-Pin
SRH7W - 6 V, 7 W, Halogen Bi-Pin
SRH10W - 6 V, 10 W, Halogen Bi-Pin
SRH12W - 6 V, 12 W, Halogen Bi-Pin

12V
SR2T12W - 12 V, 12 W, Halogen Bi-Pin
SR2H12FW - 12 V, 12 W, Halogen MR16 Flood
SR2H20FW - 12 V, 20 W, Halogen MR16 Flood
SR2H20SW - 12 V, 20 W, Halogen MR16 Spot
SR2M7FW - 12 V, 7 W, LED MR16 Flood

For black backplate & lamp heads, replace the 'W' with a 'B'. Example = SRH6B

Buy American Act of 1933 (BAA):

This product is manufactured in one of our US factories and, as of the date of this document, this product was considered a commercially available off-the-shelf (COTS) item meeting the requirements of the BAA. This BAA designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies. Prior to ordering, please visit www.signify.com/baa to view a current list of BAA-compliant products to confirm this product's current compliance.



© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
 200 Franklin Square Drive,
 Somerset, NJ 08873
 Telephone 855-486-2216

Signify Canada Ltd.
 281 Hillmount Road,
 Markham, ON, Canada L6C 2S3
 Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.