
Milan 13 Bath

1.0

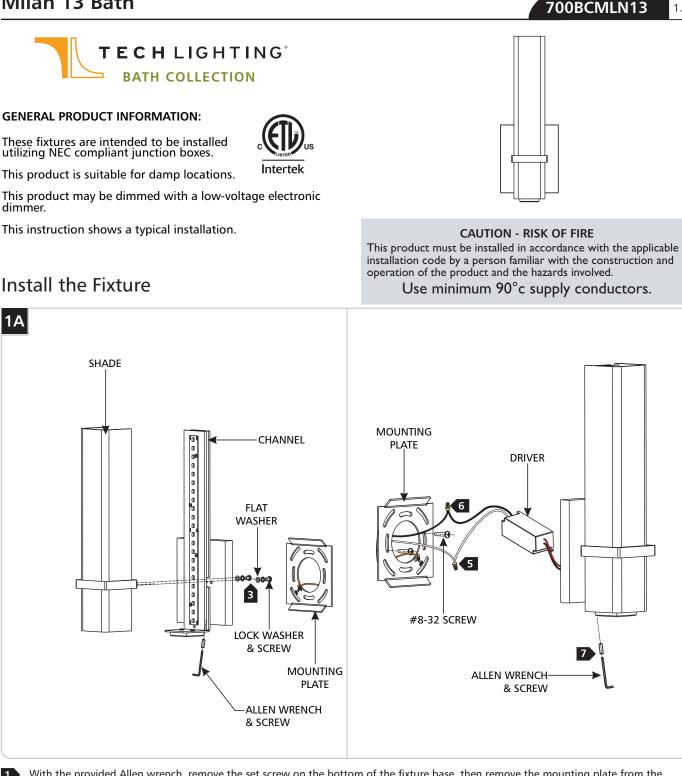

With the provided Allen wrench, remove the set screw on the bottom of the fixture base, then remove the mounting plate from the fixture base

2 Install the mounting plate to the junction box with the two #8-32 screws provided.

3 Slide the shade through the channel and secure to the fixture using the flat washers, lock washers, and screws as shown.

Connect the fixture to a suitable ground in accordance with local electrical codes. 4

5 Connect the white driver wire to the neutral power line.

6 Connect the black driver wire to the hot power line.

7

Properly place the driver, all wires. and wire nut connections into the junction box, then mount the fixture back onto the mounting plate and reinstall the set screw (reversal of step 1A).

SAVE THESE INSTRUCTIONS!



www.techlighting.com © 2018 Tech Lighting, L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company