


Vetra Ceiling**700FMVTR****1.0****VISUAL COMFORT & Co.****MODERN COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

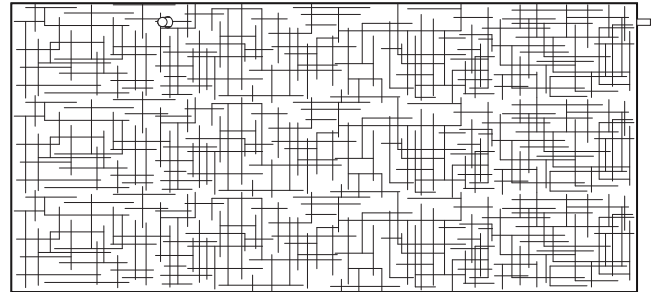
**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

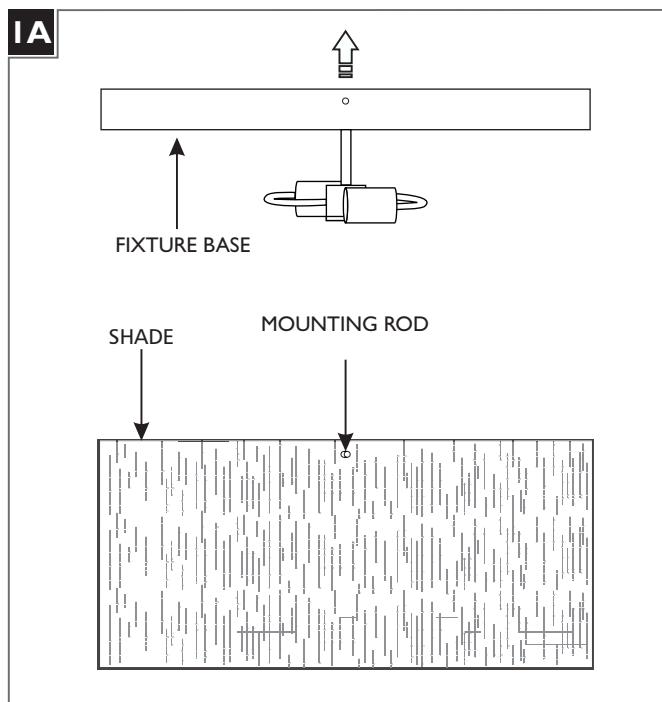Install the Mounting Plate

- 1** Remove the three mounting rods by hand and separate the shade from the fixture.

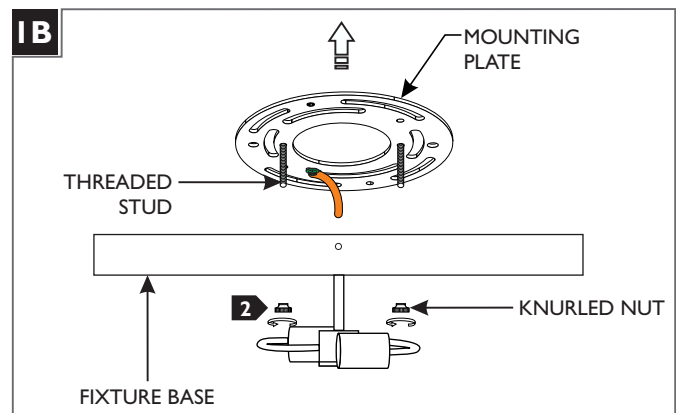


- 2** Remove the mounting plate from the fixture by unscrewing the two knurled nuts from the two threaded studs.

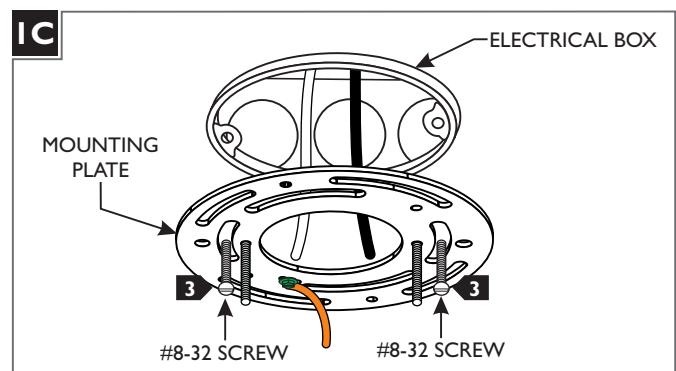

- 3** Mount the mounting plate to the electrical box with the two #8-32 screws.


Install the Fixture

2A

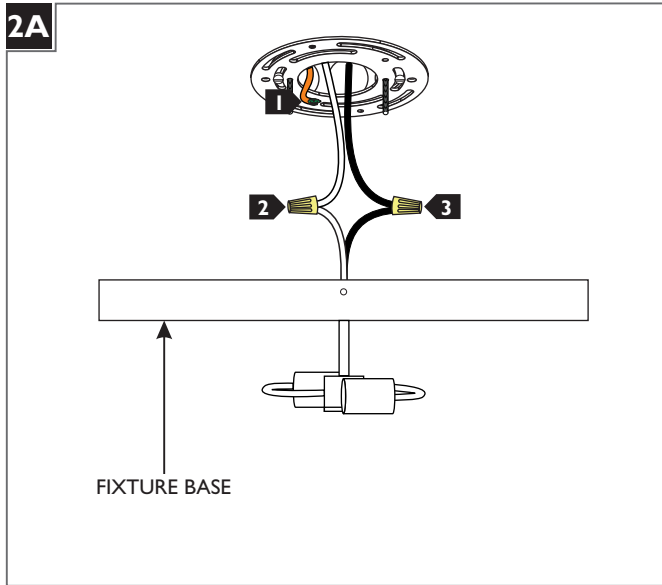


- 1 Connect the mounting plate ground wire to a suitable ground in accordance with local electrical codes.
- 2 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire to the hot power line wire with a wire nut.

2B

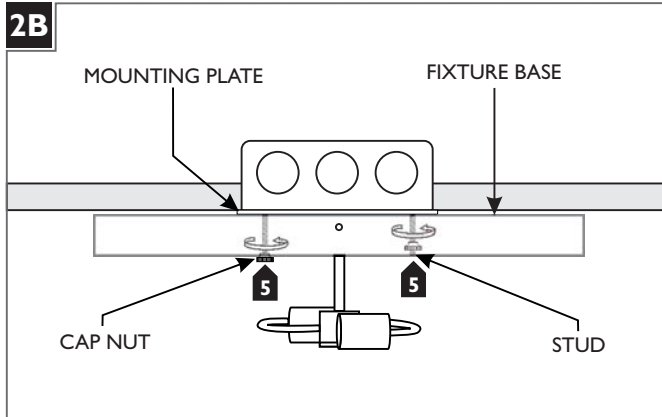

- 4 Properly place all wires and wire nut connections into the fixture.
- 5 Mount the fixture onto the threaded studs on the mounting plate and secure it by tightening the two cap nuts.

2C

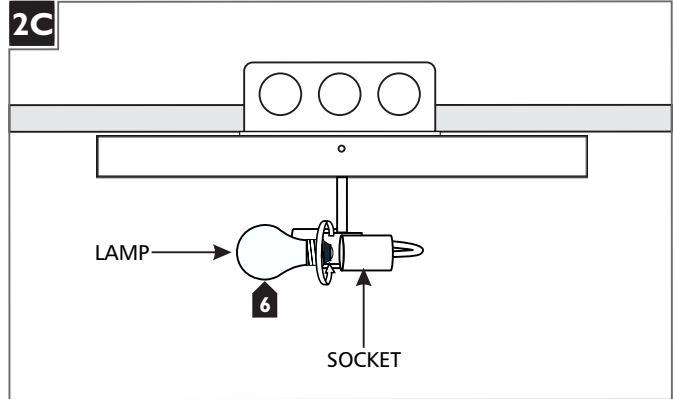


CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

Refer to fixture marking for lamp information.

- 6 Screw the lamps into the sockets.

2D

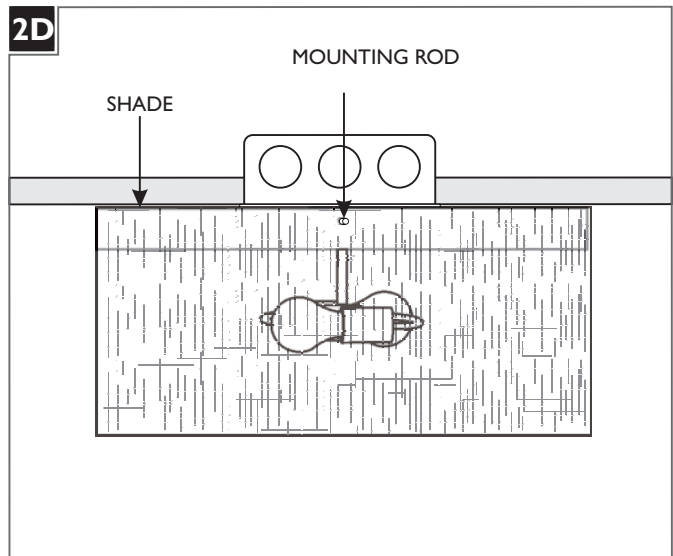

- 7 Align the shade with the fixture base and re-install the three mounting rods by hand.

SAVE THESE INSTRUCTIONS!