# UNILUME LED DIRECT WIRE

TECH LIGHTING®

## PRODUCT FEATURES

· A low-profile solution for task lighting great for residential and commercial spaces.

· Link up to 70 units together with a connector (not included).

· Available in four sizes (6", 12", 18", 30") and two finishes (black and white).

· Standard on/off switch.

· An optional occupancy sensor and color temperature/ CRI options.

· Protected by a 5-year warranty. Please visit the "About Us" page on techlighting.com for more for warranty details.

## LAMPING

With four convenient lengths, the ability to power up to 70 linked units from a power connection, a standard on/off switch, a reliable integrated driver, an optional occupancy sensor and color temperature/CRI options; Unilume LED Direct Wire is perfect for residential or commercial use.

7" BLACK
(SHOWN ON)

13" WHITE
(SHOWN OFF)

19" BLACK
WITH OCCUPANCY SENSOR
(SHOWN ON)

30" WHITE
(SHOWN OFF)

## ORDERING INFORMATION

| 700UCFDW | LENGTH | CRI | CCT | FINISH | LAMP TYPE | OCCUPANCY SENSOR |
|---|---|---|---|---|---|---|
| | 07  7.2" | 9  90 CRI | 2  2700K | B  BLACK | -LED  LED | NONE |
| | 13  12.2" | | 3  3000K | W  WHITE | | -OCS  WITH OCCUPANCY SENSOR* |
| | 19  18.2" | | 5  3500K | | | |
| | 30  30.2" | | | | | |

*INTEGRATED OCCUPANCY SENSOR ONLY AVAILABLE ON 13", 19" AND 30".

700UCFDW  _____  _____  _____  _____  _____  _____

JOB NAME  _____

NOTES  _____
_____

# UNILUME LED DIRECT WIRE

TECH LIGHTING®

## DIMENSIONS

|  | 7" | 13" | 19" | 30" |
|---|---|---|---|---|
| HEIGHT | 1.3" | 1.3" | 1.3" | 1.3" |
| WIDTH | 3.7" | 3.7" | 3.7" | 3.7" |
| LENGTH | 6.2" | 12.2" | 18.2" | 30.2" |
| NET WEIGHT | 1.5 | 2.5 | 3.5 | 5 |

6.2"
157 mm

12.2"
310 mm

18.2"
462 mm

30.2"
767 mm

1.3"
33 mm

3.7"
94 mm
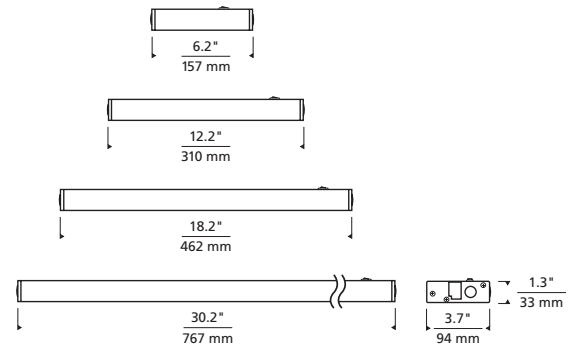
## LAMPING SPECIFICATIONS

|  | 7" | 13" | 19" | 30" |
|---|---|---|---|---|
| INTEGRATED LED | Yes | Yes | Yes | Yes |
| DELIVERED LUMENS | 240 | 527 | 693 | 1224 |
| WATTS | 4W | 8.5W | 10.5W | 18W |
| EFFICACY | | | | |
| MAX WATTAGE | 4W | 8.5W | 10.5W | 18W |
| INPUT VOLTAGE | 120V | | | |
| DIMMING TYPE* | ELV | | | |
| CCT | 2700K, 3000K or 3500K | | | |
| CRI | 90 | | | |
| LED LIFETIME | 50,000 hours to 70% | | | |
| FIELD SERVICEABLE LED | No | | | |
| LAMP BASE | Integrated LED | | | |
| LAMP INCLUDED? | Yes | | | |
| WARRANTY** | 5 years | | | |

*Dimming information available at www.techlighting.com/Downloads#dimming
**Visit techlighting.com for specific warranty limitations and details.

## SPECIFICATIONS

| | |
|---|---|
| HARDWARE MATERIAL | Aluminum |
| SHADE MATERIAL | Glass |
| DAMP LISTED | Yes |
| MOUNTING DETAILS | |
| GENERAL LISTING | ETL |
| INCLUDES | Integrated occupancy sensor only available on 13", 19" and 30" |

## T20/T24 INFORMATION

|  | INTEGRATED LED | REPLACEMENT LED LAMP | NO LAMP* |
|---|---|---|---|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 **Title 24** Part 6. | Yes | | |
| This product meets California Appliance Efficiency Standards 2016 **Title 20** and may be shipped to and sold in California. | Yes | | |

*If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.