


TL SERIES

Aluminum LED Area Lights

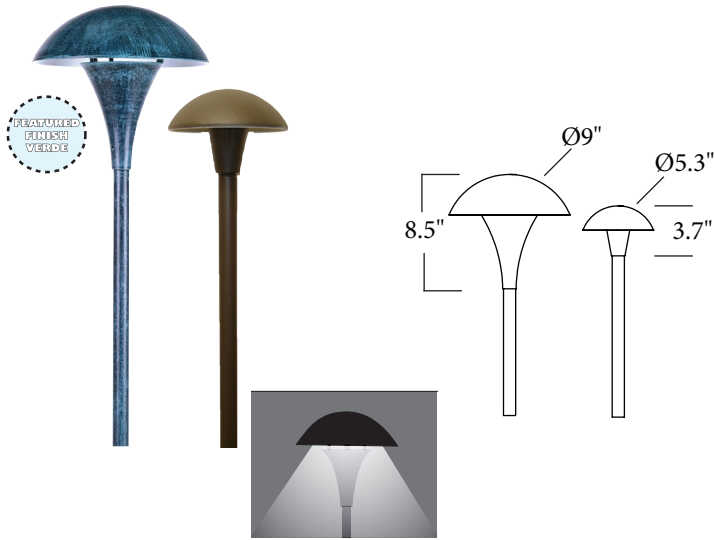

ORDERING INFORMATION

Description	Part Number
12W, 24V, 12" STEM, 6" TOP	TLMAL-SLED- (A)
12W, 24V, 18" STEM, 6" TOP	TLMAL18-SLED- (A)
12W, 24V, 12" STEM, 6" TOP, BRASS	TLMAL-SLED-BR- (A)
12W, 24V, 18" STEM, 6" TOP, BRASS	TLMAL18-SLED-BR- (A)
12W, 24V, 18" STEM, 9" TOP	TLLMAL-SLED- (A)
12W, 24V, 18" STEM, 9" TOP BRASS	TLLMAL-SLED-BR- (A)

Option Codes

(A) Finish

BK - Black
 BZ - Bronze
 GR - OD Green
 WH - White
 SP - Special

All part numbers shown here include an integral LED Driver. A separate transformer is needed to operate fixture (see accessories).

DESIGN

The TLMA and TLLMA LED Path Lights feature the elegant look of a mushroom top. The wide selection of finishes available allows this fixture to subtly blend into any landscape or lawn design. Cast Brass versions are available for harsh environments.

ACCESSORIES



LOW VOLTAGE TRANSFORMERS
 GILV100¹ (100W)
 GILV150¹ (150W)
 GILV300¹ (300W)



18 GAUGE LEAD WIRE
 PSJ183^{2,3}



DIGITAL TIMER
 TLHB800RCH

TECHNICAL INFORMATION

Constructed of die cast aluminum or brass, it comes standard with a 12" or 18" tall, 1/2" NPT stem, and mounting stake. Available with either a 6" or 9" diameter centered mushroom top. Provided with a 3' long 18 ga. whip and low voltage connector. A 12W single source LED provides approximately 365 lumens of warm white light. The fixture is finished with a durable polyester powdercoat paint.

Notes: 1-Consult the LED Load Chart at the end of this section for additional system design information. 2-Techlight recommends its PSJ lead wire be used as it is color coded to match driver and fixture leads. 3-Order in 1 foot increments.