

VISION-3 LIGHTING

Path Light **MODEL PA1**
 12/120V, 4W Integral LED
 12/120V, 3W T3 Bi-pin LED

Specifications:

Construction

Aluminum, brass, or stainless steel with 18-8 stainless steel hardware. Also available with copper shade (all other components brass).

Stem

Stems machined from 6061-T6 aluminum, C36000 brass, or 304 stainless steel and are available in lengths of 6", 12", 18", 24", 30", 36", 42" and 48".

Finish

TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged. Stainless steel model available in

three additional metal finishes: Natural, Polished, and Brushed. Copper model available in Natural finish only.

Lens

1/8" wall tempered borosilicate tube, secured to cap with a high temperature, UV curing silicone adhesive. Available with clear or frosted finish.

Lamp

Integral LED: 12 VAC, 4W LED module with integral driver. LED module features patented LEDSense® thermal management, an input voltage range of 9.6 to 14.4 VAC, an L70 of 60,000 hrs., a CRI > 80, and compatibility with magnetic and low load electronic transformers (see Transformer Compatibility List). Note: LED is not dimmable. LED module is not field replaceable.

T3 Bi-pin LED: 12 VAC/DC, 3W (330lm) T3 LED with an input range of 9 to 15 VAC/DC, a CRI > 80, field

replaceable, has a rated life span of 25,000 hrs, dimmable, and compatible with magnetic and low load electronic transformers (see LED specification sheet for transformer and dimmer compatibility information).


Electrical

Supplied standard with 24" of 16-2 cable beyond stem for connection to a remote low voltage power supply. Also available with integral 120V, 60VA low load electronic transformer in certain mount options.

Certification

CSA tested & certified to US and Canadian safety standards for wet location landscape use per UL1838 and UL1598.

All ratings subject to change without notice. See web site or contact V3 for most current info.

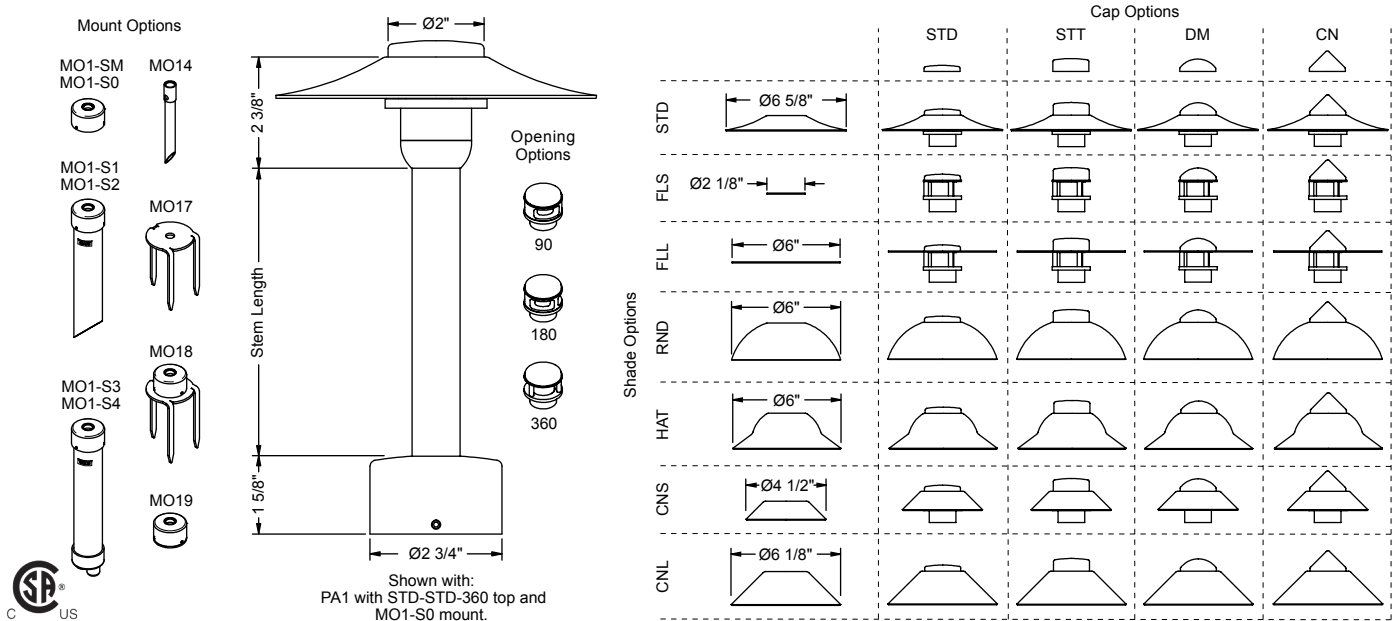

Ordering Information:

Model	Finish	Cap	Shade	Opening	Lens	Mount ²	Input Voltage	Stem	Lamp
PA1A - Aluminum	BL - Black	STD - Standard	STD - Standard	360 - 360°	CL - Clear	SN - Nipple Only (No Mount & No Cap) ⁴	12 - 12 Volt	6 - 6" Stem	0G4 - None (w/ G4 socket)
PA1B - Brass	BLT - Textured Black	STT - Standard (Tall)	FLS - Flat (Small)	180 - 180°	FR - Frosted	MO1-S0 - No Mount (MO1 Cap Only, 36" max. stem)	120 - 120 Volt ³	12 - 12" Stem	Integral LED: ⁶
PA1C - Copper ⁵	BN - Bronze	DM - Dome	FLL - Flat (Large)	90 - 90°		MO1-SM - MO1 Surface Mount (36" max. stem)		18 - 18" Stem	131 - 4W, 3000K
PA1S - Stainless ¹	BNT - Textured Bronze	CN - Cone	RND - Round			MO1-S1-12 - 12" MO1 Stake Mount (36" max. stem)		24 - 24" Stem	T3 Bi-pin LED: ⁶
	BAT - Textured Bark		HAT - HAT			MO1-S1-18 - 18" MO1 Stake Mount (36" max. stem)		30 - 30" Stem	150 - 3W, 2700K
	WI - White		CNS - Cone (Small)			MO1-S2-12 - 12" MO1 Adjustable Stake Mount (12" stem only)		36 - 36" Stem	151 - 3W, 3000K
	GRT - Textured Green		CNL - Cone (Large)			MO1-S2-18 - 18" MO1 Adjustable Stake Mount (18" stem only)		42 - 42" Stem	
	SI - Silver					MO1-S2-24 - 24" MO1 Adjustable Stake Mount (24" to 48" stems only)		48 - 48" Stem	
	GY - Grey					MO1-S3-12 - 12" MO1 Junction with Transformer (36" max. stem)			
	BE - Beige					MO1-S3-18 - 18" MO1 Junction with Transformer (36" max. stem)			
	GNT - Textured Granite					MO1-S4-12 - 12" MO1 Junction Mount (36" max. stem)			
	SAT - Textured Sand					MO1-S4-18 - 18" MO1 Junction Mount (36" max. stem)			
	PAT - Textured Patina					MO14 - MO14 Brass Stake Mount (24" max. stem)			
	EAT - Textured Earth					MO17 - MO17 Spike Mount (24" max. stem)			
	CLA - Clear Anodized (PA1A only)					MO18 - MO18 Spike Mount w/ Cap (24" max. stem)			
	NAT - Natural (PA1B, PA1C, & PA1S only)					MO19 - MO19 Surface Mount w/ Cap (Not available with PA1S, 36" max. stem)			
	POL - Polished (PA1B & PA1S only)								
	AGE - Aged (PA1B only)								
	BRU - Brushed (PA1S only)								

- Notes:**
- PA1S model only available with STD cap, STD shade, and 360 opening options.
 - See mount spec. sheets for mount details.
 - 120 Volt option only available with the MO1-S3 mount options.
 - SN mount option requires that a separate mount be used.
 - PA1C only available in NAT finish. Only shade is copper, all other components brass.
 - Integral LED lamp options available in other color temperatures and / or CRI's (contact V3 for info). Integral LED module is not dimmable or field replaceable.
 - Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: PA1A - PAT - STD - STD - 360 - FR - MO1-S3-12 - 120 - 12 - 131