





# OUTDOOR POST FIXTURE 115/116

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

VOLTAGE \_\_\_\_\_

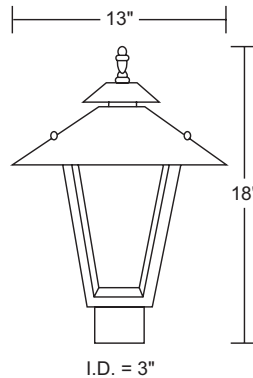

Wave Lighting's 115/116 adds a welcoming look to any outdoor space. This fixture can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. Wave Lighting's 115/116 fits on a 3" diameter pole (sold separately) mounting hardware is included.

## LED SOURCE OPTIONS

### LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L<sub>70</sub>
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty

### E26 REPLACEABLE LED - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L<sub>70</sub>
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty

### REPLACEABLE LED CORN COB - LC

- 100-277V, 50/60Hz
- 250W Metal Halide Equivalent Lamp Included
- E39 Mogul Base Socket
- Estimated 50,000 Hrs L<sub>70</sub>
- Surge Supression
- Available in 4000K CCT 80CRI
- Type 3, Type 5, or Dark Sky Distribution
- 5 Year Warranty
- DLC Listed Lamps in LC5 & LC3 Models Only\*

### HIGH PRESSURE SODIUM - 70H

- HPF Integral Magnetic Ballast, 120V
- 70W Lamp Included
- 4kV Medium Base Socket
- 1 Year Warranty

## CALL FOR PHOTOMETRIC INFORMATION



## SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Clear, Amber or Frosted Acrylic Diffuser
- Post Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

## GUIDE: 115C-LR12W

ITEM #	GLOBE/JAR	LIGHT SOURCE	
<b>115</b> -White <b>116</b> -Black	<b>ACRYLIC</b> Clear Beveled <b>A</b> -Amber Beveled Diamond <b>C</b> -Clear Beveled Diamond <b>F</b> -Frosted Beveled	<b>INCANDESCENT</b>	
		(1) 75W MAX Medium Base	
		<b>HIGH PRESSURE SODIUM</b>	
		<b>70H</b> -(1) 70W 4Kv Medium Base ☆	
		<b>LED LIGHT SOURCE</b>	
		<b>LIGHTWAVE LED</b>	<b>CCT</b> <b>C</b> -4K <b>W</b> -3K
		<b>LR12</b> -13W 1000lm 80CRI <b>LR15</b> -15W 1400lm 80CRI <b>LR22</b> -23W 1900lm 80CRI <b>LT12</b> -12W 1040lm 90CRI <b>LT15</b> -16W 1400lm 90CRI <b>LT22</b> -24W 2020lm 90CRI	
		<b>E26 REPLACEABLE LED</b>	
		<b>LE26</b> -10W 800lm ☆	
		<b>REPLACEABLE LED CORN COB</b>	<b>C</b> -4K
		<b>LC5</b> - 24W 3120lm Type 5 ☆	
		<b>LC3</b> - 20W 3000lm Type 3 ☆	
		<b>LCD</b> - 24W 2400lm Dark Sky ☆	

\*LC5 models use DLC Listed lamp #GKS28-24W-02D3 E39 (4000K) & LC3 models use DLC Listed lamp #GKS38-20W [E;EX]39 (4000K) ☆ Lamp Included