

CEILING MOUNT




GUIDE: 156FM-LR12C-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	
156FM	POLYPROPYLENE Frosted	POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET		
		INCANDESCENT (1) 60W MAX Medium Base		BK-Black WH-White
		LED LIGHT SOURCE		
		E26 MEDIUM BASE LED LE26-A19 800lm ☆	CCT C-4K W-3K	
		ALUMINUM BACK PAN - DEDICATED LED		
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED LR12-13W 1000lm ☆ LR15-15W 1400lm ☆	CCT C-4K W-3K	BK-Black WH-White
		120-277V MULTI-VOLT LED L11-11W 912lm	CCT 4K	

Title 24 & GU24 Available
(call for details)

156FM-BK

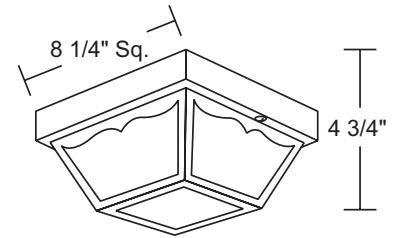


GUIDE: 157FM-WH



157FM-WH

Title 24 & GU24 Available
(call for details)

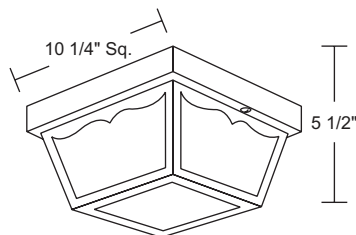

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION	
157FM	POLYPROPYLENE Frosted	POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET			
		INCANDESCENT (2) 60W MAX Medium Base		BK-Black WH-White	
		LED LIGHT SOURCE			
		E26 MEDIUM BASE LED 2LE26-(2)A19 800lm ☆	CCT C-4K W-3K		
		ALUMINUM BACK PAN - DEDICATED LED			
		LED LIGHT SOURCE			
		120V LIGHTWAVE LED LR12-13W 1000lm ☆ LR15-15W 1400lm ☆ LR22-23W 1900lm ☆	CCT C-4K W-3K	BK-Black WH-White	O-Occupancy Sensor
		120-277V MULTI-VOLT LED L22-22W 1824lm	CCT 4K		

☆ **Lamp Included**
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.