




PROJECT _____

TYPE _____

VOLTAGE _____

OUTDOOR CEILING FIXTURE 165FM

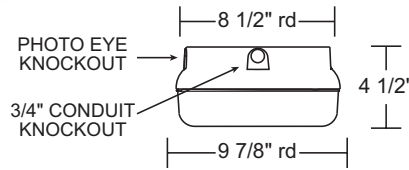

Wave Lighting's 165FM adds a contemporary look to any outdoor space. This fixture can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. Wave Lighting's 165FM is designed for ceiling applications and mounting hardware is included. Options include Emergency Backup and Occupancy Sensor.

LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty
- Energy Star

LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L₇₀
- 4000K CCT 80CRI
- 3 Year Warranty
- Energy Star

E26 REPLACEABLE LED - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty
- Energy Star



SPECIFICATIONS

- Black or White Finish
- Mounting Hardware Included
- Knockouts For Conduit
- Bug and Tamper Resistant Design
- Opal or Frosted Prismatic Diffuser Options
- Ceiling and Wall Mount
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

GUIDE: 165FM-LR22W-WH

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION	
165FM	POLYCARBONATE Opal F-Frosted Prismatic	INCANDESCENT (2) 60W MAX Medium Base	BK-Black WH-White	EB-Emergency Backup OS-Occupancy Sensor PC-Photocell	
		LED LIGHT SOURCE			
		LIGHTWAVE LED			CCT C-4K W-3K
		LR12-13W 1000lm 80CRI			
		LR15-15W 1400lm 80CRI			
		LR22-23W 1900lm 80CRI			
LT12-12W 1040lm 90CRI					
LT15-16W 1400lm 90CRI					
LT22-24W 2020lm 90CRI					
LED MULTI-VOLT SYSTEM	4K				
L22-22W 1824lm ☆					
E26 REPLACEABLE LED	C-4K W-3K				
2LE26-(2)10W 800lm ☆					

☆ Lamp Included Energy Star Qualified Product