


- WALL OR CEILING MOUNT
- INSECT & DUST PROOF
- ENCLOSED & GASKETED
- DIE CAST ALUMINUM
- HOSE DOWN
- IP65 RATED




166FM
Ring

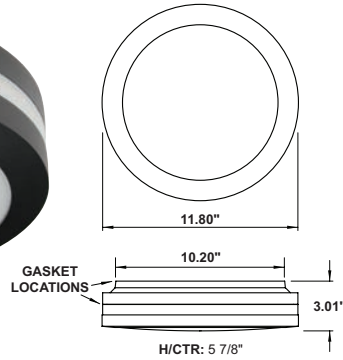

SCAN FOR VIDEO



169FM
Eyelid

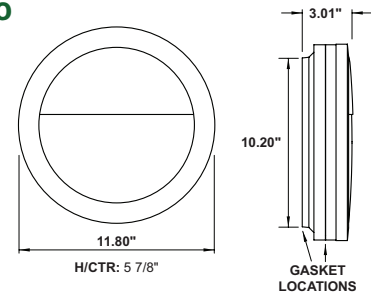

GUIDE: 166FMF-LR15C-BK


ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
166FM	POLYCARBONATE	LED LIGHT SOURCE	BK-Black	O-Occupancy Sensor
169FM	F-Frosted	120V LIGHTWAVE LED LR15-15W 1400lm LR22-23W 1900lm	WH-White CCT C-4K W-3K	

- WALL MOUNT
- INSECT & DUST PROOF
- ENCLOSED & GASKETED
- PHOTOCELL INCLUDED
- HOSE DOWN
- IP65 RATED



GUIDE: 266FMF-LR12-BZ

ITEM #	DIFFUSER/HOUSING	LIGHT SOURCE	COLOR
266FM	POLYCARBONATE F-Frosted	LED LIGHT SOURCE	BZ-Bronze
		120V LIGHTWAVE LED LR12-13W 1000lm	CCT C-4K

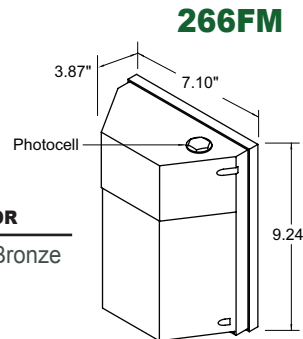

Energy Star Qualified Product

SPEC SHEETS AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.