


- Direct/Indirect Light
- Uplight & Downlight
- Occupancy Sensors



**168FM**  
Standard

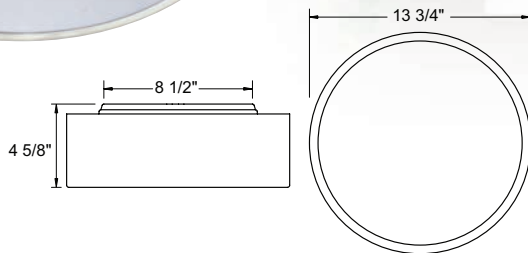

**GUIDE: 168FM-LR12C-BN-OS**

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION	
<b>168FM</b>	White	<b>INCANDESCENT</b> (2) 40W MAX Medium Base	<b>BN</b> -Brushed Nickel	<b>CK</b> -Cable Kit <b>PK</b> -Pendant Kit <b>OS</b> -Occupancy Sensor  (CK & PK can not be combined)	
		<b>LED LIGHT SOURCE</b>			
		<b>120V LIGHTWAVE LED</b>			<b>CCT</b>
		<b>LR15-15W 1400lm</b>			<b>C-4K</b>
		<b>LR22-23W 1900lm</b>	<b>W-3K</b>		
		<b>E26 MEDIUM BASE LED</b>			
		<b>2LE26-(2) A19 800lm</b>			

**Title 24 Available**  
(call for details)


SCAN FOR VIDEO



**OPTIONAL MOUNTING KITS**  
Mounting kits ship in separate packaging. Assembly required.

**PENDANT KIT**  
6"/13" Pendant

**CABLE KIT**  
36" Max Cable

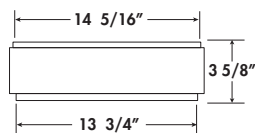

**GUIDE: 178FM-LR24W-BN**

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
<b>178FM</b>	White	<b>LED LIGHT SOURCE</b>	<b>BN</b> -Brushed Nickel	<b>PK</b> -Pendant Kit
		<b>120V LIGHTWAVE LED</b>		
		<b>LR24-24W 1850lm</b>	<b>W-3K</b>	

**178FM**  
Low Profile



**Lamp Included**  
 **Energy Star Qualified Product**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

**WAVE LIGHTING • PHONE 877.870.WAVE (9283)**