


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

1

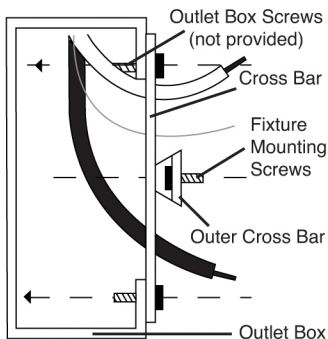


THREAD fixture mounting screws (provided) into outer cross bar.
ATTACH cross bar to outlet box with outlet screws (not provided).

2

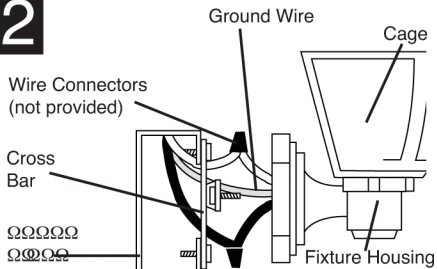


CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Use approved electrical tape or connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. **NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.**

3

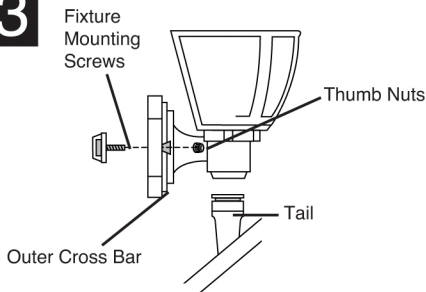

POSITION THE FIXTURE HOUSING over the fixture mounting screws and secure in place with thumb nuts provided.
INSERT TAIL into bottom of fixture and turn clockwise.

4

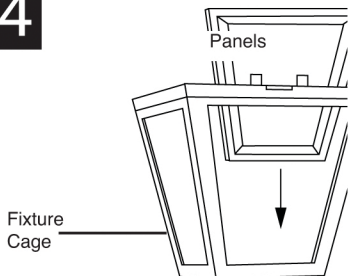


Install plastic panels, textured or beveled side up, by sliding panels down cage in slots on inside of cage. Make sure panels are all the way down in seats in cage.


INSTALLATION INSTRUCTIONS

(CONTINUED FROM OTHER SIDE)

5

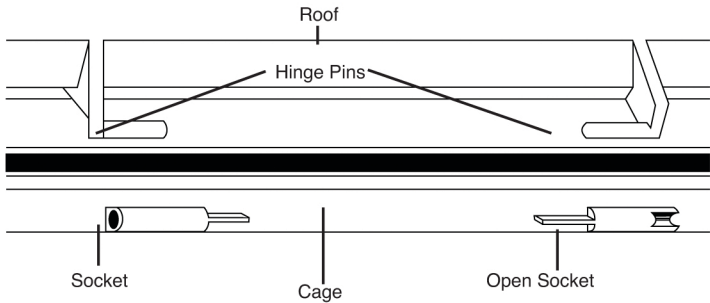


6

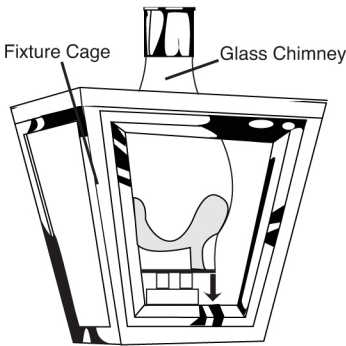

BEFORE SNAPPING ROOF SHUT, insert bulb into socket. Be sure to use bulb with wattage no greater than specified for this fixture. Slide glass chimney (if provided) over bulb and position into molded ring in bottom of cage. Lower roof and snap into place.

7

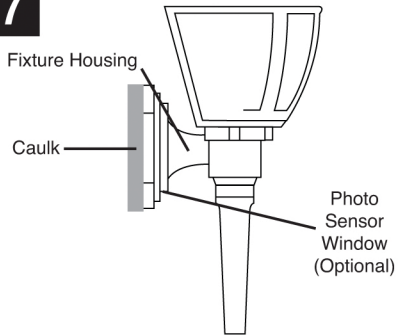

NOTE: Fixture must be caulked with an acrylic caulk where fixture housing meets mounting surface. This provides a water tight seal when fixture is installed.

OPTIONAL PHOTO SENSOR: If this fixture has a photo sensor switch do not apply excessive force to leads connected to photo sensor. Photo sensor must remain in clear window for proper operation.

WARNING-RISK OF FIRE. Most dwellings built before 1985 have wire rated 60°. Consult a qualified electrician before installing. If supply wires are located within three inches of ballast, use wire rated for at least 90°C.

COLD WEATHER STARTING INFORMATION: For temperatures below 25° leave the PL9 on continuously - starting with warm lamps. **NOTE:** If lamp starting becomes a problem in any cold weather application; remove the lamp(s) from the fixture - bring the lamps indoors so that they become warm - then reinstall the lamp(s) into the fixture and leave the fixture on continuously. Do not place lamp(s) in an oven, or microwave or similar device.



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.