



OUTDOOR POST FIXTURE 411/412

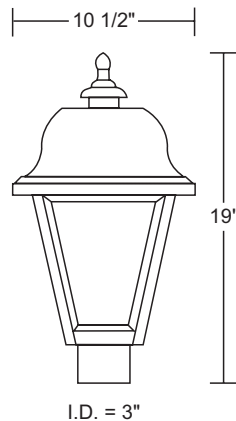

Chimney Included



SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Clear, Amber or Frosted Acrylic Diffuser
- Post Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

Wave Lighting's 411/412 adds a welcoming look to any outdoor space. This fixture can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. Wave Lighting's 411/412 fits on a 3" diameter pole (sold separately) mounting hardware is included.

LED SOURCE OPTIONS

LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L₇₀
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty

E26 REPLACEABLE LED - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L₇₀
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty

GUIDE: 412-LR12W

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	LENS	LIGHT SOURCE	
411 -White 412 -Black	ACRYLIC Clear Beveled A -Amber Beveled Diamond C -Clear Beveled Diamond F -Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base	
		LED LIGHT SOURCE	
		LIGHTWAVE LED LR12 -13W 1000lm 80CRI LR15 -15W 1400lm 80CRI LR22 -23W 1900lm 80CRI LT12 -12W 1040lm 90CRI LT15 -16W 1400lm 90CRI LT22 -24W 2020lm 90CRI	CCT C -4K W -3K
		E26 REPLACEABLE LED LE26 -10W 800lm ★	C -4K W -3K

★ Lamp Included

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 1/19