

PARTS LIST

- 1 - Cage and Fitter Assembly
- 1 - Canopy (attached to cage)
- 4 - Lens Panels (Clear; Frosted; Clear Diamond; or Amber Diamond depending on model purchased)
- 1 - Parts Bag containing:
 - 1 - Decorative Finial
 - 1 - Top Cap (2-3/8" X 1")
 - 1 - Cup (1-3/4" X 3/4")
 - 1 - 2" long Steel Nipple
 - 2 - 1/4" long S/M screws

ASSEMBLY INSTRUCTIONS

1. Press Canopy clips together and tip Canopy open.
2. Affix the Cup to the top of the Canopy.
3. Screw the Locknut to one end of the 2" long Steel Nipple and insert the nipple assembly up through the hole in the top of the Canopy.
4. Position the Cap on top of the Cup and attach the Finial to the Nipple by finger-tightening in a clockwise direction.

PANEL INSERTION INSTRUCTIONS

(The raised beveled portion of the Lens Panels are to face to the outside of the Lantern Cage.)

1. Insert the small end of the Lens Panel into one of the four (4) slots inside the Cage. (NOTE: All panels will fit into position easily with the exception of the last panel. After inserting it into the slot, it will be necessary to apply downward pressure at the top of this final panel to snap it into position.)
2. After the four (4) Lens Panels have been installed, apply downward pressure on all panels to assure proper seating of the lens.

INSTALLATIONS INSTRUCTIONS


CAUTION: BE SURE THE ELECTRIC POWER IS SHUT OFF AT THE MAIN BREAKER PANEL OR FUSE BOX PRIOR TO ELECTRICAL HOOKUP OF THIS OR ANY ELECTRICAL FIXTURE!

(For safety and ease of installation it is recommended that at least two (2) people be utilized for Step #1.)

1. Connect the Black and White Lantern wires and the Green ground wire from the Lantern to the corresponding Black and White power supply wires and the ground wire using approved wire connectors (not provided). **RECHECK ALL ELECTRICAL CONNECTORS FOR LOOSE OR EXPOSED WIRES BEFORE PROCEEDING!**

NOTE: The above wiring instructions apply only to a direct connection from the Lantern to the power supply. If a photo-electric cell is involved in the installation, the wiring scheme will differ from the above instructions, and the installer must refer to the manufacturer's wiring instructions furnished with the photo-cell.

2. Position the Lantern on top of the post. When in desired position, drill two (2) 7/64" holes into the post using the two (2) holes in the Lantern fitter as guides and install the (2) 1/4" long sheet/metal screws provided.
3. Install lamp type/wattage specified on fixture and replace the canopy.
4. Turn power on at main control panel only after installation is complete.

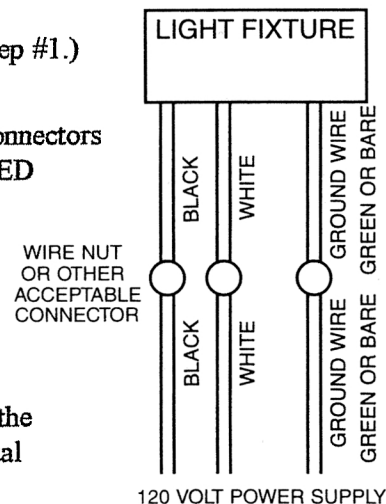

ALWAYS CONNECT BLACK TO BLACK, WHITE TO WHITE, AND BARE OR GREEN GROUNDING CONDUCTORS

Customer Service **1-877-870-9283**
www.wavelighting.com

